

E70 Series Sensors

SM Series Sensors



5.0	Introduction	
	Quick Reference Guide	V8-T5-2
	Technical Reference	V8-T5-4
	Product Selection Guide	V8-T5-6
5.1	E70 Series Sensors	
	Product Description	V8-T5-9
	Product Selection	V8-T5-11
5.2	Enhanced 50 Series Sensors	
	Product Description	V8-T5-15
	Product Selection	V8-T5-16
5.3	IntelliView Series Sensors	
0.0	Product Description	V8-T5-33
	Product Selection	V8-T5-34
5.4	SM Series Sensors	
5.4	Product Description	V8-T5-48
	Product Description	V8-15-40 V8-T5-50
5.5	Comet Series Sensors	
	Product Description	V8-T5-54 V8-T5-56
		V0-10-00
5.6	Prism Series Sensors	
	Product Description	V8-T5-69
	Product Selection	V8-T5-70
5.7	OEM Prism Series Sensors	
	Product Description	V8-T5-78
	Product Selection	V8-T5-79
5.8	E58 Harsh Duty Series Sensors	
	Product Description	V8-T5-84
	Product Selection	V8-T5-86
5.9	E67 Long Range PerfectProx Series Sensors	
	Product Description	V8-T5-93
	Product Selection	V8-T5-94
5.10	E51 Limit Switch Style, Modular Sensors	
	Product Description	V8-T5-97
	Product Selection	V8-T5-98



Unless otherwise noted, the products contained in this section should not be used for functional safety applications. These products were not designed or tested to IEC 60947-5-3 or recommended for functional safety.

Volume 8-Sensing Solutions CA08100010E-October 2024 www.eaton.com



For Customer Service in the U.S. call 1-877-ETN CARE (386-2273), in Canada call 1-800-268-3578. For Application Assistance in the U.S. and Canada call 1-800–426-9184. Introduction

Quick Reference Guide

Photoelectric Sensors

ising Application	Sensing Style	Maximum Range	Product Family	Page
	Through beam	20 ft (6 m)	Prism™ Series Sensors	V8-T5-69
Target		50 ft (15 m)	SM Series™ Sensors	V8-T5-48
		80 ft (24 m)	Comet [®] Series Sensors	V8-T5-54
		500 ft (152 m)	Enhanced 50 Series™ Sensors	V8-T5-15
Detector		800 ft (250 m)	E58 Harsh Duty Series Sensors	V8-T5-84
	Diffuse reflective	8 in (200 mm)	SM Series Sensors	V8-T5-48
		8 in (200 mm)	Prism Series Sensors	V8-T5-69
Target		24 in (610 mm)	Comet Series Sensors	V8-T5-54
i di got		28 in (700 mm)	E70 Series Sensors	V8-T5-9
Diffuse		10 ft (3 m)	Enhanced 50 Series Sensors	V8-T5-15
Reflective Sensor				
	Fixed Focus PerfectProx [®]	4 in (100 mm)	E70 Series Sensors	V8-T5-9
		4 in (100 mm)	SM Series Sensors	V8-T5-48
Target		9 in (225 mm)	Comet Series Sensors	V8-T5-54
		11 in (280 mm)	E58 Harsh Duty Series Sensors	V8-T5-84
		79 in (200 cm)	E67 Long Range PerfectProx Series Sensors	V8-T5-93
Fixed Focus PerfectProx Sensor	Background suppression	47.2 in (120 cm)	IntelliView™ Series Sensors	V8-T5-33
Target	Standard reflex	15 ft (4.5 m)	Prism Series Sensors	V8-T5-69
		25 ft (7.6 m)	Comet Series Sensors	V8-T5-54
		00 (1 (0)	E70 Series Sensors	
		26 ft (8 m)	L/0 061163 06113013	V8-T5-9
Retroreflector		26 ft (8 m) 30 ft (9 m)	Enhanced 50 Series Sensors	V8-T5-9 V8-T5-15
Retroreflector				
Reflex	Polarized reflex	30 ft (9 m)	Enhanced 50 Series Sensors	V8-T5-15
	Polarized reflex	30 ft (9 m) 59 ft (18 m)	Enhanced 50 Series Sensors E58 Harsh Duty Series Sensors	V8-T5-15 V8-T5-84
Reflex	Polarized reflex	30 ft (9 m) 59 ft (18 m) 10 ft (3 m)	Enhanced 50 Series Sensors E58 Harsh Duty Series Sensors SM Series Sensors	V8-T5-15 V8-T5-84 V8-T5-48
Reflex	Polarized reflex	30 ft (9 m) 59 ft (18 m) 10 ft (3 m) 15 ft (4.5 m)	Enhanced 50 Series Sensors E58 Harsh Duty Series Sensors SM Series Sensors Comet Series Sensors	V8-T5-15 V8-T5-84 V8-T5-48 V8-T5-54
Reflex	Polarized reflex	30 ft (9 m) 59 ft (18 m) 10 ft (3 m) 15 ft (4.5 m) 16 ft (5 m)	Enhanced 50 Series Sensors E58 Harsh Duty Series Sensors SM Series Sensors Comet Series Sensors E70 Series Sensors	V8-T5-15 V8-T5-84 V8-T5-48 V8-T5-54 V8-T5-9
Reflex	Polarized reflex Clear object detector	30 ft (9 m) 59 ft (18 m) 10 ft (3 m) 15 ft (4.5 m) 16 ft (5 m) 16 ft (5 m)	Enhanced 50 Series Sensors E58 Harsh Duty Series Sensors SM Series Sensors Comet Series Sensors E70 Series Sensors Enhanced 50 Series Sensors	V8-T5-15 V8-T5-84 V8-T5-48 V8-T5-54 V8-T5-9 V8-T5-15

Introduction

Photoelectric Sensors, continued

Sensing Application	Sensing Style	Maximum Range	Product Family	Page
	Fiber optic infrared LED	2.5 ft (762 mm)	Comet Series Sensors	V8-T5-54
Source Fiber	glass cable	5.8 ft (1.77 m)	Enhanced 50 Series Sensors	V8-T5-15
	Fiber optic visible LED	5 in (127 mm)	Comet Series Sensors	V8-T5-54
Target Sensor Detector Fiber	plastic cable	6 in (152 mm)	Enhanced 50 Series Sensors	V8-T5-15
Target Retroreflector	Conveyor sensor system	10 ft (3 m)	E68 Series™ Integral Sensor-Valve	V8-T6-3
Sensor		10 ft (3 m)	200 Series Zero Pressure Accumulation	V8-T6-14
Color Sensor	Color sensing	1.77 in (45 mm)	IntelliView Series Sensors	V8-T5-33
Contrast Sensor Target	Contrast sensing	0.39 in (10 mm)	IntelliView Series Sensors	V8-T5-33

Introduction

Technical Reference

Photoelectric Sensors



Introduction

Photoelectric sensors use light to detect the presence or absence of an object. The main advantages of photoelectric sensors are noncontact sensing of objects and greatly extended sensing ranges.

Choosing the Right Sensor

There are many factors to consider when choosing a photoelectric sensor. The specific demands of your application will dictate the sensor required for the job. The following questions and suggested reference areas will help you select the best sensor for your application:


- What range is required (how far is the sensor from the object to be detected)? (See "Modes of Detection", "Range" and "Excess Gain")
- What is the nature of the environment? (See "Contamination")

- What access do you have to both sides of the object to be detected (is wiring possible on one or both sides of the object)? (See "Modes of Detection")
- What size is the object being detected? (See "Modes of Detection")
- Is the object consistent in size, shape, and reflectivity? (See "Modes of Detection, PerfectProx")
- What are the mechanical and electrical requirements? (Check the electrical specifications of the desired sensor)

- What kind of output do you need? (Check the electrical specifications of the desired sensor)
- Are logic functions needed at the sensing point? (If so, look for sensors with logic modules or built-in logic functions)


Introduction

Modes of Detection Thru-Beam



Source and detector elements are mounted in separate housings and aligned facing each other across an area which the target object crosses. Detection occurs when an object blocks the entire effective beam (the column of light that travels in a straight line between lenses). See Page V8-T5-56.

Reflex



The source and detector are mounted in a single sensor housing and are positioned parallel to one another on the same side of the object to be detected. The light beam is transmitted from the source to a retroreflector that returns the light to the detector. Detection occurs when the target object blocks the entire effective beam. See Page V8-T5-57.

Reflex Detection Mode



Object Detected

and aligned with crossed fields of view. When the target moves into this area light from the source is reflected off the target surface back to the detector and detection occurs. See Page V8-T5-58.

Diffuse Reflective Detection Mode



Diffuse Reflective

Diffuse

Sensor

Reflective

The source and detector

elements are mounted in a


single sensor housing and are

positioned on the same side

of the object to be detected







PerfectProx is a special type of diffuse reflective sensor that combines extremely high sensing power (excess gain) with a sharp optical cutoff. This allows the sensor to reliably detect targets regardless of variations in color. reflectance, contrast or surface shape, while ignoring background objects that are just slightly beyond the target range. See Page V8-T5-59.

Range


Each sensor listed in this catalog has a specific operating range. In general, thru-beam sensors offer the greatest range (most power), followed by reflex and then diffuse reflective sensors. Operating ranges vary, and there is some overlap among types and models. See Applying Excess Gain on Page V8-T12-30.

Excess Gain

Excess gain is a measure of the sensing power available in excess of that required to detect an object. The following excess gain chart shows this measurement graphically. Find your required range on the x-axis of the graph. Then move up to the

curve to read the excess gain value from the y-axis. An excess gain value of 1 is the minimum level required for sensor operation. Eaton normally recommends excess gain levels ≥10 for reliable sensor operation. See Page V8-T12-30.

Photoelectric Sensor Excess Gain Graph



Note: The excess gain charts in this catalog represent the minimum excess gain provided by the sensor (unless otherwise noted). Actual performance may be better.

Contamination

The chart on Page V8-T12-32 shows the excess gain recommended in environments with varying levels of contamination for each sensing mode.

Introduction

Product Selection Guide

E70 Series Sensors



V8-T5-9

5

Overview

The E70 Series from Eaton is a family of miniature rectangular photoelectric sensors designed for sensing performance and optimum value in a wide range of applications.

Sensing Types and Ranges

Reflex: 26 ft Polarized reflex: 16 ft Diffuse reflective: 28 in PerfectProx background rejection: 2 and 4 in

Product Features

Powerful optics in a very compact housing Visible red sensing beams on all models 26-foot sensing range in reflex versions, and 28-inch diffuse reflective performance Highly visible indicator LEDs Built-in M12 connector and cable options Reverse polarity, overload and short circuit protection on all models

Technical Data and Specifications

Input voltage—10–30 Vdc Maximum load current—100 mA Output saturation voltage—2 V max. Enclosure rating—IP67, NEMA 6 Resoonse time—1 ms max.

Approvals

UL® Listed, E166051 UL tested to Canadian safety standards CE RoHS compliant UKCA certified



Enhanced 50 Series Sensors



V8-T5-15

Overview

The Enhanced 50 Series family provides outstanding optical performance and application flexibility in a self-contained, industry-standard package.

Sensing Types and Ranges

Thru-beam: 200 and 500 ft Reflex: 30 ft Polarized reflex: 16 ft Diffuse reflective: 5 and 10 ft Clear object detector: 45 in Infrared fiber optic: range varies with fiber Visible fiber optic: range varies with fiber

Product Features

High optical performance including 10 ft diffuse and 500 ft thru-beam versions Output options include a high-current 10 Amp SPDT relay Built-in light/dark selection on all models Logic options include ON-delay, OFF-delay and one-shot delay Multiple connector and cable options Industry standard package size

Technical Data and Specifications

Operating voltage— 24–240 Vac and 12–240 Vdc; 10–40 Vdc Output function— Selectable light or dark operate Maximum load current— DC units: 250 mA AC/DC units: 300 mA to 10A Enclosure ratings— IP67, IP69 Response time range— DC operation: 2 ms AC operation: 15 ms

Approvals

CSA[®] certified, 224447 Products certified by CSA for U.S. CE RoHS compliant

ions compliant





V8-T5-33

Overview

The IntelliView Series from Eaton is a family of compact, high performance specialty photoelectric sensors designed to solve a wide array of sensing challenges.

IntelliView Series Sensors

Sensing Types and Ranges

Foreground/background suppression Distance sensing Color, contrast, luminescence, and grayscale sensing

Product Features

Sensing technologies for detecting color, contrast, luminescence and distance with great accuracy

Available in either compact rectangular or flat-tubular package sizes

Most models include a teach mode, allowing for quick and simple installation and setup


For the first time, Eaton offers a fully fieldadjustable background suppression photoelectric sensor capable of detecting targets as far as 3.9 ft (47 in) away

Technical Data and Specifications

Input voltage— Foreground models: 10–30 Vdc Distance models: 16–28 Vdc Output saturation voltage— All models: < 2V max. Enclosure ratings— Foreground models: E75-PPA_: IP65 E75-PP1_: IP67 Distance models: IP67 Response time range— Varies by model

Approvals

UL Listed, E166051 UL tested to Canadian safety standards CE RoHS compliant



SM Series Sensors



V8-T5-48

Overview

SM Series photoelectric sensors provide high performance and ease of use in an economical, compact package.

Sensing Types and Ranges

Thru-beam: 50 ft Polarized reflex: 10 ft Diffuse reflective: 8 in PerfectProx background rejection: 2 and 4 in

Product Features

Highly visible LED indicators for power, output and alignment (TargetLock™) TargetLock simplifies setup and ensures that the sensor operates at the highest level of reliability possible

PerfectProx models sense different colored targets at the same range and ignore objects in the background

Visible beam on all models lets you see exactly where the sensor is pointing Small size


Reverse polarity, overload and short circuit protection on all models

Technical Data and Specifications

Operating voltage— 18–264 Vac and 18–50 Vdc; 10–30 Vdc Output function— Light and dark operate models available Maximum load current— AC/DC units—200 mA DC units—100 mA (NPN or PNP) Enclosure ratings— NEMA® 1, 3, 4, 4X, 6, 6P, 12 and 13 IP68, IP69 Response time range— DC operation: 1 ms AC operation: 16 ms

Approvals

UL Listed, E166051 UL tested to Canadian safety standards CE (DC models only) RoHS compliant



Introduction

Comet Series Sensors



V8-T5-54

Overview

This high performance, 18 mm tubular sensor family features a wide variety of models in all sensing modes to solve all of your sensing problems.

Sensing Types and Ranges

Thru-beam: 20 and 80 ft Reflex: 25 ft Polarized reflex: 15 and 10 ft Diffuse reflective: 8 and 24 in Focused diffuse reflective: 1.6 in See **Page V8-T5-55** for wide angle diffuse and PerfectProx information

Product Features

The 18 mm tubular body has flat sides for added mounting flexibility Available in universal voltage AC/DC versions as well as DC only models Short circuit protection on all models RIM (Reaction Injection Molding) process completely encapsulates circuits and produces a rugged package

Technical Data and Specifications

Operating voltage— 90–132 Vac and 18–50 Vdc 20–264 Vac and 15–30 Vdc; 10–30 Vdc Output function— Selectable light or dark operate Maximum load current— AC/DC units—300 mA DC units—250 mA (NPN), 100 mA (PNP) Enclosure ratings— NEMA 1, 2, 3, 4, 4X, 6, 12, 13 and IP69 Response time range— DC operation: 1 ms/AC operation: 10 ms 2W AC/DC operation: 32 ms

Approvals

UL Recognized, E117028 CSA certified, 50513 CE (DC models only) RoHS compliant



Prism Series Sensors

Prism is a cost-effective line of 18 mm

tubular photoelectric sensors with twice

the optical gain of other sensors in this

Glass fiber optic: range varies with fiber

Isolated output simplifies wiring and allows

each sensor to switch AC or DC loads, sink

Forward or right angle viewing units have

The 18 mm tubular body has flat sides for

Short circuit protection for loads less than

AC/DC and DC-only versions available

Technical Data and Specifications

20-132 Vac and 15-30 Vdc; 10-30 Vdc

Isolated VMOS solid-state relay output

Light and dark operate models available

NEMA 1, 2, 3, 4, 4X, 6, 12 and 13

identical optical performance

added mounting flexibility

Sensing Types and Ranges

V8-T5-69

Overview

product class.

Thru-beam: 20 ft

Polarized reflex: 10 ft

Diffuse reflective: 8 in

Product Features

or source

32 Vac or Vdc

High noise immunity

Operating voltage-

Output function-

80 mA AC load

Approvals

3 ms

110 mA at 132 Vdc

Enclosure ratings-

Response time range-

UL Recognized, E117028

UL tested to Canadian safety standards

CE (DC reflex forward viewing only)

Maximum load current-

Reflex: 15 ft



V8-T5-78

Overview

OEM Prism Series Sensors

OEM Prism Sensors are similar to our

standard cost-effective Prism family and

are optimized for high volume OEM use.

Sensing Types and Ranges

Diffuse reflective: 8 and 24 in

Polarized reflex: 10 ft

Product Features

E58 Harsh Duty Series Sensors



V8-T5-84

Overview E58 Harsh Duty Photoelectric Sensors were designed to withstand your harshest

physical, chemical and optical environments, 18 and 30 mm tubular enclosures.

Sensing Types and Ranges

Thru-beam: 800 ft Reflex: 59 ft Polarized reflex: 34 ft PerfectProx background rejection: 2, 4, 6 and 11 in

Product Features

The 18 mm tubular body has flat sides for Designed to be the most rugged added mounting flexibility photoelectric sensor available Forward or right angle viewing units have PerfectProx background rejection identical optical performance technology for unmatched optical performance Sensors are shipped bulk-packaged for the convenience of high volume users Output status indictor is the brightest available and is visible from any angle and Dual discrete outputs for simple wiring in any lighting condition All models 10-30 Vdc only to meet the Available in universal voltage AC/DC evolving needs of your customers

Technical Data and Specifications

Operating voltage— 10–30 Vdc Output function— Light and dark operate models available Maximum load current— 100 mA Enclosure ratings— NEMA 1, 2, 3, 4, 4X, 6, 12 and 13 Response time range— 1.2 ms

Approvals

RoHS compliant

OHS

Operating voltage— See **Page V8-T5-84** for more information Output function— Light and dark operate models available Maximum load current—

AC/DC units—300 mA (100 mA for 18 mm diameter units) DC units—250 mA (NPN), 100 mA (PNP) Enclosure ratings— NEMA 1, 2, 3, 3R, 3S, 4, 4X, 6, 6P, 12, 12K, 13 and IP69 Response time range— 2 ms to 35 ms

versions as well as DC only models

18 mm and 30 mm models available

Technical Data and Specifications

Approvals

UL Listed, E166051 UL tested to Canadian safety standards CE (DC models only) RoHS compliant



5.0

Photoelectric Sensors

Introduction

E67 Long Range PerfectProx Series Sensors



V8-T5-93

Overview

This is the highest performance long-range sensor you can buy with background rejection.

Sensing Types and Ranges

PerfectProx 24 to 96 in Standard model pre-set at 6 ft. Fixed ranges of 2–8 ft are available.

Product Features

Extended sensing ranges (up to 8 ft) available with background rejection technology

No user adjustments required

Dual indicators communicate both output and power status from easy-to-see location on the top of the sensor

AC/DC models offer isolated contact output for wiring flexibility

DC sensors offer both NPN and PNP output Two mounting options for maximum flexibility

Technical Data and Specifications

Operating voltage— 18–30 Vdc and 20–132 Vac/dc Output function— NPN and PNP (DC) Solid-state relay, 1500V isolation (AC/DC) Light and dark operate models available Maximum load current— 100 mA DC 75 mA AC/DC Enclosure ratings— NEMA 1, 2, 3, 4, 4X, 6, 12 and 13 Response time range— 50 ms (AC/DC) and 15 ms (DC)

Approvals

RoHS compliant



E51 Limit Switch Style, Modular Sensors



V8-T5-97

Overview

This versatile sensing family features modular construction, a variety of operating modes and a familiar limit switch style housing.

Sensing Types and Ranges

Thru-beam: 300 ft Reflex: 18 and 35 ft Polarized reflex: 15 ft Diffuse reflective: 8, 18 and 40 in Glass fiber optic: range varies with fiber

Product Features

Modular construction consisting of a head, sensor body and receptacle Most E51 photoelectric and inductive heads are interchangeable on all E51 sensor bodies for substantial inventory reduction Same general configurations and dimensions as the E50 limit switch Order as complete assemblies or components for stocking and manufacturing flexibility Keyed, for directional head positioning

Technical Data and Specifications

Operating voltage— 20–264 Vac/dc; 120 Vac; 10–30 Vdc Output function— NO or NC (programmable); or NO and NC (complementary) sensor bodies are available Maximum load current— AC—1.0A continuous DC—0.6A continuous Enclosure ratings— NEMA 3, 3S, 4, 4X, 6, 6P and 13 Class I, II, III, Division 2, Groups A, B, C, D, F and G (conduit entry only) Response time range— 1 ms to 30 ms

Approvals

UL Listed, E166051, E183975 CSA certified, 50513



Legacy Sensor Products

See for product information and ordering information for these legacy products:

- E58 18 mm Tubular Series
- E64 Terminal Base Series
- E65 Miniature Series
- 11 Series
- 20 Series
- 50 Series
- 55 Series
- 60 Series
- 70 Series
- 80 Series

E70 Series Sensors

Page

E70 Series Sensors



Contents Description E70 Series S Broduct C

<i>comption</i>	rage
70 Series Sensors	
Product Overview	V8-T5-10
Product Selection	V8-T5-11
E70 Series Sensors	V8-T5-11
Compatible Connector Cables	V8-T5-12
Accessories	V8-T5-12
Technical Data and Specifications	V8-T5-13
Excess Gain	V8-T5-13
Wiring Diagrams	V8-T5-14
Dimensions	V8-T5-14

E70 Series Sensors

Product Description

The E70 Series from Eaton's Electrical Sector provides high performance and ease of use in an economical, compact package.

Lock In on Great Performance with TargetLock

A sensor can have the greatest performance in the world, but if it is slightly misaligned or the target is positioned at the wrong range, you will have reliability problems sooner or later. TargetLock not only simplifies sensor setup but visually confirms your sensor is positioned to operate with the highest possible reliability. In addition, TargetLock provides diagnostic information during use to inform you of impending problems, before they result in equipment downtime. This feature is available in Standard Reflex and Polarized Reflex models in the E70 product family.

No Sensor Is Easier to Use

The E70 Series includes many other features that simplify use. Visible sensing beams on all models show you exactly where the sensors are pointing. The durable housing features multiple mounting options to easily fit on your equipment in the tightest of spaces. Full protection from overload, reverse polarity and short circuits reduces the chance of damage. Bright LED indicators visible over a wide angle vertically and horizontally clearly show sensor status.

Application Description

Typical Applications

- Packaging machines
- Conveyors and other material handling equipment
- Food processing equipment
- Assembly equipment
- Pharmaceutical machines
- Baggage handling systems
- Security systems
- Parts handling equipment
- Metalworking equipment

Features

- Highly visible LED indicators for power, output and TargetLock
- TargetLock simplifies setup and ensures the sensor operates at the highest level of reliability
- PerfectProx models sense different colored targets at the same range and ignore objects in the background
- DC-only models feature both Light Operate and Dark Operate output functions
- Visible sensing beams on all models let you see exactly where the sensor is pointing
- Compact size to fit in tight spaces
- Multiple mounting options including industry standard 18 mm threads
- Reverse polarity, overload and short circuit protection
- Full family includes standard reflex, polarized reflex, diffuse reflective and PerfectProx background rejection versions

Standards and Certifications

- UL Listed, E166051UL tested to Canadian
- safety standardsCE (DC models only)
- RoHS compliant
- UKCA compliant



DANGER

THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.

For the most current information on this product, visit our website: www.eaton.com/sensors For Customer Service in the U.S. call 915-401-8307, in Canada call 1-800-268-3578. For Application Assistance in the U.S. and Canada call 1-877-ETN CARE (386-2273).

Product Overview

Unparalleled Optical Performance—PerfectProx

Exceptional background rejection sets PerfectProx apart from all other sensors. Just point the sensor's visible beam at the target and get reliable detection regardless of color, reflectance, contrast or surface shape, while ignoring background objects just a fraction of an inch away.

The E70 Series features an advanced LED indicator display to provide valuable information at a glance. In addition to a power LED, a second output status LED also provides TargetLock system information. The bright display is clearly visible from a wide range of horizontal and vertical angles.

TargetLock is a

microprocessor-controlled system that enables you to quickly and easily align the sensor and ensure it is operating most reliably.

Alignment: The

TargetLock LED provides a quick and easy way to set up the sensor for optimum operation. On initial setup, when you have achieved the minimum signal required for the sensor to operate, the TargetLock LED will blink quickly.

As you improve the setup and approach the best alignment and range, the LED changes from fast flash to slow flash and ultimately to a solid ON condition. This means that even after you reach a point where the sensor will operate in the application, you are able to further fine tune the setup for highest reliability.

Maintenance: Another valuable feature of the TargetLock LED is to indicate the need for maintenance prior to loss of sensor operation. Observing a change from LED (for example, from solid ON to a slow flash) reduced. Possible causes include bumping or vibrating out of alignment or contamination buildup on the lens. With the TargetLock LED, you are made aware of this condition before the sensor stops working, allowing you ample time to address the problem before your machine aoes down.

of the function of each E70 Series LED indicator.

the normal operation of the indicates the gain has been

See table (below) for details


Gain Adjustment

Diffuse reflective sensors include an adjustment control for optimizing the amount of gain for the application. The 3/4-turn pot provides a 10:1 adjustment of gain. A mechanical stop eliminates the possibility of sensor damage. Adjustment of the control does not require any special tools.

Mounting


E70 Series sensors feature two mounting holes in the rectangular section of the body for mounting to a surface with #6 or smaller hardware. The threaded barrel and included jam nut allow mounting into any 0.75 in (19 mm) hole or a selection of accessory mounting brackets available from Eaton and detailed in Tab 8, section 8.2. Additionally, the sensor can be mounted using the extended M12 threads at the base (connector versions only).

Mounting Sensor using #6 Hardware or Jam Nut




with nut recess both sides

Mounting Sensor using Connector Threads



Cable versions with M12 thread mount not present



Note Gain adjustment potentiometer only present in diffuse reflective models.

LED	State	Reflex Models LED Condition	Diffuse/PerfectProx Models LED Condition
Green (power)	ON	Power is applied to sensor	Power is applied to sensor
	OFF	No power to sensor	No power to sensor
	Fast flashing	Fault—short circuit condition detected	Fault—short circuit condition detected
Orange (output)	ON	Sensors aligned to reflector with excellent signal. No target present.	Target present
	Slow flashing	Marginal gain condition detected—sensor aligned to reflector with good signal. No target present.	N/A
	Fast flashing	Marginal gain condition detected—sensor aligned to reflector with poor signal. No target present.	N/A

NPN (Sinking)

5

PNP (Sourcing)

Connection

Product Selection

E70 Series Sensors

Four-Wire Sensors

Optimum

Operating Sensing

	Voltage	Range	Range	Range 1	View	Туре	Catalog Number	Catalog Number
tandard Reflex ^②	Standard	Reflex						
	10-30 Vdc	26 ft (8 m)	0.1 to 25 ft	_	10 in (254 mm)	2 m cable	E70-SR8P-HC	E70-SR8N-HC
			(30 cm to 7.5 m)		diameter at 10 ft (3 m)	4-pin micro DC connector	E70-SR8P-HQ 🏵	E70-SR8N-HQ 🏵
Retro- reflector Sensor								
larized Reflex ^②	Polarized	Reflex						
	10-30 Vdc	16 ft (5 m)	0.1 to 15 ft	_	1 in (25 mm)	2 m cable	E70-PR5P-HC	E70-PR5N-HC
			(30 cm to 4.5 m)		diameter at 50 in (1.3 m)	4-pin micro DC connector	E70-PR5P-HQ 🌐	E70-PR5N-HQ 🄃
Retro- reflector Sensor								
ffuse Reflective	Diffuse Re	eflective						
	10-30 Vdc			_		2 m cable	E70-SD70P-HC	E70-SD70N-HC
		(700 mm) ③	(6 mm to 635 mm)	diameter at 25 in (635 mm)	4-pin micro DC connector	E70-SD70P-HQ 🌐	E70-SD70N-HQ 🏵
erfectProx	PerfectPro	ж						
-	10-30 Vdc	2 in	0.4 to 1.8 in	2.3 in	0.25 in (6 mm)	2 m cable	E70-PP05P-HC	E70-PP05N-HC
RO		(50 mm)	(10 to 45 mm)	(58 mm) and beyond ③	diameter at 2.25 in (57 mm)	4-pin micro DC connector	E70-PP05P-HQ 🏵	E70-PP05N-HQ 🏵
		4 in	0.5 to 3 in	5 in	0.35 in (9 mm)	2 m cable	E70-PP10P-HC	E70-PP10N-HC
		(100 mm)	(13 to 76 mm)	(127 mm) and	diameter at 5 in (127 mm)	4-pin micro DC	E70-PP10P-HQ 🏽	E70-PP10N-HQ 🏽

Field of

Cutoff

Notes

- (a) See listing of compatible connector cables on Page V8-T5-51.
- ^① Sensor will ignore a 90% reflectance white card at this range.
- ² For complete system, order sensor and retroreflector (see Tab 8, section 8.1). Polarizer feature reduces sensitivity to shiny target objects.

beyond ³

micro DC

connector

③ Nominal range—sensor will detect a 90% reflectance white card at this range.

E70 Series Sensors

Compatible Connector Cables



Style,	Standard Cables—Micro [®]									
ht Female	Voltage Style	Number of Pins	Gauge	Length	Pin Configuration/Wire Colors (Face View Female Shown)	PVC Jacket Catalog Number	PUR Jacket Catalog Number	IRR PUR Jacket Catalog Number		
	Micro-Style, Straight Female									
	DC	4-pin, 4-wire	22 AWG	6 ft (2 m)	1-Brown 2-White 3-Blue 4-Black	CSDS4A4CY2202	CSDS4A4RY2202	CSDS4A4I02202		

Note

^① For a full selection of connector cables, see **Tab 10**, **section 10.1**.

Accessories

E70 Series Sensors

Description	Reference		
Retroreflectors and retroreflective tape			
Mounting brackets	See Tab 8, section 8.2		
Replacement mounting nuts and other accessories	See Tab 8, section 8.3		
Connector cables	See Tab 10, section 10.1		

5.1

Technical Data and Specifications

E70 Series Sensors


Description	DC Model Specification
Input voltage	10-30 Vdc
Power dissipation	2 W maximum
Output modes	Light operation and dark operation (dual outputs)
Current switching	100 mA maximum
Voltage switching	30 Vdc maximum
Off state current (I _r)	500 µA maximum
ON-state voltage drop	2.5 V maximum
Response time	1 ms
Protection 1	Short circuit, overload, reverse polarity
NPN/PNP output type	By model
Operating/storage	–13 to 158 °F (–25 to 70 °C), E70-PPxx models –13 to 131 °F (–25 to 55 °C)
Material of construction	Lens: Polycarbonate; cable jacket: PVC; body: PC/ABS
Cable/connector	Cable models: 6 ft (2 m) four-wire cable; Connector models: 4-pin, M12 connector (DC-key)
Vibration and shock	Vibration: 0.5 mm over 10 Hz to 55 Hz per IEC 60068-2-6 Shock: 30 g per IEC 60068-2-27
Indicator LEDs	Green LED: Power / Orange LED: Output, TargetLock
Source light	Visible red, 660 nm
Gain adjustment	3/4-turn pot, 10:1 adjustment of gain (provided on diffuse reflective sensors only)
Sunlight immunity	5000 ft-candles
Enclosure ratings	NEMA 1, 3, 4, 4X, 6, 12 and 13; IP67

Excess Gain


0.0

Reflex and Polarized Reflex


RANGE (m)



PerfectProx



Diffuse Reflective



Diffuse reflective (based on a 90% reflectance white card)

Note

③ Short circuit and overload protection (output indicator LED will flash). Reverse polarity protection (sensor will reset automatically once fault is removed). IMPORTANT: During installation, correct power connections must be made first to ensure fail-safe short circuit protection of the outputs. E70 Series Sensors

Wiring Diagrams

Pin numbers are for reference, rely on pin location when wiring.


E70 Series Sensors

Operating Voltage	Mode	Cable Model	Micro-Connector Model (Face View Male Shown)
Four-Wire Sens	sors		
10–30 Vdc	PNP models	NC WHT LOAD NO BLK LOAD OV	BRN HT HC BLK BLU OV
	NPN models	NC WHT LOAD NO BLK LOAD BLU OV	BRN WHT LOAD NO BLK LOAD BLU OV

Dimensions

Approximate dimensions in mm (inches)


E70 Series Sensors

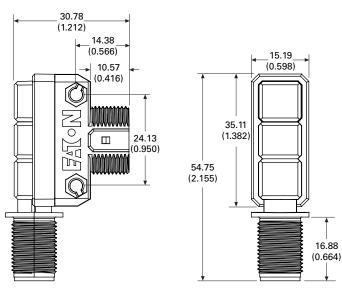

Connector version

Note

① Gain adjustment potentiometer only present in diffuse reflective models.



Cable version

Enhanced 50 Series Sensors

Enhanced 50 Series Sensors



Enhanced 50 Series Sensors

Product Description

The new Enhanced versions of the 50 Series Photoelectric Sensors from Eaton's Electrical Sector offer flexibility, durability and high optical performance in a costeffective self-contained package. Choose from three output types, four time delay functions, six sensing modes and four connection styles to tailor the sensor to exactly meet your needs.

Sensors are available in thrubeam, reflex, polarized reflex, diffuse reflective, clear object, and fiber optic sensing modes. Brackets are available for easy mounting and to allow precise adjustment of sensor alignment.

Features

- High optical performance models including a 500 ft (152 m) thru-beam and a 10 ft (3 m) diffuse reflective unit
- Output options include a 3 A SPDT relay
- All units offer light/dark selection
- Logic options include ON-delay, OFF-delay, ON/OFF-delay and oneshot delay
- Fiber optic sensors operate in thru-beam or diffuse reflective mode depending on the fiber optic cable selected
- Fully potted construction for use in areas subject to washdown, high shock and/or vibration
- Choice of pre-wired power • cable, built-in miniconnector, built-in microconnector and pigtail micro-connector versions. Standard pre-wired cable length is 6 ft (2 m)
- Variety of brackets available including ball swivel

Contents

Standards and Certifications

Products certified by CSA

RŏHS

CSA certified, 224447

for U.S.

• RoHS compliant

<u>ر</u> (()

• CF

Description	Page
Enhanced 50 Series Sensors	
Product Selection	
Thru-Beam Sensors	V8-T5-16
Reflex Sensors	V8-T5-18
Diffuse Sensors	V8-T5-20
Clear Object Sensors	V8-T5-22
Fiber Optic Sensors	V8-T5-23
Compatible Connector Cables	V8-T5-25
Fiber Optic Cables	V8-T5-26
Accessories	V8-T5-27
Technical Data and Specifications	V8-T5-27
Excess Gain	V8-T5-28
Wiring Diagrams	V8-T5-29
Dimensions	V8-T5-30

THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.

For the most current information on this product, visit our website: www.eaton.com/sensors

For Customer Service in the U.S. call 915-401-8307, in Canada call 1-800-268-3578. For Application Assistance in the U.S. and Canada call 1-877-ETN CARE (386-2273).

Product Selection Guide

Connection Options

Cable Version



5



Mini QD (Body)

Micro or Euro (Micro) QD (Body)



Micro or Euro (Micro) QD (Pigtail)



Product Selection

Thru-Beam Sensors

Field of View: 2.4°

Voltage Range	Sensing Range	Optimum Range	Sensing Beam	Thru-Beam Component	Output Type	Time Delay	Connection Type	Catalog Number									
10–40 Vdc	200 ft	0.1 to 100 ft	Infrared	Source	N/A	N/A	6 ft cable	1150E-6517									
	(61 m)	(0.03 to 31 m)		Detector	NPN/PNP 250 mA	no		1250E-6517									
						yes		1250E-8517									
				Source	N/A	N/A	4-pin Euro (micro)	1150E-6547 😮									
				Detector	NPN/PNP 250 mA	no	connector	1250E-6547 🙁									
						yes		1250E-8547 🙁									
				Source	N/A	N/A	4-pin Euro (micro)	1150E-6537 🙁									
				Detector	NPN/PNP 250 mA	no	connector (pigtail)	1250E-6537 🙁									
						yes		1250E-8537 🙁									
			Source	N/A	N/A	4-pin mini-	1150E-6507 🙂										
				Detector	NPN/PNP 250 mA	no	connector	1250E-6507 🕄									
						yes		1250E-8507 🏽									
12-240 Vdc	200 ft	0.1 to 100 ft (0.03 to 31 m)	Infrared	Source	N/A	N/A	6 ft cable	1150E-6513									
24–240 Vac	(61 m)			Detector	Isolated output	no		1250E-6513									
					solid-state relay 300 mA at 240 Vac/dc	yes		1250E-8513									
					SPDT EM relay	no		1250E-6514									
					3A at 120 Vac	yes		1250E-8514									
				Source	N/A	N/A	4-pin micro-	1150E-6543 🙁									
				Detector	Isolated output	no	connector	1250E-6543 🙁									
					solid-state relay 300 mA at 240 Vac/dc	yes		1250E-8543 😮									
				Source	N/A	N/A	4-pin micro-	1150E-6534 🙁									
				Detector	Isolated output	no	connector (pigtail)	1250E-6533 🕃									
					solid-state relay 300 mA at 240 Vac/dc	yes		1250E-8533 🕲									
					SPDT EM relay	no	5-pin micro-	1250E-6534 🕄									
					3A at 120 Vac	yes	connector (pigtail)	1250E-8534 🕄									
												Source	Source	rce N/A	N/A	4-pin mini-	1150E-6504 🕲
				Detector	Isolated output	no	connector	1250E-6503 🙁									
					solid-state relay 300 mA at 240 Vac/dc	yes	_	1250E-8503 🙂									
					SPDT EM relay	no	5-pin mini-	1250E-6504 😯									
					3A at 120 Vac	yes	connector	1250E-8504 🕄									

Notes

: See listing of compatible connector cables on Page V8-T5-25.

1 For a complete system, order one sensor and one detector.

(2) For brackets compatible with these sensors, see Accessories on Page V8-T5-27.

Enhanced 50 Series Sensors

ew. 2.4			•							
7	Voltage Range	Sensing Range	Optimum Range	Sensing Beam	Thru-Beam Component	Output Type	Time Delay	Connection Type	Catalog Numbe	
	10–40 Vdc	500 ft	0.1 to 250 ft	Infrared	Source	N/A	N/A	6 ft cable	1151E-6517	
		(152 m)	(0.03 to 77 m)		Detector	NPN/PNP 250 mA	no		1251E-6517	
							yes		1251E-8517	
					Source	N/A	N/A	4-pin Euro (micro)	1151E-6547 🙁	
					Detector	NPN/PNP 250 mA	no	connector	1251E-6547 🙂	
							yes		1251E-8547 😮	
					Source	N/A	N/A	4-pin Euro (micro)	1151E-6537 🙁	
					Detector	NPN/PNP 250 mA	no	connector (pigtail)	1251E-6537 🙁	
							yes		1251E-8537 😮	
					Source	N/A	N/A	4-pin mini-	1151E-6507 🙁	
					Detector	NPN/PNP 250 mA	no	connector	1251E-6507 😮	
							yes	6 ft cable	1251E-8507 🕲	
	12-240 Vdc	500 ft	0.1 to 250 ft	Infrared	Source	N/A	N/A		1151E-6513	
	24–240 Vac	(152 m)	(0.03 to 77 m)		Detector	Isolated output	no		1251E-6513	
						solid-state relay 300 mA at 240 Vac/dc	yes		1251E-8513	
						SPDT EM relay	no		1251E-6514	
						3A at 120 Vac	yes		1251E-8514	
					Source	N/A	N/A	4-pin micro-	1151E-6543 😮	
					Detector	Isolated output	no	connector	1251E-6543 🕄	
						solid-state relay 300 mA at 240 Vac/dc	yes		1251E-8543 🕄	
						Source	N/A	N/A	4-pin micro-	1151E-6534 😮
					Detector	Isolated output	no	connector (pigtail)	1251E-6533 😮	
						solid-state relay 300 mA at 240 Vac/dc	yes		1251E-8533 🙁	
						SPDT EM relay	no	5-pin micro-	1251E-6534 🕄	
						3A at 120 Vac	yes	connector (pigtail)	1251E-8534 🕄	
					Source	N/A	N/A	4-pin mini-	1151E-6504 😮	
					Detector	Isolated output	no	connector	1251E-6503 🕄	
						solid-state relay 300 mA at 240 Vac/dc	yes	_	1251E-8503 🙁	
						SPDT EM relay	no	5-pin mini-	1251E-6504 🕄	
						3A at 120 Vac	yes	connector	1251E-8504 😯	

Notes

: See listing of compatible connector cables on Page V8-T5-25.

^① For a complete system, order one sensor and one detector.

⁽²⁾ For brackets compatible with these sensors, see Accessories on Page V8-T5-27.

5.2

Standard Reflex 12

Reflex Sensors

Field of View: 1.0°

Voltage Range	Sensing Range ³	Optimum Range ⁽³⁾	Sensing Beam	Output Type	Time Delay	Connection Type	Catalog Number
10–40 Vdc	30 ft (9 m)	0.5 to 15 ft	Visible red	NPN/PNP 250 mA	no	6 ft cable	1450E-6517
		(0.2 to 4.6 m)			yes		1450E-8517
					no	4-pin Euro (micro)	1450E-6547 😮
					yes	connector	1450E-8547 🏽
					no	4-pin Euro (micro)	1450E-6537 😮
					yes	connector (pigtail)	1450E-8537 😮
					no	4-pin mini-connector	1450E-6507 🕃
					yes		1450E-8507 😮
12–240 Vdc	30 ft (9 m)	0.5 to 15 ft	Visible red	Isolated output	no	6 ft cable	1450E-6513
24–240 Vac		(0.2 to 4.6 m)		solid-state relay 300 mA at 240 Vac/dc	yes		1450E-8513
					no	4-pin micro-connector	1450E-6543 🕄
					yes		1450E-8543 🕄
					no	4-pin micro-	1450E-6533 🏽
					yes	connector (pigtail)	1450E-8533 🕄
					no	4-pin mini-connector	1450E-6503 🕄
					yes		1450E-8503 🕃
				SPDT EM relay	no	6 ft cable	1450E-6514
				3A at 120 Vac	yes		1450E-8514
					no	5-pin micro-	1450E-6534 😯
					yes	connector (pigtail)	1450E-8534 😯
					no	5-pin mini-connector	1450E-6504 😯
					yes		1450E-8504 😯

Notes

 $\textcircled{\begin{tince} \textcircled{\begin{tince} \begin{tince} \hline \hline \begin{tince} \hline$

 $^{\odot}\,$ For a complete system, order one sensor and one retroreflector (see Tab 8, section 8.1).

⁽²⁾ For brackets compatible with these sensors, see Accessories on Page V8-T5-27.

 $\ensuremath{^{\textcircled{3}}}$ Ranges based on 3 in retroreflector for reflex sensors.

Voltage Range	Sensing Range ④	Optimum Range ④	Sensing Beam	Output Type	Time Delay	Connection Type	Catalog Numbe
10–40 Vdc	16 ft (4.9 m)	0.5 to 8 ft	Visible red	NPN/PNP 250 mA	no	6 ft cable	1451E-6517
		(0.2 to 2.5 m)			yes		1451E-8517
					no	4-pin Euro (micro)	1451E-6547 😮
					yes	connector	1451E-8547 🙁
					no	4-pin Euro (micro)	1451E-6537 🕄
					yes	connector (pigtail)	1451E-8537 😮
					no	4-pin mini-connector	1451E-6507 🙁
					yes		1451E-8507 😮
12-240 Vdc	16 ft (4.9 m)	0.5 to 8 ft	Visible red	Isolated output	no	6 ft cable	1451E-6513
24–240 Vac		(0.2 to 2.5 m)		solid-state relay 300 mA at 240 Vac/dc	yes		1451E-8513
					no	4-pin micro-connector	1451E-6543 🕃
					yes		1451E-8543 🕲
					no	4-pin micro-	1451E-6533 🕄
					yes	connector (pigtail)	1451E-8533 😮
					no	4-pin mini-connector	1451E-6503 🙂
					yes		1451E-8503 🕃
				SPDT EM relay	no	6 ft cable	1451E-6514
				3A at 120 Vac	yes		1451E-8514
					no	5-pin micro-	1451E-6534 😯
					yes	connector (pigtail)	1451E-8534 😯
					no	5-pin mini-connector	1451E-6504 😯
					yes		1451E-8504 😯

Notes

Polarized Reflex 123

: See listing of compatible connector cables on Page V8-T5-25.

^① For a complete system, order one sensor and one retroreflector (see **Tab 8**, **section 8.1**).

⁽²⁾ Polarized sensors may not operate with reflective tape. Test tape selection before installation.

^③ For brackets compatible with these sensors, see Accessories on **Page V8-T5-27**.

④ Ranges based on 3 in retroreflector for reflex sensors.

Field of View: 1.0°

Diffuse Reflective ①

Diffuse Sensors

Field of View: 2.8°

Voltage Range	Sensing Range [©]	Optimum Range [@]	Sensing Beam	Output Type	Time Delay	Connection Type	Catalog Number
10–40 Vdc	5 ft (1.5 m)	1 to 30 in	Infrared	NPN/PNP 250 mA	no	6 ft cable	1350E-6517
		(25 to 760 mm)			yes		1350E-8517
					no	4-pin Euro (micro)	1350E-6547 🙁
					yes	connector	1350E-8547 🏽
					no	4-pin Euro (micro)	1350E-6537 🕄
					yes	connector (pigtail)	1350E-8537 🕄
					no	4-pin mini-connector	1350E-6507 🏽
					yes		1350E-8507 選
12–240 Vdc	5 ft (1.5 m)	1 to 30 in	Infrared	Isolated output	no 6 ft cable	6 ft cable	1350E-6513
24–240 Vac		(25 to 760 mm)		solid-state relay 300 mA at 240 Vac/dc	yes		1350E-8513
					no	4-pin micro-connector	1350E-6543 🕄
					yes		1350E-8543 🏽
					no	4-pin micro-	1350E-6533 🏵
					yes	connector (pigtail)	1350E-8533 🏽
					no	4-pin mini-connector	1350E-6503 🕄
					yes		1350E-8503 🕃
				SPDT EM relay	no	6 ft cable	1350E-6514
				3A at 120 Vac	yes		1350E-8514
					no	5-pin micro-	1350E-6534 😯
					yes	connector (pigtail)	1350E-8534 😯
					no	5-pin mini-connector	1350E-6504 😯
					yes		1350E-8504 😯

Notes

(1) See listing of compatible connector cables on Page V8-T5-25.

0 For brackets compatible with these sensors, see Accessories on Page V8-T5-27.

 $^{\scriptsize (2)}$ Ranges based on 90% reflectance white card for diffuse reflective sensors.

5.2

Voltage Range	Sensing Range ⁽²⁾	Optimum Range [©]	Sensing Beam	Output Type	Time Delay	Connection Type	Catalog Number
10–40 Vdc	10 ft (3 m)	1 to 60 in	Infrared	NPN/PNP 250 mA	no	6 ft cable	1351E-6517
		(25 to 1520 mm)			yes		1351E-8517
					no	4-pin Euro (micro)	1351E-6547 🙁
					yes	connector	1351E-8547 🙁
					no	4-pin Euro (micro)	1351E-6537 🕄
					yes	connector (pigtail)	1351E-8537 🙁
					no	4-pin mini-connector	1351E-6507 🏽
					yes		1351E-8507 🏽
12–240 Vdc	10 ft (3 m)	1 to 60 in	Infrared	Isolated output	no	6 ft cable	1351E-6513
24–240 Vac		(25 to 1520 mm)		solid-state relay 300 mA at 240 Vac/dc	yes	4-pin micro-connector	1351E-8513
				····	no		1351E-6543 🏽
					yes		1351E-8543 🙁
					no	4-pin micro-	1351E-6533 🏽
					yes	connector (pigtail)	1351E-8533 🏽
					no	4-pin mini-connector	1351E-6503 🏽
					yes		1351E-8503 🕄
				SPDT EM relay	no	6 ft cable	1351E-6514
				3A at 120 Vac	yes		1351E-8514
					no	5-pin micro-	1351E-6534 😯
					yes	connector (pigtail)	1351E-8534 😯
					no	5-pin mini-connector	1351E-6504 😯
					yes		1351E-8504 😯

Field of View: 2.8° Diffuse Reflective Extended Range ①

Notes

: See listing of compatible connector cables on Page V8-T5-25.

① For brackets compatible with these sensors, see Accessories on Page V8-T5-27.

⁽²⁾ Ranges based on 90% reflectance white card for diffuse reflective sensors.

Clear Object Detector 02

Clear Object Sensors



Voltage Range	Sensing Range	Optimum Range	Sensing Beam	Output Type	Time Delay	Connection Type	Catalog Number
10–40 Vdc	45 in (1.2 m)	1 to 24 in	Visible red	NPN/PNP 250 mA	no	6 ft cable	1452E-6517
		(25 to 610 mm)			yes		1452E-8517
				no	4-pin Euro (micro)	1452E-6547 🕄	
					yes	connector	1452E-8547 🕃
					no	4-pin Euro (micro)	1452E-6537 🕄
					yes	connector (pigtail) 4-pin mini-connector	1452E-8537 🕄
					no		1452E-6507 🏽
					yes		1452E-8507 🕄
12-240 Vdc	45 in (1.2 m)	1 to 24 in	Visible red	Isolated output	no	6 ft cable	1452E-6513
24–240 Vac		(25 to 610 mm)	n)	solid-state relay 300 mA at 240 Vac/dc	yes		1452E-8513
					no	4-pin micro-connector	1452E-6543 🕄
					yes	4-pin micro-	1452E-8543 🕄
					no		1452E-6533 🏽
					yes	connector (pigtail)	1452E-8533 🕄
					no	4-pin mini-connector	1452E-6503 🕄
					yes		1452E-8503 🏽
				SPDT EM relay	no	6 ft cable	1452E-6514
				3A at 120 Vac	yes		1452E-8514
					no	5-pin micro-	1452E-6534 😯
					yes	connector (pigtail)	1452E-8534 😯
					no	5-pin mini-connector	1452E-6504 😯
					yes		1452E-8504 🕄

Notes

(1) See listing of compatible connector cables on Pages V8-T5-25 and V8-T5-26.

^① For a complete system, order one sensor and one retroreflector (see **Tab 8**, **section 8.1**).

⁽²⁾ For brackets compatible with these sensors, see Accessories on Page V8-T5-27.

Fiber Optic Sensors

Field of View: 234	Fiber	Optic	Inf	rared 1
			-	

Voltage Range	Sensing Range	Optimum Range	Sensing Beam	Output Type	Time Delay	Connection Type	Catalog Number
10–40 Vdc	Depends on fiber		Infrared	NPN/PNP 250 mA	no	6 ft cable	1550E-6517
	selected ⁽⁵⁾	selected			yes		1550E-8517
					no	4-pin Euro (micro)	1550E-6547 🙂
					yes	connector	1550E-8547 🙂
					no	4-pin Euro (micro)	1550E-6537 🙂
					yes	connector (pigtail)	1550E-8537 🙂
					no	4-pin mini-connector	1550E-6507 🙂
					yes		1550E-8507 🙂
12–240 Vdc		Depends on fiber	Infrared	Isolated output	no	6 ft cable	1550E-6513
24–240 Vac	selected ⁽⁵⁾	selected		solid-state relay 300 mA at 240 Vac/dc	yes		1550E-8513
					no	4-pin micro-connector	1550E-6543 🙂
					yes		1550E-8543 🙂
					no	4-pin micro-	1550E-6533 🕃
					yes	connector (pigtail)	1550E-8533 🕄
					no	4-pin mini-connector	1550E-6503 🕃
					yes		1550E-8503 🕃
				SPDT EM relay	no	6 ft cable	1550E-6514
				3A at 120 Vac	yes		1550E-8514
					no	5-pin micro-	1550E-6534 🕄
					yes	connector (pigtail) 5-pin mini-connector	1550E-8534 😯
					no		1550E-6504 😯
					yes		1550E-8504 😯

Notes

(I) See listing of compatible connector cables on Pages V8-T5-25 and V8-T5-26.

 $^{\odot}\,$ For brackets compatible with these sensors, see Accessories on Page V8-T5-27.

Field of view depends on fiber selected.

⁽³⁾ For a complete system, order one sensor and one fiber optic cable (see Pages V8-T5-25 and V8-T5-26).

Infrared fiber optic sensors are compatible with glass fiber optic cables (E51KE_).

⁽⁶⁾ Diffuse mode—up to 6 in (152 mm); thru-beam—up to 35 in (890 mm).

5

Field of View: 234

Fiber Optic Visible ①



Voltage Range	Sensing Range	Optimum Range	Sensing Beam	Output Type	Time Delay	Connection Type	Catalog Numbe
10–40 Vdc	Depends on fiber		Infrared	NPN/PNP 250 mA	no	6 ft cable	1551E-6517
	selected (5)	selected			yes		1551E-8517
					no	4-pin Euro (micro)	1551E-6547 🏽
					yes	connector	1551E-8547 🙁
					no	4-pin Euro (micro)	1551E-6537 🙁
					yes	connector (pigtail)	1551E-8537 🏽
					no	4-pin mini-connector	1551E-6507 🙂
					yes		1551E-8507 🙂
2–240 Vdc	Depends on fiber		ed si	frared Isolated output solid-state relay 300 mA at 240 Vac/dc	no	6 ft cable	1551E-6513
24–240 Vac	selected (5)	selected			yes		1551E-8513
					no	4-pin micro-connector 4-pin micro- connector (pigtail)	1551E-6543 🙁
					yes		1551E-8543 🏽
					no		1551E-6533 🕄
					yes		1551E-8533 🙁
					no	4-pin mini-connector	1551E-6503 🏽
					yes		1551E-8503 🙁
				SPDT EM relay	no	6 ft cable	1551E-6514
				3A at 120 Vac	yes		1551E-8514
					no	5-pin micro-	1551E-6534 😯
					yes	connector (pigtail)	1551E-8534 😯
					no	5-pin mini-connector	1551E-6504 🕄

yes

1551E-8504 😯

Notes

: See listing of compatible connector cables on Page V8-T5-25.

 $^{\scriptsize (1)}$ For brackets compatible with these sensors, see Accessories on Page V8-T5-27.

 $\ensuremath{\textcircled{}^\circ}$ Field of view depends on fiber selected.

⁽³⁾ For a complete system, order one sensor and one fiber optic cable (see Page V8-T5-26).

(Visible fiber optic sensors are compatible with plastic fiber optic cables only.

[©] Diffuse mode—up to 3 in (76 mm); thru-beam—up to 35 in (890 mm).

Compatible Connector Cables



				Pin Configuration/			
Voltage Style	Number of Pins	Gauge	Length	Wire Colors (Face View Female Shown)	PVC Jacket Catalog Number	PUR Jacket Catalog Number	IRR PUR Jacket Catalog Number
Micro-Sty	le, Straight F	emale					
AC Micro	4-pin, 4-wire	22 AWG	6 ft (2 m)	1-Red/Black 2-Red/White 3-Red 4-Green	CSAS4F4CY2202	CSAS4F4RY2202	CSAS4F4102202
	5-pin, 5-wire	22 AWG	6 ft (2 m)	(5) (1) (4) (2) (4) (3) (2) (3) (2) (3) (3) (3) (3) (3) (3) (3) (3) (3) (3	CSAS5A5CY2202	_	_
DC	4-pin, 4-wire	22 AWG	6 ft (2 m)	1-Brown 2-White 3-Blue 4-Black	CSDS4A4CY2202	CSDS4A4RY2202	CSDS4A4102202

Mini-Style, Straight Female



Standard Cables – Mini ^①

Current Rating at 600V	Voltage Style	Number of Pins	Gauge	Length	Pin Configuration/ Wire Colors (Face View Female Shown)	Catalog Number
Mini-Sty	le, Straigh	t Female				
8A	AC/DC	4-pin, 4-wire	16 AWG	6 ft (2 m)	(4) (1) (3) (2) 1-Black 2-Blue 3-Brown 4-White	CSMS4A4CY1602
		5-pin, 5-wire	16 AWG	6 ft (2 m)	(5 (1) (4)(2) (3) (2) (3) (2) (2) (2) (2) (2) (2) (2) (2) (2) (2	CSMS5A5CY1602

Note

^① For a full selection of connector cables, see **Tab 10**, **section 10.1**.

Fiber Optic Cables

Glass Fiber Optic	: Cables					
	Glass Fibe (for Diffuse					
Sensing Tip Style	Fiber Bundle Size A in In (mm)	Stainless Steel Jacket Catalog Number	PVC/Monocoil Jacket Catalog Number	Sensing Tip Style		
Forward Viewing, Unthreaded	Forward View	ving, Unthreaded		Forward Viewing, Unthreaded		
Unthreaded	0.125 (3.2)	E51KE713	E51KE313	Untireaded		
Right Angle Viewing,	Right Angle \	/iewing, Unthread	ed	Right Angle Viewing,		
Unthreaded	0.125 (3.2)	E51KE733	E51KE333	Unthreaded		
Forward Viewing, Threaded Cable End	Forward View	Forward Viewing, Threaded Cable End				
Threaded Cable Ellu	0.125 (3.2)	E51KE723	E51KE323			
- Demm				and a second		
Right Angle Viewing,	Right Angle \	/iewing, Threaded	Right Angle Viewing,			
Threaded Cable Shaft	0.125 (3.2)	E51KE7A3	E51KE3A3	Threaded Cable Shaft		
				C C C C C C C C C C C C C C C C C C C		
Right Angle Viewing,	Right Angle \	/iewing, Threaded	Cable End	Right Angle Viewing, Threaded Cable End		
Threaded Cable End	0.125 (3.2)	E51KE7B3	E51KE3B3			
Contraction				Annanan		
17.00				17.13		

Dimensions, see Page V8-T5-31.

Glass Fiber Optic Cables-Single Cables (for Thru-Beam Sensing) **Fiber Bundle** Stainless Steel **PVC/Monocoil** Size A in In (mm) Jacket Catalog Number Jacket Catalog Number Forward Viewing, Unthreaded

0.125 (3.2) E51KE813 E51KE413 Viewing, **Right Angle Viewing, Unthreaded** 0.125 (3.2) E51KE833 E51KE433 wing, Ible End Forward Viewing, Threaded Cable End E51KE823 0.125 (3.2) E51KE423 paut Viewing, ble Shaft **Right Angle Viewing, Threaded Cable Shaft** E51KE8A3 0.125 (3.2) E51KE4A3

Viewing, ble Enď ssii Right Angle Viewing, Threaded Cable End E51KE8B3 E51KE4B3

Dimensions, see Page V8-T5-31

0.125 (3.2)

Plastic Fiber Optic Cables

		Optic Cables— d Duplex Cables			Plastic Fiber Optic Cables— Pre-Assembled Single Cables	
Sensing Tip Style	Fiber Diameter in In (mm)	Catalog Number	Sensing Tip Style	Fiber Diameter in In (mm)	Catalog Number	
Large Diameter,	Large Diameter,	Large Diameter, Threaded Tip		Large Diameter, Threaded Tip		
Threaded Tip	0.059 (1.5)	6324E-6501 ⁽¹⁾ 2	Threaded Tip	0.059 (1.5)	6323E-6501 ⁽¹⁾ 3	
Large Diameter,	Large Diameter,	Large Diameter, Threaded Tip with Bendable Probe				
Threaded Tip with Bendable Probe	0.039 (1.0)	6324E-6502 [©]	Threaded Tip with Bendable Probe	0.039 (1.0)	6323E-6502 3	
	-			-		
C.	Dimensions, see	Dimensions, see Page V8-T5-31.		Dimensions, see	, see Page V8-T5-31 .	
	Notes ① Larger diameter (1	.5 mm) fibers provide approximately 50% longer	sensing range than small dia	ameter (1 mm).		

^② One cable.

③ Set of two.

Accessories

	Enhanced 50 Series Sensors					
	Description	Catalog Number				
Mounting Bracket	 Mounting Bracket Right Angle—Short					
Right Angle—Short	Provides for full 360° rotation of sensor. Bracket slots allow for up to 1.5 in of vertical adjustment. Nickel plated	6150E-6501				
Mounting Bracket	Mounting Bracket Right Angle—Tall					
Right Angle—Tall	Provides for full 360° rotation of sensor. Bracket slots allow for up to 1.5 in of vertical adjustment in each slot, and 3.5 in of overall positioning adjustment.	6150E-6502				
Mounting Bracket	Mounting Bracket Right Angle—Ball Swivel					
Right Angle— Ball Swivel	Provides for full 360° rotation of sensor. Ball swivel allows for $\pm 30^\circ$ sensor angle.	6150E-6503				
	Retroreflectors					
	Retroreflectors and retroreflective tape, see Tab 8, section 8.1	_				
	Connector Cables					
	For use with connector version sensors, see Tab 10, section 10.1	_				

Dimensions, see Page V8-T5-31.

Technical Data and Specifications

Enhanced 50 Series Sensors


Description	AC/DC EM Relay Model Specification	AC/DC Solid-state Relay Model Specification	DC Only Standard Range Model Specification	DC Only Extended Range Model Specification
Input voltage	12–240 Vdc; 24–240 Vac	12–240 Vdc; 24–240 Vac	10-40 Vdc	10-40 Vdc
Light/dark operation	Switch selectable	Switch selectable	Switch selectable	Switch selectable
Operating temperature	–13 to 131 °F (–25 to 55 °C)	–13 to 131 °F (–25 to 55 °C)	–13 to 131 °F (–25 to 55 °C)	–13 to 131 °F (–25 to 55 °C)
Humidity	95% Relative humidity, non-condensing	95% Relative humidity, non-condensing	95% Relative humidity, non-condensing	95% Relative humidity, non-condensing
Case material	Fiberglass reinforced plastic	Fiberglass reinforced plastic	Fiberglass reinforced plastic	Fiberglass reinforced plastic
Lens material	Acrylic	Acrylic	Acrylic	Acrylic
Vibration	IEC 60947-5-2 part 7.4.2	IEC 60947-5-2 part 7.4.2	IEC 60947-5-2 part 7.4.2	IEC 60947-5-2 part 7.4.2
Shock	IEC 60947-5-2 part 7.4.1	IEC 60947-5-2 part 7.4.1	IEC 60947-5-2 part 7.4.1	IEC 60947-5-2 part 7.4.1
Protection	-	Output short circuit and overcurrent protection Reverse polarity protection	Output short circuit and overcurrent protection Reverse polarity protection	Output short circuit and overcurrent protection Reverse polarity protection
Enclosure ratings	IP67, IP69	IP67, IP69	IP67, IP69	IP67, IP69
Output load	3 A at 120 Vac; 3 A at 240 Vac 3 A at 28 Vac	300 mA at 240 Vac/Vdc	250 mA at 40 Vdc	250 mA at 40 Vdc
Response time	15 ms	2 ms	2 ms	2 ms
Timer timing response	0–15 sec	0–15 sec	0–15 sec	0–15 sec
No load current	<30 mA	<30 mA	<30 mA	<30 mA
Leakage current (max.)	_	1 mA at 240 Vac	<10 µA	<10 µA
Indicator LEDs	Green: output; yellow: power; red: alignment	Green: output; yellow: power; red: alignment	Green: output; yellow: power; red: alignment	Green: output; yellow: power; red: alignment
Emitter LED				
Diffuse, infrared fiber optic, thru-beam models	Infrared 880 mm	Infrared 880 mm	Infrared 880 mm	Infrared 880 mm
Reflex, polarized reflex, clear object, visible fiber optic units	Visible red 660 mm	Visible red 660 mm	Visible red 660 mm	Visible red 660 mm

Enhanced 50 Series Sensors

Excess Gain




5






Diffuse Reflective



Diffuse reflective 90% reflectance white card 1. 1351E 2. 1350E


Reflex



Reflex 3 in retroreflector 1. 1450E


2. 1451E

Clear Object Detector




Clear object detector 3 in retroreflector 1. 1452E

Fiber Optic Diffuse



Fiber optic diffuse	
0.125 in dia. glass fiber	0.040 in dia. plastic fiber
1. 1550E	2. 1551E

Fiber Optic Thru-Beam



Fiber optic thru-beam 0.125 in dia. glass fiber 1. 1550E

0.040 in dia. plastic fiber 2. 1551E

V8-T5-28

Wiring Diagrams

Pin numbers are for reference, rely on pin location when wiring.

Enhanced 50 Series Sensors

Operating Voltage	Cable Model	Mini-Connector Model (Face View Male Shown)	Micro-Connector Model (Face View Male Shown)
Thru-Beam Source			
10-40 Vdc	BR (+) ⁽¹⁾ BK BU BU (-) OV	(+) (3) (2) (4) (1) Test In	(+) (4) (1) (2) (+) (-) OV
All Others			
10-40 Vdc	BN WH Load BK Load BU PNP (-) OV	(+) (+) (+) (+) (-) OV	(+) (+) (+) (+) (+) (+) (+) (+)
Thru-Beam Source			
12-240 Vdc or 24-240 Vac	BR L1 (+) BU L2 (-)	(3) (2) (4) (1) (2) (-)	(1) (2) L2 (-)
All Others with Isolate	ed AC/DC Output		
12–240 Vdc or 24–240 Vac	BR L1 (+) ⁽³⁾ WH Isolated BK AC/DC Output BU L2 (-)	L1 (+) (3) (2) (2) (3) (3) (3) (4) (1) Isolated AC/DC Output	Isolated AC/DC Output (3) (1) L2 (-) (3) L1 (+)
Thru-Beam Source			
12–240 Vdc or 24–240 Vac	BR L1 (+) BU L2 (-)	L1 (+) (3) (2) (4) (1) L2 (-)	L1 (+) (1) (2) L2 (-)
All Others			
12–240 Vdc or 24–240 Vac SPDT EM relay ®	BR L1 (+) OR COM WH N.C. BK N.O. BU L2 (-)	4 ³ 2 5 1 N.O. N.C. L2 (-)	L2 (-) COM (4) 3(2) L1 (+) N.O. N.C.

Notes

① Connecting the test input to 0 Vdc allows you to switch the light source off for troubleshooting while leaving the sensor under power.

- ⁽²⁾ Over current protection is to be provided in the field. Conductor size for 20 AWG: 5 amp; 22 AWG: 3 amp; 24 AWG: 2 amp.
- ⁽³⁾ Connect load to appropriate output for either sinking or sourcing operation.

Enhanced 50 Series Sensors


Dimensions

5


Approximate dimensions in inches (mm)

Enhanced 50 Series Sensors

Cable and Pigtail Connector Versions

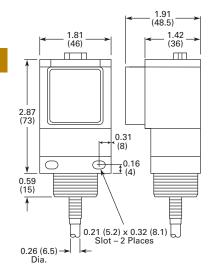


Clear Object Versions

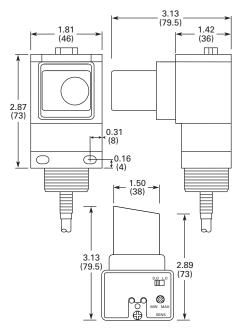


Top Views


With **Timing**








Mini-Connector Versions

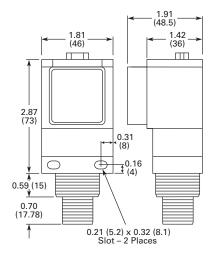

AC/DC Micro or Euro (Micro) Connector Versions

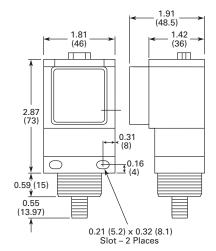


V8-T5-30









Enhanced 50 Series Sensors

Approximate dimensions in inches (mm)


Glass Fiber Optic Cables—Duplex Cables

Stainless Steel Jacket shown for all.


Collar Mounting End




Forward Viewing, Unthreaded

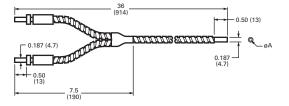


Right Angle Viewing, Unthreaded

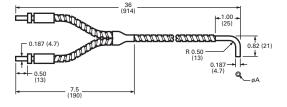


Forward Viewing, Threaded Cable End

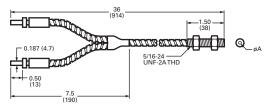

Right Angle Viewing, Threaded Cable Shaft

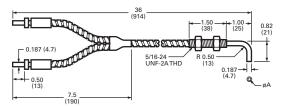

Right Angle Viewing, Threaded Cable End

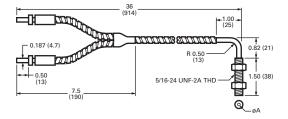


Glass Fiber Optic Cables—Single Cables

Stainless Steel Jacket shown for all.






Forward Viewing, Unthreaded








Right Angle Viewing, Threaded Cable Shaft







Approximate dimensions in inches (mm)

Plastic Fiber Optic Cables—Pre-Assembled Duplex Cables

Large Diameter, Threaded Tip




Large Diameter, Threaded Tip with Bendable Probe




Plastic Fiber Optic Cables—Pre-Assembled Single Cables

Large Diameter, Threaded Tip




Large Diameter, Threaded Tip with Bendable Probe




Accessories


Mounting Bracket Right Angle-Short



Mounting Bracket Right Angle-Tall



Mounting Bracket Right Angle-Ball Swivel

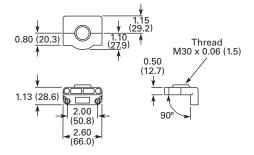

Contents

Description

IntelliView Series Sensors Product Selection

IntelliView Series Sensors

Foreground/Background Sensing

Distance Sensing Color, Contrast and Luminescence Sensing

Compatible Connector Cables

Detection Diagrams

Page

V8-T5-34 V8-T5-35

V8-T5-37

V8-T5-38

V8-T5-38

V8-T5-39

V8-T5-42 V8-T5-43

V8-T5-44

IntelliView Series Sensors



IntelliView Series Sensors

Product Description

The IntelliView Series from Eaton is a family of compact, high performance specialty photoelectric sensors designed to solve a wide array of sensing challenges.

IntelliView encompasses a variety of new sensing technologies: color, contrast and luminescence sensing; field-adjustable foreground and background suppression sensing; and long-range, high-precision laser distance sensing with analog outputs.

To fit into your application, IntelliView sensors are available in industry-standard M18 flat-tubular and compact rectangular package sizes. For ease of installation and replacement, all models are available with microconnectors.

Features

- New sensing technologies—Eaton has solutions for sensing color, contrast, luminescence and distance with great accuracy
- Small size, big solutions— IntelliView sensors come in either compact rectangular or flat-tubular package sizes, with rugged sealed enclosures
- Simple "teach in" installation—Most models include a teach mode, allowing for quick and simple installation and setup
- Adjustable background suppression—Eaton offers a fully field-adjustable background suppression photoelectric sensor capable of detecting targets as far as 3.9 ft (1.9 m) away
- LED indicators and pushbuttons—Multiple LEDs communicate output and power status while built-in pushbuttons and adjustment potentiometers simplify the teaching of sensor settings

Standards and CertificationsUL Listed. E166051

- UL tested to Canadian
- Safety standards
 CF
- CE

RoHS compliant



DANGER

THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.

For the most current information on this product, visit our website www.eaton.com/sensors For Customer Service in the U.S. call 915-401-8307, in Canada call 1-800-268-3578. For Application Assistance in the U.S. and Canada call 1-877-ETN CARE (386-2273).

IntelliView Series Sensors

Product Selection

Overview—Foreground/Background Sensing



Adjustable Foreground/Background Suppression Models

- Ignores nuisance foreground or background objects
- Compact 50x50 mm rectangular package size
- Field-adjustable sensing ranges
- M12 micro-connector termination with 90- and 180-degree rotation options
- Sensing ranges up to 47.2 in (120 cm)

Foreground/Background Sensing Basics

Foreground/background suppression sensors allow the user to precisely set the minimum and maximum detection distance. This allows detection of a target only when it is inside a given area, avoiding the interference of objects lying before (foreground) and behind (background). This type of sensor is ideal for suppressing the detection of box edges and bottoms, sending an output only upon the presence of goods actually contained in the box.

Foreground/Background Sensing

Adjustable Foreground/Background Suppression

Voltage Range	Output Type	Connection	Adjustable Sensing Range	Catalog Number
tangular Background S	uppression Models			
10-30 Vdc	Light operate or dark operate (selectable), PNP	4-pin micro- connector ^①	3–10 cm (1.2–4.0 in)	E75-PPA010P-M12 @
			3–25 cm (1.2–9.8 in)	E75-PPA025P-M12
			10–50 cm (4.0–19.7 in)	E75-PPA050P-M12
gular Extended Ran	ge Background Sup	pression Mode	ls	
10–30 Vdc	Light operate or dark operate (selectable), PNP		6–120 cm (2.4–47.2 in)	E75-PP1MP-M12
lar Foreground/B	ackground Suppres	sion Models		
10–30 Vdc	Light operate or dark operate (selectable), PNP		Foreground: 5–20 cm (2.0–7.9 in) Background: 12–110 cm (4.7–43.3 in)	E75-PPA110P-M12

⁽¹⁾ For compatible connector cables, see Page V8-T5-38.

⁽²⁾ Range not adjustable.

Overview—Distance Sensing Models with Analog Outputs



Long-Range, High-Precision Laser Distance Measurement Sensor

Distance Sensing Models with Analog Outputs

- When within the effective range of the sensor, outputs a 0–10V signal proportional to the target's distance from the sensor face
- Class II laser emitter detects objects from 0.3 to 4m (1 to 13.1 ft) away
- Two additional PNP outputs can be programmed to switch at predetermined ranges
- Simple three-step teach routine to program range cutoffs
- Unmatched accuracy and resolution at long sensing distances
- When within the effective range of the sensor, outputs a 0–10V signal proportional to the target's distance from the sensor face
- Visible red LED emitter detects objects from 5 to 10 cm (1.9 to 3.9 in)
- Two indicator LEDs communicate sensor status: a yellow LED with light intensity proportional to the target's distance within the sensor's range, and a red LED that activates when the target is beyond maximum sensing range
- Flat tubular package can be mounted using the body threads or flat against a surface

Distance Sensing Explained

Distance sensors output a 0–10V analog signal in proportion to the measurement of the distance between the sensor and target. Optical triangulation, a technology similar to that used in Eaton's PerfectProx or diffuse sensors, is used for short- to mid-range distance sensing applications that do not require a high degree of accuracy. Time-of-flight technology, a method of measuring the time it takes for the emitted beam to bounce off the target and return to the detector, is used for longer range distance sensing applications. Time-of-flight is highly accurate with precise resolution over long sensing distances.

Distance Sensing

Re (8)

Distance Sensing Models with Analog Outputs

	Voltage Range	Output Type	Connection	Adjustable Sensing Range	Catalog Number
ctangular	Long-Rang	ge Laser Distance Sensor	with Time-of-F	light Technology	
80 x 53 x 31 mm)	19–28 Vdc	Analog output (0–10V), dual teachable PNP outputs, Light operate mode	5-pin micro- connector ①	0.3–4.0m (1.0–13.1 ft)	E75-DST400A010-M12 @

Notes

① For compatible connector cables, see Page V8-T5-38.

② This sensor is a Class II laser device. Eye irradiation for over 0.25 seconds is dangerous. Refer to the Class II Standard (EN60825-1) for additional safety information.

Overview—Color and Contrast Sensing Models



Color Sensors

5

- Can be programmed to recognize three different colors independently
- Capable of sensing targets 5–45 mm away from the sensor face
- Rectangular plastic package features a fourdigit display, two programming buttons and output status LEDs
- Optional serial connection (RS485) allows for remote communications
- Standard M12 8-pin micro-connector (mating cable available on Page V8-T5-43)



Contrast Sensors

- Ideal for detecting different colored or grayscale contrasts, such as registration marks
- Capable of sensing targets out to 10 mm from the sensor face
- Simple three-step setup routine for quick installation or optional "fine setup routine" for more complicated applications
- Complementary outputs can function in either light operate or dark operate modes
- Standard M12 4-pin micro-connector (mating cable available on Page V8-T5-43)

Color Sensing Basics

Color sensors work by using a "chromaticity" detection algorithm. Chromaticity is determined by two characteristics: hue and saturation. Hue is determined by the reflected light's wavelength, while saturation indicates the pureness percentage (with white representing 0%). Eaton's color sensor goes one step further and provides an optional "chromaticity plus intensity" algorithm. This mode provides a higher sensitivity to tone variations and is recommended for detection of different colors on the same type of material. It will also better distinguishes between gray tones.

The color of a target is determined by the color components of the reflected source light. The target color is identified by analyzing the red (R), green (G) and blue (B) channels of reflected light. For example, yellow can be identified by the following reflections: R=50%, G=50%, B=0%; orange can be identified by R=75%, G=25%, B=0%; pink by R=50%, G=0%, B=0%. The RGB combinations are practically limitless. Applications for color sensors are common in many industries, ranging from quality and process control, to automatic material handling for identification, to orientation and selection of objects according to their color.

Contrast Sensing Basics

Contrast sensors (also defined as color mark readers, according to their most popular application) go beyond simple presence/absence detection to distinguish two surfaces according to the contrast produced by their difference in reflectivity. For example, a dark reference mark (low reflectivity) can be detected by comparing it against the contrast of the lighter surface (high reflectivity). A white LED light source is used for general purpose contrast sensing, enabling detection of the very slightest of contrast variations—even those that share the same general material and color. Contrast sensors are frequently used in automated packaging applications for registration mark detection to automate the folding, cutting and sorting phases.

Overview—Luminescence Sensing Models



Luminescence Sensors

- Perfect for the detection of any luminescent target, even on reflective materials such as ceramics, metal or mirrored glass
- Capable of sensing from 8-20 mm from the sensor face
- Simple three-step setup routine and optional "fine setup routine" for more complicated applications
- · Can function in either light operate or dark operate mode
- Standard M12 4-pin micro-connector (mating cable available on Page V8-T5-43

Luminescence Sensing Basics

Luminescence is defined as visible light emission from fluorescent or phosphorescent substances. Luminescence sensors emit ultraviolet light, which is then reflected at a higher wavelength from the target surface. The UV emission from the sensor is modulated and the visible light received is synchronized, resulting in immunity against external interferences such as reflections caused by shiny objects. Luminescence sensors are used in various industries to detect labels, fluorescent marks or signs, fluorescent glues on paper, to distinguish cutting and sewing guides, and to check fluorescent paints or lubricants.

Color, Contrast and Luminescence Sensing

Color, Contrast and Luminescence Sensing Models Voltage Connection ① **Output Type** Sensing Range **Catalog Number** Range Rectangular Color Sensors (50 x 50 x 25 mm) 10-30 Vdc 3 NO PNP outputs E76-CLRMKP-M12 5-45 mm 8-pin micro-(0.19-1.77 in) @ $\operatorname{connector} \textcircled{1}$ 3 NO NPN outputs E76-CLRMKN-M12 3 NO NPN outputs, E76-CLRMKRS-M12 RS485 connection 3 Flat Tubular (18 mm) **Contrast Sensors** 10-30 Vdc 10 mm 4-pin micro-Light operate or dark E76-CNT010P-M12 connector (0.39 in) ideal operate, PNP output Light operate or dark E76-CNT010N-M12 operate, NPN output Flat Tubular (18 mm) Luminescence Sensors 10-30 Vdc 8–20 mm 4-pin micro-Light operate or dark E76-UV020P-M12 7 50.0 70 operate, PNP output (0.31-0.79 in) connector





Notes

- ① For complete connector cables, see Page V8-T5-38.
- ② Refer to Detection Diagram on Page V8-T5-43.
- ③ Sensing parameters may be adjusted using the RS485 serial interface. The RGB color data is not available through this serial link.

Compatible Connector Cables



M12 Micro-Connector, Straight Female	Standard Cables [®]								
	Voltage Style	Number of Pins	Gauge	Length	Pin Configuration/Wire Colors (Face View Female Shown)	PVC Catalog Number	PUR Catalog Number	IRR PUR Catalog Numbe	
	Micro-Co	onnector, St	traight Fem	nale					
	DC	4-pin,	22 AWG	6 ft (2 m)	- (1) (2) 1-Brown 2-White	CSDS4A4CY2202	CSDS4A4RY2202	CSDS4A410220	
		4-wire		16.4 ft (5 m)		CSDS4A4CY2205	CSDS4A4RY2205	CSDS4A410220	
				32.8 ft (10 m)		CSDS4A4CY2210	CSDS4A4RY2210	CSDS4A4I0221	
		5-pin,	22 AWG	6 ft (2 m)	1-Brown	CSDS5A5CY2202	_	_	
		5-wire		16.4 ft (5 m)	- (1 2) 5 3 4) 2-White 3-Blue 4-Black	CSDS5A5CY2205	_	_	
				32.8 ft (10 m)	5-Green/Yellow	CSDS5A5CY2210	_	_	
		8-pin,	24 AWG	6 ft (2 m)		CSDS8A8CB2402	_	_	
		8-wire		16.4 ft (5 m)	- (1) (2) (7) (8) (3) 2-Brown 6-Pink 3-Green 7-Blue	CSDS8A8CB2405	_	_	
				32.8 ft (10 m)	- 6 4 4-Yellow 8-Red	CSDS8A8CB2410	_	_	

Accessories

IntelliView Series Sensors

		Catalog Number					
Mounting Brackets—L-Shaped							
L-shaped mounting bracket for IntelliView sensors	All models starting with E75-PPA_	E75-MTB1					
Mounting hardware included							
Long L-shaped mounting bracket for IntelliView sensors	All models starting with E76-CLR_	E76-MTB1					
Mounting hardware included	and E75-PP1MP-M12						
Adjustability: Allows same adjustment in one axis and	All 19 mm flat tubular concore	6161AS6501					
allows for aiming of the sensor through a short arc	All to film hat tubular sensors	0101A30301					
Sensor mounting: Sensor mounts with two jam nuts and washers (included with sensor)							
Material of construction: Aluminum with chromate finish							
Packaging: Two per package							
Mounting Bracket Ball Swivel							
Allows 360° rotation and 10° vertical tilt	All 18 mm flat tubular sensors	6181AS5200					
Hole spacing is identical to our 50 and 55 series sensors							
Ideal for mounting Right Angle sensors							
Made of Noryl [®]							
	L-shaped mounting bracket for IntelliView sensors Mounting hardware included Long L-shaped mounting bracket for IntelliView sensors Mounting hardware included Adjustability: Allows some adjustment in one axis and allows for aiming of the sensor through a short arc Sensor mounting: Sensor mounts with two jam nuts and washers (included with sensor) Material of construction: Aluminum with chromate finish Packaging: Two per package Mounting Bracket Ball Swivel Allows 360° rotation and 10° vertical tilt Hole spacing is identical to our 50 and 55 series sensors Ideal for mounting Right Angle sensors	L-shaped mounting bracket for IntelliView sensors All models starting with E75-PPA_ Mounting hardware included All models starting with E76-CLR_ and E75-PP1MP-M12 Adjustability: Allows some adjustment in one axis and allows for aiming of the sensor through a short arc All 18 mm flat tubular sensors Sensor mounting: Sensor mounts with two jam nuts and washers (included with sensor) All 18 mm flat tubular sensors Material of construction: Aluminum with chromate finish Packaging: Two per package All 18 mm flat tubular sensors Allows 360° rotation and 10° vertical tilt Hole spacing is identical to our 50 and 55 series sensors All 18 mm flat tubular sensors					

Additional Mounting Brackets

More mounting brackets compatible with IntelliView sensors, see Tab 8, section 8.2
--

Dimensions, see Page V8-T5-47.

Note

① For a full selection of connector cables, see Tab 10, section 10.1.

5

Technical Data and Specifications

Foreground/Background Suppression Models

Description	Specification
Input voltage	10-30 Vdc
Ripple	2 Vpp max.
Outputs	PNP, NO or NC; 30 Vdc max.
Output current	100 mA max. (short-circuit protected)
Output saturation voltage	< 2 V max.
Response time	1 ms
Switching frequency	500 Hz
Indicator LEDs	For E75-PPA: Output LED (red), stability LED (green) For E75-PP1: Output LED (yellow), stability LED (green)
Gain adjustment	For E75-PPA: Adjustment screw (except for E75-PPA010P) For E75-PP1: Six-turn adjustment pot with numerical indicator
Operating temperature	–25 to 55 °C (–13 to 131 °F)
Storage temperature	–25 to 70 °C (–13 to 158 °F)
Electrical protection	Class 2
Sensing distance	Varies by model, see model selection table on Page V8-T5-37
Beam type	All models except E75-PPA010P-M12: Infrared LED 880 nm E75-PPA010P-M12: Red LED
Vibration	Amplitude: 0.5 mm Frequency: 10–55 Hz for every axis (EN60068-2-6)
Shock resistance	Half sine, 30 g _n , 11 ms, 3 axes
Housing material	ABS
Lens material	PMMA
Enclosure ratings	For E75-PPA_: IP65 For E75-PP1_: IP67
Connections	M12 4-pin micro-connector
Weight	40 g max.

Description	For E75-DST4_ (Long-Range Distance Sensor) Specification
Input voltage	16–28 Vdc
Ripple	2 Vpp max.
Current consumption (Output current excluded)	120 mA max.
Outputs	Analog, 0–10 V 2 PNP outputs 30 Vdc max.
Output switching mode	Light operate (output on when target present)
Output current	100 mA max. (short-circuit protected)
Output saturation voltage	< 2 V max.
Response time	12 ms
Switching frequency	42 Hz
Indicator LEDs	2 output LEDs (yellow) Power/alarm LED (green)
Distance adjustment	Dual buttons
Warm-up	15 min
Operating temperature	0 to 50 °C (32 to 122 °F)
Storage temperature	-20 to 70 °C (-4 to 158 °F)
Measurement range	0.3-4.0 m (1.0-13.1 ft)
Linearity	< 1% (24 Vdc, 25 °C, with 90% white target)
Repeatability	±4mm
Hysteresis	20 mm
Temperature drift	< 1 mm per °C
Beam type	Red laser (665 nm), Class 2 EN 60825-1 (1994) A1 (2002) A2 (2001)
Vibration	Amplitude: 0.5 mm Frequency: 10–55 Hz for every axis (EN60068-2-6)
Shock resistance	Half sine, 30 g _n , 11 ms, 3 axes
Material of construction	ABS
Lens material	PMMA
Enclosure ratings	IP67
Connections	M12 5-pin micro-connector
Weight	92 g max.

Distance Sensing Models-Long Range

Color Sensing Models

Description	Specification
Input voltage	10-30 Vdc
Ripple	2 V max.
Current consumption (Output current excluded)	60 mA max.
Outputs	3 PNP outputs 30 Vdc max. (short-circuit protected)
Output switching mode	100 mA max.
Output saturation voltage	<2V
Response time	650 µs
Switching frequency	770 Hz
Indicator LEDs	4-digit display (green), Output LED (yellow), 3 status LEDs (green)
Sensing adjustment	SET, SEL buttons
Operating temperature	–10 to 55 °C (14 to 131 °F)
Storage temperature	–20 to 70 °C (–4 to 158 °F)
Protection	Class 2
Sensing distance	20 mm (0.79 in)
Beam spot dimension	Ø 4 mm
Beam type	White LED (400–700 nm)
Vibration	Amplitude: 0.5 mm Frequency: 10–55 Hz for every axis (EN60068-2-6)
Shock resistance	Half sine, 30 g _n , 11 ms, 3 axes
Material of construction	ABS thermoplastic
Lens material	Glass window and lens
Mechanical protection	IP67
Connections	M12 8-pin micro-connector

5.3

IntelliView Series Sensors

Contrast Sensing Models

Description	Specification
Input voltage	10–30 Vdc
Ripple	2 V max.
Current consumption (Output current excluded)	25 mA max.
Outputs	PNP or NPN by model, NO and NC, 30 Vcc max. (short-circuit protected)
Output current	100 mA max.
Output saturation voltage	< 2 V
Response time	185 µs
Switching frequency	2.7 kHz
Indicator LEDs	Output LED (yellow) Ready/error LED (green/red)
Data retention	EEPROM non-volatile memory
Operating mode	Light operate on NO output Dark operate on NC output
Operating temperature	–10 to 55 °C (14 to 131 °F)
Storage temperature	-20 to 70 °C (-4 to 158 °F)
Operating distance	10 mm ± 2 mm
Beam type	White LED (400–700 nm)
Vibration	Amplitude: 0.5 mm Frequency: 10–55 Hz for every axis (EN60068-2-6)
Shock resistance	Half sine, 30 g _n , 11 ms, 3 axes
Material of construction	PBT
Lens material	PMMA plastic
Enclosure ratings	IP67
Connections	M12 4-pin micro-connector cable
Weight	25 g max.

Description	Specification					
Input voltage	10–30 Vdc					
Ripple	2 V max.					
Current consumption (Output current excluded)	25 mA max.					
Outputs	PNP or NPN by model, NO and NC, 30 Vcc max. (short-circuit protected)					
Output current	100 mA max.					
Output saturation voltage	< 2 V					
Response time	1.1 ms					
Switching frequency	445 Hz					
Indicator LEDs	Output LED (yellow) Relay/error LED (green/red)					
Data retention	EEPROM non-volatile memory					
Operating mode	Light operate on NO output Dark operate on NC output					
Operating temperature	–10 to 55 °C (14 to 131 °F)					
Storage temperature	–10 to 70 °C (–4 to 158 °F)					
Sensing distance	8–20 mm (best signal at 10 mm)					
Beam type	White LED (400–700 nm)					
Vibration	Amplitude: 0.5 mm Frequency: 10–55 Hz for every axis (EN60068-2-6)					
Shock resistance	Half sine, 30 g _n , 11 ms, 3 axes					

Material of construction

Lens material

Connections

Weight

Enclosure ratings

PBT

IP67

25 g max.

PMMA plastic

M12 4-pin micro-connector cable

5


Detection Diagrams


Foreground/Background Suppression Models

Models starting with E75-PPA_ or E76-PP1_

Black/White Difference


E75-PPA010P-M12 1






E75-PPA025P-M12 ①

E75-PPA050P-M12 ①



E75-PPA110P-M12

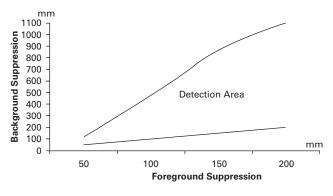


Distance Sensing Models (Rectangular Package Only)


Models E75-DST400A010-M12

Analog Output Diagram

Digital Output Diagram

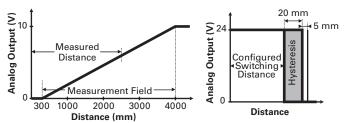

Black/White Difference




Note

These diagrams depict the width of the sensing beam over distance. These diagrams also show the sensing difference between white and gray targets. Because gray is less reflective than white, gray targets will typically need to come closer to the beam centerpoint to be detected.

Color Sensing Models

Models E76-CLRMKN-M12, E76-CLRMKP-M12, E76-CLRMKRS-M12


Color Detection Diagram



Luminescence Sensing Models


Models starting with E76-CN_

Contrast Detection Diagram



Models starting with E76-UV_

Luminescence Detection Diagram




5

Wiring Diagrams

Pin numbers are for reference, rely on pin location when wiring.

IntelliView Series Sensors

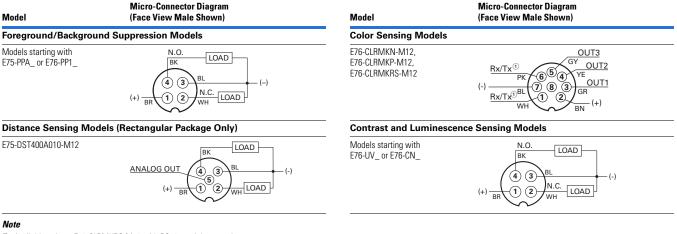


① Available only on E76-CLRMKRS-M12 with RS485 serial connection.

Dimensions


Approximate dimensions in inches (mm)

Foreground/Background Suppression Models

Models starting with E75-PP1_

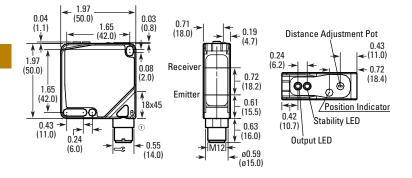

Models starting with E75-PPA_

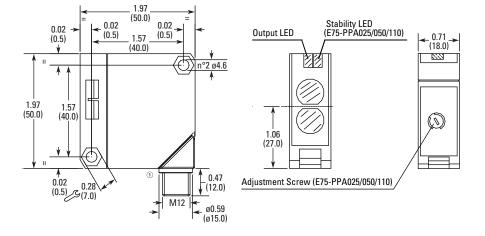


Note

① Connector can rotate 90 or 180 degrees to accept different sensor mounting orientations.

Approximate dimensions in inches (mm)


Distance Sensing Models (Rectangular Package Only) E75-DST400A010-M12

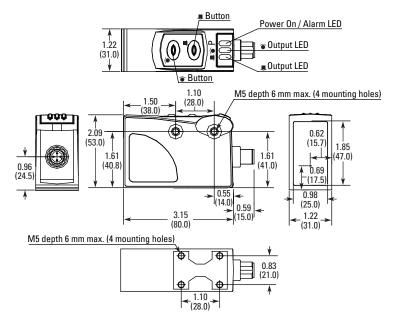

Approximate dimensions in inches (mm)


Color Sensing Models

E76-CLRMKN-M12, E76-CLRMKP-M12, E76-CLRMKRS-M12

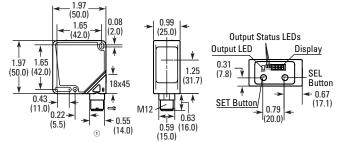

Contrast and Luminescence Sensing Models

Models starting with E76-UV_ or E76-CN_

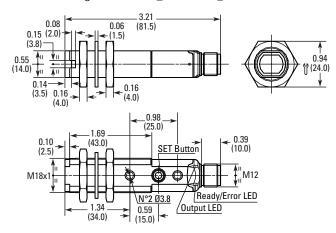


Note

① Connector can rotate 90 or 180 degrees to accept different sensor mounting orientations.


Approximate dimensions in inches (mm)

Accessories—Mounting Brackets


E76-MTB1-Long L-Shaped Mounting Bracket

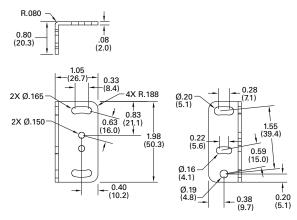


E75-MTB1-L-Shaped Mounting Bracket

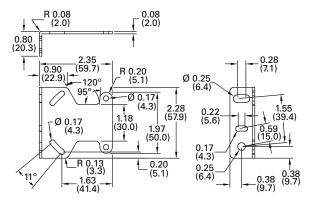

6181AS5200-Ball Swivel



6161AS6501-L-Shaped



5

5.4

Photoelectric Sensors

SM Series Sensors

SM Series Sensors

Contents

Description	Page
SM Series Sensors	
Product Overview	V8-T5-49
Product Selection	
SM Series Sensors	V8-T5-50
Compatible Connector Cables	V8-T5-51
Accessories	V8-T5-51
Technical Data and Specifications	V8-T5-52
Excess Gain	V8-T5-52
Wiring Diagrams	V8-T5-53
Dimensions	V8-T5-53

SM Series Sensors

Product Description

The SM Series from Eaton's Electrical Sector provides high performance and ease of use in an economical, compact package.

Lock In on Great Performance with TargetLock

A sensor can have the greatest performance in the world, but if it is slightly misaligned or the target is positioned at the wrong range, you will have reliability problems sooner or later. TargetLock not only simplifies sensor setup but visually confirms your sensor is positioned to operate with the highest possible reliability. In addition, TargetLock provides diagnostic information during use to inform you of impending problems before they result in equipment downtime.

No Sensor Is Easier to Use

The SM Series includes many other features that simplify use. Visible sensing beams on all models show you exactly where the sensors are pointing. The durable housing features multiple mounting options to easily fit on your equipment in the tightest of spaces. Full protection from overvoltage, reverse polarity and short circuits reduces the chance of damage. Bright 360° LED indicators clearly show sensor status.

Application Description

Typical Applications


- Packaging machines
- Conveyors and other material handling equipment
- Food processing equipment
- Assembly machines
- Pharmaceutical machines

Features

- Highly visible LED indicators for power, output and TargetLock
- TargetLock simplifies setup and ensures the sensor operates at the highest level of reliability possible
- PerfectProx models sense different colored targets at the same range and ignore objects in the background
- AC/DC models operate on either 18–264 Vac or 18–50 Vdc
- DC-only models feature both NPN and PNP outputs
- Visible beam on all models lets you see exactly where the sensor is pointing
- Compact size to fit in tight spaces
- Multiple mounting options including industry standard 18 mm threads
- Reverse polarity, overload and short circuit protection
- Full family includes thrubeam, polarized reflex, diffuse reflective and PerfectProx background rejection

Standards and Certifications

- UL Listed, E166051UL tested to Canadian
- safety standards
- CE (DC models only)
- RoHS compliant



DANGER

THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.

For the most current information on this product, visit our website: www.eaton.com/sensors For Customer Service in the U.S. call 915-401-8307, in Canada call 1-800-268-3578. For Application Assistance in the U.S. and Canada call 1-877-ETN CARE (386-2273).

Product Overview

Unparalleled Optical Performance—PerfectProx

Exceptional background rejection sets PerfectProx apart from all other sensors. Just point the sensor's visible beam at the target and get reliable detection regardless of color, reflectance, contrast or surface shape, while ignoring background objects just a fraction of an inch away.

Fast and Easy Setup

The SM Series features an advanced 3-LED indicator display to provide valuable information at a glance. The bright display is clearly visible from 360°. In addition to LEDs for power and output status indication, the SM features a third LED that is part of the TargetLock system.

TargetLock is a

microprocessor- controlled system that enables you to quickly and easily align the sensor and ensure it is operating most reliably.

• Alignment: The TargetLock LED provides a quick and easy way to set up the sensor for optimum operation. On initial setup, when you have achieved the minimum signal required for the sensor to operate, the TargetLock LED will blink in a short flash pattern. As you improve the setup and approach the best alignment and range, the LED changes from short flash to long flash to a solid ON condition. This means that even after you reach a point where the sensor will operate in the application. you are able to further fine tune the setup for highest reliability.

LED Indicators

LED	State	Thru-Beam/Reflex LED Condition	Diffuse/ PerfectProx LED Condition	
Power (green)	ON	Power is applied to sensor	Power is applied to sensor	
	OFF	No power	No power	
Output (red)	ON	Output is ON	Output is ON	
	OFF	Output is OFF	Output is OFF	
	Flashing	Output is short circuited or overloaded	Output is short circuited or overloaded	
TargetLock (orange)	ON	Excellent alignment; sensor is operating within optimum range	Target present—excellent gain; sensor is operating within optimum range	
	Long flash Good alignment ①		Target present—good gain	
	Short flash	Poor alignment ①	Target present—poor gain	
	OFF	Target is present; if no target present, sensor is out of alignment or beyond range	No target, or sensor is beyond range	

Note

① A target that doesn't fully block the effective sensing beam or is translucent may cause a flashing indication and unreliable performance.

• Maintenance: Another valuable feature of the TargetLock LED is to indicate the need for maintenance prior to loss of sensor operation. Observing a change from the normal operation of the LED (for example, from solid ON to a long flash) indicates the gain has been reduced. Possible causes include bumping or vibrating out of alignment or contamination buildup on the lens. With the TargetLock LED, you are made aware of this condition before the sensor stops working, allowing you ample time to address the problem before your machine goes down.

See table (this page) for details of the function of each of the SM Series LED indicators.

Gain Adjustment


Thru-beam and diffuse reflective sensors include an adjustment control for optimizing the amount of gain for the application. The 3/4turn pot provides a 10:1 adjustment of gain. A mechanical stop eliminates the possibility of sensor damage. Adjustment of the control does not require any special tools.

Mounting


The SM sensor features two mounting holes in the rectangular section of the body for mounting to a surface with #6 or smaller hardware. The threaded barrel and jam nut allow mounting into any 0.75 in (19 mm) hole or a selection of accessory mounting brackets available from Eaton and detailed in **Tab 8**, **section 8.2**.

5

Mounting Sensor using #6 Hardware



Mounting Sensor using a Jam Nut



Mounted SM Sensor in 18 mm Ball Swivel Bracket See Tab 8, section 8.2.



SM Series Sensors

Product Selection

SM Series Sensors

		Operating Voltage	Sensing Range	Optimum Range	Cutoff Range	Field of View	Thru-Beam Component	Connection Type	Light Operate Catalog Number	Dark Operate Catalog Number
Thru-Beam	1	Thru-Bean	n							
		10–30 Vdc	50 ft (15 m)	0.1 to 25 ft	_	10 in (254 mm)	Source	2m cable	E65-SMTS15-HA	E65-SMTS15-HA
				(30 to 7.5 m)		diameter at 10 ft (3 m)		4-pin micro DC connector	E65-SMTS15-HAD 🕄	E65-SMTS15-HAD 🕄
							Detector	2m cable	E65-SMTD15-HL	E65-SMTD15-HD
Source	Detector							4-pin micro DC connector	E65-SMTD15-HLD 🤃	E65-SMTD15-HDD 🕃
olarized Re	eflex ^②	Polarized I	Reflex							
		18–264 Vac	10 ft (3 m)	0.1 to 5 ft	_	1 in (25 mm)	_	2m cable	E65-SMPR3-GL	E65-SMPR3-GD
	50/60 Hz or 18–50 Vdc		(30 to 1.5 m)		diameter at 50 in (1.3 m)		4-pin micro AC connector	E65-SMPR3-GLD 🔅	E65-SMPR3-GDD 🔅	
Retro- reflector Sensor	10–30 Vdc r	10 ft (3 m)	0.1 to 5 ft	_	1 in (25 mm) diameter at 50 in (1.3 m)	_	2m cable	E65-SMPR3-HL	E65-SMPR3-HD	
			(30 to 1.5 m)				4-pin micro DC connector	E65-SMPR3-HLD 🏵	E65-SMPR3-HDD 🕃	
iffuse Refle	ective	Diffuse Reflective								
		18–264 Vac 50/60 Hz or 18–50 Vdc	Hz or (200 mm)	0.25 to 5 in (6 to 127 mm)		2 in (50 mm) diameter at 5 in (127 mm)	_	2m cable	E65-SMSD200-GL	E65-SMSD200-GD
								4-pin micro AC connector	E65-SMSD200-GLD 🔅	E65-SMSD200-GDD 🏵
-		10–30 Vdc	80 Vdc 8 in (200 mm) ③	0.25 to 5 in (6 to 127 mm)	_	2 in (50 mm) diameter at 5 in (127 mm)		2m cable	E65-SMSD200-HL	E65-SMSD200-HD
1								4-pin micro DC connector	E65-SMSD200-HLD 🏵	E65-SMSD200-HDD 🏵
erfectProx		PerfectPro	x							
-		18–264 Vac	2 in	0.4 to 1.8 in	2.3 in	0.25 in (6 mm)	_	2m cable	E65-SMPP050-GL	E65-SMPP050-GD
and the		50/60 Hz or 18–50 Vdc	50/60 Hz or (50 mm) 18–50 Vdc	(10 to 45 mm)	(58 mm) and beyond ④	diameter at 2.25 in (57 mm)		4-pin micro AC connector	E65-SMPP050-GLD 🏵	E65-SMPP050-GDD 🏵
1			4 in	0.5 to 3 in	5 in	0.35 in (9 mm)	_	2m cable	E65-SMPP100-GL	E65-SMPP100-GD
Ĩ			(100 mm)	(13 to 76 mm)	(127 mm) and beyond ④	diameter at 5 in (127 mm)		4-pin micro AC connector	E65-SMPP100-GLD 🕃	E65-SMPP100-GDD 🏵
		10–30 Vdc	2 in	0.4 to 1.8 in	2.3 in	0.25 in (6 mm)	_	2m cable	E65-SMPP050-HL	E65-SMPP050-HD
			(50 mm)	nm) (10 to 45 mm)	nm) (58 mm) and beyond ④	diameter at 2.25 in (57 mm)		4-pin micro DC connector	E65-SMPP050-HLD 🔅	E65-SMPP050-HDD 🔅
			4 in	0.5 to 3 in	5 in	0.35 in (9 mm)	_	2m cable	E65-SMPP100-HL	E65-SMPP100-HD
			(100 mm)	(13 to 76 mm)	(127 mm) and beyond ©	diameter at 5 in (127 mm)		4-pin micro DC connector	E65-SMPP100-HLD 🕃	E65-SMPP100-HDD 🕄

Notes

③ See listing of compatible connector cables on Page V8-T5-51.

- $\textcircled{\sc 0}$ For a complete system, order one source and one detector
- $@\;$ For complete system, order sensor and retroreflector (see Tab 8, section 8.1).
- ③ Nominal range—sensor will detect a 90% reflectance white card at this range.
- ⁽⁴⁾ Sensor will ignore a 90% reflectance white card at this range.

5

5

SM Series Sensors

Photoelectric Sensors

Compatible Connector Cables

Micro-Style, Straight Female	Standard Cables—Micro ①								
	Voltage Style	Number of Pins	Gauge	Length	Pin Configuration/Wire Colors (Face View Female Shown)	PVC Jacket Catalog Number	PUR Jacket Catalog Number	IRR PUR Jacket Catalog Number	
	Micro-Style, Straight Female								
	AC	4-pin, 4-wire	22 AWG	6 ft (2 m)	(1) (1) (1) (1) (1) (2) 1-Red/Black 2-Red/White 3-Red 4-Green	CSAS4F4CY2202	CSAS4F4RY2202	CSAS4F4102202	
	DC	4-pin, 4-wire	22 AWG	6 ft (2 m)	1-Brown 2-White 3-Blue 4-Black	CSDS4A4CY2202	CSDS4A4RY2202	CSDS4A4102202	

Accessories

SM Series Sensors

Description	Reference
Retroreflectors and retroreflective tape	See Tab 8, section 8.1
Mounting brackets	See Tab 8, section 8.2
Replacement mounting nuts and other accessories	See Tab 8, section 8.3
Connector cables	See Tab 10, section 10.1

Note

^① For a full selection of connector cables, see **Tab 10**, **section 10.1**.


Technical Data and Specifications

SM Series Sensors

	AC/DC Model		DC Model
Description	AC Operation Specification	DC Operation Specification	Specification
Input voltage	18–264 Vac, 50/60 Hz	18–50 Vdc	10–30 Vdc
Power dissipation	4 VA maximum	4 VA maximum	2 W maximum
Output type	VMOS (bi-directional)	NPN (sink)	NPN and PNP (dual outputs)
Current switching	200 mA maximum	200 mA maximum	100 mA maximum
Voltage switching	264 Vac	50 Vdc	30 Vdc maximum
OFF-state leakage	500 μA maximum	500 μA maximum	10 µA maximum
Surge current	2 A maximum	2 A maximum	1 A maximum
ON-state voltage drop	3.5 V maximum	3.5 V maximum	2.5 V maximum
Response time	16 ms	1 ms	1 ms
Protection	0	0	0
Light/dark operation	By model	By model	By model
Temperature range			
Operating	–13 to 131 °F (–25 to 55 °C)	–13 to 131 °F (–25 to 55 °C)	–13 to 131 °F (–25 to 55 °C)
Storage	–13 to 158 °F (–25 to 70 °C)	–13 to 158 °F (–25 to 70 °C)	–13 to 158 °F (–25 to 70 °C)
Material of construction	Lens: Polycarbonate; cable jacket: PVC; body: Cycoloy	Lens: Polycarbonate; cable jacket: PVC; body: Cycoloy	Lens: Polycarbonate; cable jacket: PVC; body: Cycoloy
Cable/connector	Cable models: 6 ft (2 m) four-wire cable; connector models: 4-pin, micro-connector (AC-key on AC/DC models; DC-key on DC models)	Cable models: 6 ft (2 m) four-wire cable; connector models: 4-pin, micro-connector (AC-key on AC/DC models; DC-key on DC models)	Cable models: 6 ft (2 m) four-wire cable; connector models: 4-pin, micro-connector (AC-key on AC/DC models; DC-key on DC models)
Vibration and shock	Vibration: 30 g over 10 Hz to 2 kHz; shock: 50 g for 10 ms 1/2 sinewave pulse	Vibration: 30 g over 10 Hz to 2 kHz; shock: 50 g for 10 ms 1/2 sinewave pulse	Vibration: 30 g over 10 Hz to 2 kHz; shock: 50 g for 10 ms 1/2 sinewave pulse
Indicator LEDs	Green LED: Power; red LED: Output; orange LED: TargetLock	Green LED: Power; red LED: Output; orange LED: TargetLock	Green LED: Power; red LED: Output; orange LED: TargetLock
Source light	Visible red, 660 nm	Visible red, 660 nm	Visible red, 660 nm
Gain adjustment	3/4-turn pot, 10:1 adjustment of gain (provided on thru-beam and diffuse reflective sensors only)	3/4-turn pot, 10:1 adjustment of gain (provided on thru-beam and diffuse reflective sensors only)	3/4-turn pot, 10:1 adjustment of gain (provided on thru-beam and diffuse reflective sensors only)
Sunlight immunity	PerfectProx 5000 ft-candles; all others: 10,000 ft-candles	PerfectProx 5000 ft-candles; all others: 10,000 ft-candles	PerfectProx 5000 ft-candles; all others: 10,000 ft-candles
Enclosure ratings	NEMA 1, 3, 4, 4X, 6, 6P, 12 and 13; IP68, IP69	NEMA 1, 3, 4, 4X, 6, 6P, 12 and 13; IP68, IP69	NEMA 1, 3, 4, 4X, 6, 6P, 12 and 13; IP68, IP69

Excess Gain

Thru-Beam




1. Thru-beam

- 2. Polarized reflex
- (based on a 3 in diameter retroreflector)

Note


① Short circuit and overload protection (output indicator LED will flash). Reverse polarity protection (sensor will reset automatically once fault is removed). IMPORTANT: During installation, correct power connections must be made first to ensure fail-safe short circuit protection of the outputs.

PerfectProx



50 mm PerfectProx
 100 mm PerfectProx

Diffuse Reflective



Diffuse reflective (based on a 90% reflectance white card)

5

Wiring Diagrams

Pin numbers are for reference, rely on pin location when wiring.


SM Series Sensors

Operating Voltage	Mode	Cable Model	Micro-Connector Model (Face View Male Shown)
Three-Wire Sensors	;		
18–264 Vac, 50/60 Hz or 18–50 Vdc	All sensors	BN WH No Connection BU L2 or +V	L2 or +V Load 3 No Connection
Four-Wire Sensors			
10–30 Vdc	Thru-beam source	BN +V BU (-)	(-) (2 (1) +V (3 (4) +V
	All others	BN WH Load BU (-)	

Dimensions

Approximate dimensions in inches (mm)

SM Series Sensors

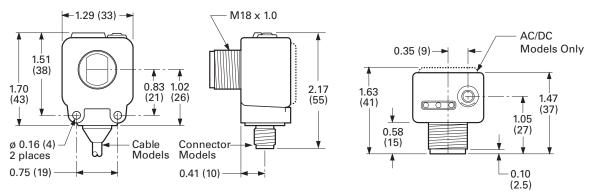

5.5

Photoelectric Sensors

Comet Series Sensors

Comet Series Sensors



Comet Series Sensors

Product Description

The Comet Series from Eaton's Electrical Sector is a complete line of high performance, 18 mm tubular sensors with a variety of models and modes to solve virtually any sensing problem.

The sensors are available in thru-beam, reflex, polarized reflex, diffuse reflective, focused diffuse reflective, wide angle diffuse reflective, PerfectProx, fine spot PerfectProx and fiber optic sensing. PerfectProx is one of the most powerful problemsolving sensors available. These sensors can reliably detect targets of different color, reflectance, contrast or surface shape at the same range, while ignoring background objects just a fraction of an inch away.

The Comet Series includes AC/DC and DC-only models with two-, three- and fourwire circuitry. Choose from cable or micro-connector. Mini-connectors are available on two-wire models for easy retrofit. Each sensor features a Light/ Dark Operation switch and a gain control to provide for quick adjustment to peak optical performance.

The unique threaded body with flat sides allows quick mounting in a 3/4 inch hole or against any flat surface. Internal components are rigidly sealed in a solid encapsulated package for excellent performance in high-vibration and high-shock applications.

Features

- Industry standard 18 mm diameter threaded body has flat sides allowing it to be mounted like a tubular sensor or against any flat surface
- Right Angle viewing models mount in a depth of only 6/10th of an inch

 PerfectProx technology provides exceptional background rejection and application problem-solving

Contents

Description

Comet Series Sensors

Product Selection

Product Overview

Thru-Beam Sensors

Reflex Sensors Diffuse Reflective and Focused Diffuse Reflective Sensors

PerfectProx Background Rejection Sensors

Fiber Optic Sensors

Glass Fiber Optic Adapter

Compatible Connector Cables

Excess Gain

Accessories

Technical Data and Specifications

Wiring Diagrams

Dimensions

- Visible sensing beams let you see where the beam is aimed for quick setup and alignment
- Solid polyurethane housing completely encapsulates internal circuits for high resistance to shock and vibration
- Adaptable modulation circuit provides immunity to crosstalk from other closely mounted sensors
- Models available with both AC and DC operation in a single unit—up to 264 Vac
- Four-wire DC sensors offer both NPN and PNP outputs
- Output status indicator visible from a wide 270° angle

Standards and Certifications

Page

V8-T5-55

V8-T5-56 V8-T5-57

V8-T5-58

V8-T5-59

V8-T5-61

V8-T5-61

V8-T5-62

V8-T5-62

V8-T5-63

V8-T5-65 V8-T5-66

V8-T5-66

- UL Recognized, E117028
- CSA certified, 50513
- CE (DC models only)
- RoHS compliant



DANGER

THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.


For the most current information on this product, visit our website: www.eaton.com/sensors For Customer Service in the U.S. call 915-401-8307, in Canada call 1-800-268-3578. For Application Assistance in the U.S. and Canada call 1-877-ETN CARE (386-2273).

Product Overview

Product Comparison

Eaton's cost-effective Prism Series, OEM Prism and premium Comet Series all share the same 18 mm flatsided housing. This results in the largest interchangeable sensor family available, allowing you to select from well over 250 different models to solve the widest variety of sensing applications.

Comparison



Compared to similar-looking Prism and OEM Prism, the Comet Series includes the following advantages:

- AC/DC two-wire versions available
- Light/dark output configuration
- PerfectProx background rejection technology

Sensing Modes

Thru-Beam

This sensing mode is available with ranges of 20 and 80 ft (6 and 24 m). The 20 ft (6 m) range is available in forward and Right Angle viewing, and can be intermixed in any combination for the best fit in your application. Long range models feature a visible sensing beam to help simplify installation and alignment.

Reflex and Polarized Reflex

In reflex sensing, the sensing beam is reflected from a retroreflector back to the sensor. The Comet Series includes standard and polarized models with twowire, three-wire and four-wire circuits. Right Angle models are also available. Polarized models feature a polarizing filter built into the sensor to ensure that only light reflected from a corner-cube retroreflector is recognized by the sensor. This allows reliable detection of shiny targets that could reflect light and be missed by a nonpolarized sensor. Most models include a visible sensing beam for easy installation and alignment.

Diffuse Reflective, Focused Diffuse and Wide Angle Diffuse

A wide variety of diffuse reflective models are available with ranges of 8 in (200 mm) and 24 in (610 mm). Forward and Right Angle viewing configurations offer identical optical performance in this series. Focused diffuse reflective models feature a light beam that is focused at a point 1.6 in (40 mm) in front of the sensor lens for applications where you need to avoid sensing objects in front of or behind the target. Wide angle diffuse models provide a large spot and wide detection area.

PerfectProx

This is a unique type of diffuse reflective sensor that combines extremely high sensing power (called "excess gain") with a sharp optical cutoff to ignore backgrounds. This allows the sensor to reliably detect targets regardless of variations in color, reflectance, contrast or surface shape, while ignoring objects that are just slightly outside the target range. This gives the PerfectProx an outstanding ability to solve sensing applications that would be difficult or impossible to manage with other types of sensors. It also makes PerfectProx one of the easiest photoelectric sensors to set up and use.

Eaton's Comet Series includes more background rejection models than any other family on the market. Choose from forward or Right Angle viewing, two-, three- or fourwire circuits, cable, micro or mini-connector terminations and a variety of sensing ranges. A visible sensing beam on most models lets you quickly confirm that the sensor is aligned correctly with the target. Fine spot models provide an extremely small 0.05 in (1.3 mm) light spot for accurately detecting tiny targets such as fine strands of wire or targets that are in or behind small diameter holes.


Fiber Optic

The Comet Series also includes sensors that utilize fiber optic cables to sense objects where space is restricted, temperatures are high, or tight viewing angles are required. Choose from models that accept low cost plastic fiber optic cables, or use our glass fiber optic adapter that inexpensively converts our standard diffuse reflective sensors for use with durable glass fiber optic cables.


Mounting

Comet Series sensors feature a threaded housing and include two jam nuts and washers for mounting into any 0.75 in (19 mm) hole or a selection of accessory mounting brackets available from Eaton. The flat sides of the sensor feature two mounting holes for easily attaching the sensor to any flat surface with #4 hardware.

Mounting Sensor using #4 Hardware



Mounting Sensor using a Jam Nut



Note: See Pages V8-T5-62 and V8-T5-63, and Tab 8, section 8.2 for a full list of mounting brackets compatible with the Comet Series.



5

Product Selection

Thru-Beam Sensors

Three-Wire and Four-Wire Sensors

г	_	
	Ξ	
-	υ	

Operating Voltage	Sensing Range	Optimum Range	Field of View	Thru-Beam Component	Connection Type	Catalog Number					
Thru-Beam Forward Viewing 👓											
20–264 Vac	20 ft (6 m)	0.1 to 10 ft	30 in (760 mm)	Source	6 ft cable	11100A6513					
50/60 Hz or 15–30 Vdc (NPN)	N)	(0.03 to 3 m)	diameter at 10 ft (3 m) ③	(Visible alignment beam)	4-pin micro AC connector	11100AQD03 🏽					
	-,		,	Detector	6 ft cable	12100A6513					
					4-pin micro AC connector	12100AQD03 🕮					
	80 ft (24 m)	0.1 to 40 ft	40 in (1 m)	Source	6 ft cable	11102A6513					
		(0.03 to 12 m)	diameter at 40 ft (12 m)	(Visible red beam)	4-pin micro AC connector	11102AQD03 🏽					
			,	Detector	6 ft cable	12102A6513					
					4-pin micro AC connector	12102AQD03 🕄					
10–30 Vdc	20 ft (6 m)	0.1 to 10 ft	30 in (760 mm)	Source	6 ft cable	11100A6517					
(NPN and PNP)	PN and PNP)	(0.03 to 3 m)	10 ft (3 m) ③	(Visible alignment beam)	4-pin micro DC connector	11100AQD07 🕮					
				Detector	6 ft cable	12100A6517					
					4-pin micro DC connector	12100AQD07 🏽					
	80 ft (24 m)	0.1 to 40 ft	40 in (1 m)	Source	6 ft cable	11102A6517					
		(0.03 to 12 m)	diameter at 40 ft (12 m)	(Visible red beam)	4-pin micro DC connector	11102AQD07 🕄					
			1011(1211)	Detector	6 ft cable	12102A6517					
					4-pin micro DC connector	12102AQD07 🛢					
Thru-Beam Right Angle Viewing 🔍											
20–264 Vac			30 in (760 mm)	Source	6 ft cable	11100R6513					
50/60 Hz or 15–30 Vdc (NP	N)	(0.03 to 3 m)	diameter at 10 ft (3 m) ③	(Visible alignment beam)	4-pin micro AC connector	11100RQD03 🙁					
				Detector	6 ft cable	12100R6513					
					4-pin micro AC connector	12100RQD03 🕲					
10-30 Vdc	20 ft (6 m)	0.1 to 10 ft	30 in (760 mm)	Source	6 ft cable	11100R6517					
(NPN and PNP)	IPN and PNP)	(0.03 to 3 m)	diameter at 10 ft (3 m) ③	(Visible alignment beam)	4-pin micro DC connector	11100RQD07 🕲					
	-		Detector	6 ft cable	12100R6517						
					4-pin micro DC connector	12100RQD07 🔅					

Notes

See listing of compatible connector cables on Page V8-T5-62.

^① For a complete system, order one source and one detector.

(2) 11100 sources and 12100 detectors may be interchanged in any combination. 11102 models must be used with 12102 models.

③ The effective beam (minimum object size that can be detected) is 0.25 in (6.5 mm) diameter.

Catalog Number

14102AS6515

Comet Series Sensors

Connection Type

6 ft cable

Reflex Sensors

Two-Wire Sensors

Sensing

Range 1

25 ft (7.6 m)

Standard Reflex Forward Viewing

Optimum

Range 2

0.1 to 15 ft

(0.03 to 4.5 m)

Operating

90–132 Vac

50/60 Hz or

18-50 Vdc

Voltage

Standard Reflex Forward Viewing

١



Retroreflector ³						3-pin micro AC connector	14102ASQD05 🕃
Polarized Reflex	Polarized Ref	lex Forward View	ving ④				
Forward Viewing	90–132 Vac 50/60 Hz or 18–50 Vdc	15 ft (4.5 m)	0.1 to 10 ft (0.03 to 3 m)	1 in (25 mm) diameter at 50 in (1.3 m)	Visible red beam	6 ft cable	14101AS6515
Retroreflector ³				50 in (1.5 iii)		3-pin micro AC connector	14101ASQD05 🐱

Field of View

1 in (25 mm)

diameter at

50 in (1.3 m)

Sensing Beam

Visible red beam

Three-Wire and Four-Wire Sensors

	Operating Voltage	Sensing Range ⁽¹⁾	Optimum Range ⁽²⁾	Field of View	Sensing Beam	Connection Type	Catalog Numbe					
	Standard Reflex	x Forward View	ving [©]									
_	20–264 Vac	25 ft (7.6 m)	0.1 to 15 ft	1 in (25 mm)	Visible red beam	6 ft cable	14102A6513					
	50/60 Hz or 15–30 Vdc (NPN)		(0.03 to 4.5 m)	diameter at 50 in (1.3 m)		4-pin micro AC connector	14102AQD03 🔅					
					Infrared beam	6 ft cable	14100A6513					
						4-pin micro AC connector	14100AQD03 🏽					
	10-30 Vdc	25 ft (7.6 m)	0.1 to 15 ft	1 in (25 mm)	Visible red beam	6 ft cable	14102A6517					
	(NPN and PNP)	IP) (0.03 to 4.5 m) diameter at 50 in (1.3 m)		4-pin micro DC connector	14102AQD07 🏽							
					Infrared beam	6 ft cable	14100A6517					
						4-pin micro DC connector	14100AQD07 😀					
t	Standard Refle	x Right Angle V	iewing 6									
	20–264 Vac 50/60 Hz or	15 ft (4.5 m)	0.1 to 10 ft (0.03 to 3 m)	1 in (25 mm) diameter at	Visible red beam	6 ft cable	14102R6513					
	15–30 Vdc (NPN)			50 in (1.3 m)		4-pin micro AC connector	14102RQD03 🏽					
	10-30 Vdc	15 ft (4.5 m)	0.1 to 10 ft	1 in (25 mm) diameter at	Visible red beam	6 ft cable	14102R6517					
	(NPN and PNP)	na PNP)	(0.03 to 3 m)			4-pin micro DC connector	14102RQD07 🖲					
	Polarized Reflex	k Forward View	/ing (4)5									
	20–264 Vac	15 ft (4.5 m)	0.1 to 10 ft	1 in (25 mm)	Visible red beam	6 ft cable	14101A6513					
	50/60 Hz or 15–30 Vdc (NPN)		(0.03 to 3 m)	diameter at 50 in (1.3 m)		4-pin micro AC connector	14101AQD03 🏽					
	10-30 Vdc	15 ft (4.5 m)	0.1 to 10 ft	1 in (25 mm)	Visible red beam	6 ft cable	14101A6517					
	(NPN and PNP)		(0.03 to 3 m)	diameter at 50 in (1.3 m)		4-pin micro DC connector	14101AQD07 🕃					
:	Polarized Reflex	Polarized Reflex Right Angle Viewing @@@										
	20–264 Vac	10 ft (3 m)	0.1 to 5 ft	1 in (25 mm)	Visible red beam	6 ft cable	14101R6513					
	50/60 Hz or 15–30 Vdc (NPN)		(0.03 to 1.5 m)	diameter at 50 in (1.3 m)		4-pin micro AC connector	14101RQD03 🖲					
	10-30 Vdc	10 ft (3 m)	0.1 to 5 ft	1 in (25 mm)	Visible red beam	6 ft cable	14101R6517					
3			diameter at 50 in (1.3 m)		4-pin micro DC connector	14101RQD07 🙂						

Notes

(B) See listing of compatible connector cables on Page V8-T5-62.

^① Ranges based on a 3 in diameter retroreflector.

⁽²⁾ Right Angle viewing polarized reflex models are rated NEMA 1 only.

See Prism Series on Page V8-T5-69 for a Right Angle viewing polarized reflex sensor rated NEMA 4X and 6.

3 Retroreflector is not included.

④ Polarized reflex sensors may not operate with retroreflective tape. Test selected tape prior to installation.

⁽⁶⁾ For complete system, order sensor and retroreflector, see Tab 8, section 8.1.

Diffuse Reflective and Focused Diffuse Reflective Sensors

	Operating Voltage	Sensing Range 1	Optimum Range	Field of View	Sensing Beam	Connection Type	Catalog Number					
e Reflective	Diffuse Reflective Forward Viewing											
rd Viewing	20–264 Vac	8 in (200 mm)	0.1 to 5 in	2 in (50 mm) diameter	Infrared beam	6 ft cable	13106A6513					
(Le	50/60 Hz or 15–30 Vdc (NPN)		(3 to 127 mm)	at 5 in (127 mm)		4-pin micro AC connector	13106AQD03 🕄					
- Carlo		24 in (610 mm)	0.1 to 15 in	5 in (127 mm) diameter	Infrared beam	6 ft cable	13100A6513					
			(3 to 380 mm)	at 15 in (380 mm)		4-pin micro AC connector	13100AQD03 🙁					
	10-30 Vdc	8 in (200 mm)	0.1 to 5 in	2 in (50 mm) diameter	Infrared beam	6 ft cable	13106A6517					
	(NPN and PNP)		(3 to 127 mm)	at 5 in (127 mm)		4-pin micro DC connector	13106AQD07 🏽					
		24 in (610 mm)	0.1 to 15 in	5 in (127 mm) diameter	Infrared beam	6 ft cable	13100A6517					
			(3 to 380 mm)	at 15 in (380 mm)		4-pin micro DC connector	13100AQD07 🙁					
Reflective	Diffuse Reflecti	ve Right Angle \	/iewing									
ht Angle Viewing	20–264 Vac	8 in (200 mm)	0.1 to 5 in	2 in (50 mm) diameter	Infrared beam	6 ft cable	13106R6513					
	50/60 Hz or 15–30 Vdc (NPN)		(3 to 127 mm)	at 5 in (127 mm)		4-pin micro AC connector	13106RQD03 🙁					
	13-30 vac (m m)	24 in (610 mm)	0.1 to 15 in	5 in (127 mm) diameter	Infrared beam	6 ft cable	13100R6513					
			(3 to 380 mm)	at 15 in (380 mm)		4-pin micro AC connector	13100RQD03 🙁					
	10-30 Vdc	8 in (200 mm)	0.1 to 5 in	2 in (50 mm) diameter at 5 in (127 mm) 5 in (127 mm) diameter	Infrared beam	6 ft cable	13106R6517					
	(NPN and PNP)		(3 to 127 mm)			4-pin micro DC connector	13106RQD07 🕄					
		24 in (610 mm)	0.1 to 15 in		Infrared beam	6 ft cable	13100R6517					
			(3 to 380 mm)	at 15 in (380 mm)		4-pin micro DC connector	13100RQD07 🙁					
Beam Diffuse	Wide Beam Diffuse Reflective Forward Viewing											
tive Forward 1g	20–264 Vac	- · · · · · · · · · · · · · · · · · · ·	/	4.3 in (109 mm) diameter	Infrared beam	6 ft cable	13107AS6513					
(I	50/60 Hz or 15–30 Vdc (NPN)		(3 to 101 mm)	at 3 in (76 mm)		4-pin micro AC connector	13107ASQD03 🏽					
	10-30 Vdc		0.1 to 4 in (3 to 101 mm)	4.3 in (109 mm) diameter	Infrared beam	6 ft cable	13107AS6517					
	(NPN and PNP)	√ and PNP)		at 3 in (76 mm)		4-pin micro DC connector	13107ASQD07 🖲					
eam Diffuse ive Right Angle	Wide Beam Dif	fuse Reflective F	Right Angle Viev	ving								
g	20–264 Vac	6 in (150 mm)	0.1 to 4 in	4.3 in (109 mm) diameter	Infrared beam	6 ft cable	13107RS6513					
	50/60 Hz or 15–30 Vdc (NPN)		(3 to 101 mm)	at 3 in (76 mm)		4-pin micro AC connector	13107RSQD03 🏵					
	10-30 Vdc	6 in (150 mm)	0.1 to 4 in	4.3 in (109 mm) diameter	Infrared beam	6 ft cable	13107RS6517					
	(NPN and PNP)		(3 to 101 mm)	at 3 in (76 mm)		4-pin micro DC connector	13107RSQD07 🕃					
sed Diffuse	Focused Diffus	e Reflective Forv	ward Viewing									
tive Forward 19	20–264 Vac	Focused at	1.5 to 1.9 in	0.05 in (1.3 mm) diameter	Visible red beam	6 ft cable	13102A6513					
	50/60 Hz or 15–30 Vdc (NPN)			at 1.6 in (40 mm)		4-pin micro AC connector	13102AQD03 🕄					
	10–30 Vdc	Focused at	1.5 to 1.9 in	0.05 in (1.3 mm) diameter	Visible red beam	6 ft cable	13102A6517					
	(NPN and PNP)	1.6 in (40 mm)	(38 to 48 mm)	at 1.6 in (40 mm)		4-pin micro DC connector	13102AQD07 🙁					

(a) See listing of compatible connector cables on Page V8-T5-62.

1 Sensor will detect a 90% reflective white card at this range.

13104RQD25 🕹

13101RS6515 3

13103AQD07 🙂

13101RSQD05 3 🕃

3-pin mini-connector 6 ft cable

3-pin micro AC connector

4-pin micro DC connector

Photoelectric Sensors

PerfectProx Background Rejection Sensors

Operating

Operating

Two-Wire Sensors

Nominal

Optimum

0.5 to 3 in

Optimum

(13 to 76 mm)

	Voltage	Range 1	Range	Range ⁽²⁾	Field of View	Sensing Beam	Connection Type	Catalog Number	
ng	PerfectProx	Forward View	ing						
	90–132 Vac	2 in (50 mm)	0.4 to 1.8 in	2.25 in (57 mm)	0.25 in (6 mm)	Visible red	6 ft cable	13104A6515	
	50/60 Hz or 18–50 Vdc	sharp cutoff	(10 to 45 mm)	and beyond	diameter at 2.25 in (64 mm)		3-pin micro AC connector	13104AQD05 🔕	
					2.20 (0)			3-pin mini-connector	13104AQD25 🕹
		4 in (100 mm)	0.5 to 3 in	5 in (127 mm)	0.35 in (9 mm)		6 ft cable	13101AS6515 3	
		sharp cutoff (13 to 76 mm) and beyond	diameter at 5 in (127 mm)		3-pin micro AC connector	13101ASQD05 3 😧			
					0(12)		3-pin mini- connector	13101ASQD25 3 🐱	
	PerfectProx	Right Angle V	iewing						
ng	90–132 Vac	2 in (50 mm)	0.4 to 1.8 in	2.25 in (57 mm)	0.25 in (6 mm)	Visible red	6 ft cable	13104R6515	
	50/60 Hz or 18–50 Vdc	sharp cutoff	(10 to 45 mm)	and beyond	diameter at 2.25 in (64 mm)		3-pin micro AC connector	13104RQD05 🔕	

5 in (127 mm)

and beyond

Cut-Off

Cut-Off

0.35 in (9 mm)

diameter at

5 in (127 mm)

Three-Wire and Four-Wire Sensors

4 in (100 mm)

sharp cutoff

Nominal

	Voltage	Nominal Range 1	Range	Cut-Off Range ⁽²⁾	Field of View	Sensing Beam	Connection Type	Catalog Number
PerfectProx	PerfectProx	Forward Viewi	ng					
Forward Viewing	20–264 Vac	2 in (50 mm)	0.4 to 1.8 in	2.25 in (57 mm)	0.25 in (6 mm)	Visible red	6 ft cable	13104A6513
i nere	50/60 Hz or 15–30 Vdc	sharp cutoff	(10 to 45 mm)	and beyond	diameter at 2.25 in (64 mm)		4-pin micro AC connector	13104AQD03 🙁
	(NPN)	4 in (100 mm)	0.5 to 3 in	5 in (127 mm)	0.35 in (9 mm)		6 ft cable	13101A6513
		sharp cutoff	(13 to 76 mm)	and beyond	diameter at 5 in (127 mm)		4-pin micro AC connector	13101AQD03 🙁
			0.6 in (15 mm)	Infrared	6 ft cable	13108A6513		
		standard cutoff	(3 to 100 mm)	and beyond	diameter at 6 in (150 mm)		4-pin micro AC connector	13108AQD03 🙁
			0.9 in (23 mm)	6 ft cable	13103A6513			
		standard cutoff	(3 to 150 mm)	and beyond	diameter at 9 in (225 mm)		4-pin micro AC connector	13103AQD03 🙁
	10-30 Vdc	2 in (50 mm)	0.4 to 1.8 in	2.25 in (57 mm)	, ,	Visible red	6 ft cable	13104A6517
	(NPN and PNP)	sharp cutoff	(10 to 45 mm)	and beyond	diameter at 2.25 in (64 mm)		4-pin micro DC connector	13104AQD07 🙁
		4 in (100 mm)	0.5 to 3 in	5 in (127 mm)	0.35 in (9 mm)		6 ft cable	13101A6517
		sharp cutoff	(13 to 76 mm)	and beyond	diameter at 5 in (127 mm)		4-pin micro DC connector	13101AQD07 🙁
		6 in (150 mm)	0.1 to 4 in	9 in (228 mm)	0.6 in (15 mm)	Infrared	6 ft cable	13108A6517
		standard cutoff	(3 to 100 mm)	and beyond	diameter at 6 in (150 mm)		4-pin micro DC connector	13108AQD07 🙁
		9 in (225 mm)	0.1 to 6 in	12 in (304 mm)	0.9 in (23 mm)		6 ft cable	13103A6517

diameter at

9 in (225 mm)

Notes

: See listing of compatible connector cables on Page V8-T5-62.

(3 to 150 mm)

and beyond

- ^① Sensor will detect a 90% reflectance card at this range.
- ⁽²⁾ Sensor will ignore a 90% reflectance card at this range.

standard cutoff

③ Consult factory for approval status.

Comet Series Sensors

Three-Wire and Four-Wire Sensors, continued

Operating Voltage	Nominal Range 1	Optimum Range	Cut-Off Range ②	Field of View	Sensing Beam	Connection Type	Catalog Numbe
ng PerfectProx	Right Angle Vi	ewing					
20–264 Vac		6 ft cable	13104R6513				
50/60 Hz or 15–30 Vdc	sharp cutoff	(10 to 45 mm)	and beyond	diameter at 2.25 in (64 mm)		4-pin micro AC connector	13104RQD03 🕃
(NPN)	4 in (100 mm)	0.5 to 3 in	5 in (127 mm)	0.35 in (9 mm)		6 ft cable	13104RS5013
	sharp cutoff	(13 to 76 mm)	and beyond	diameter at 5 in (127 mm)		4-pin micro AC connector	13104RS5003 🕃
	6 in (150 mm)	0.1 to 4 in	9 in (228 mm)	0.6 in (15 mm)	Infrared	6 ft cable	13108R6513
	standard cutoff	(3 to 100 mm)	and beyond	diameter at 6 in (150 mm)		4-pin micro AC connector	13108RQD03 🏽
	9 in (225 mm)	0.1 to 6 in	12 in (304 mm)	0.9 in (23 mm)		6 ft cable	13103R6513
	standard cutoff	(3 to 150 mm)	and beyond	diameter at 9 in (225 mm)		4-pin micro AC connector	13103RQD03 🕃
10-30 Vdc	2 in (50 mm)	0.4 to 1.8 in	2.25 in (57 mm)	0.25 in (6 mm)	Visible red	6 ft cable	13104R6517
(NPN and PNP	sharp cutoff	(10 to 45 mm)	and beyond	diameter at 2.25 in (64 mm)		4-pin micro DC connector	13104RQD07 🕃
	4 in (100 mm)	0.5 to 3 in	5 in (127 mm)	0.35 in (9 mm)		6 ft cable	13104RS5020
	sharp cutoff	(13 to 76 mm)	and beyond	diameter at 5 in (127 mm)		4-pin micro DC connector	13104RS5007 🕃
	6 in (150 mm)	0.1 to 4 in	9 in (228 mm)	0.6 in (15 mm)	Infrared	6 ft cable	13108R6517
	standard cutoff	(3 to 100 mm)	and beyond	diameter at 6 in (150 mm)		4-pin micro DC connector	13108RQD07 🔅
	9 in (225 mm)	0.1 to 6 in	12 in (304 mm)	0.9 in (23 mm)		6 ft cable	13103R6517
	standard cutoff	(3 to 150 mm)	and beyond	diameter at 9 in (225 mm)		4-pin micro DC connector	13103RQD07 🏵
Fine Spot F	erfectProx Forv	vard Viewing					
20–264 Vac	2 in (50 mm)	0.9 to 1.8 in	2.25 in (57 mm)	0.05 in (1.3 mm)	Visible red	6 ft cable	13105A6513
50/60 Hz or 15–30 Vdc (NPN)	sharp cutoff	(23 to 45 mm)	and beyond	diameter at 1.7 in (43 mm)		4-pin micro AC connector	13105AQD03 🏽
10-30 Vdc	2 in (50 mm)	0.9 to 1.8 in	2.25 in (57 mm)	0.05 in (1.3 mm)		6 ft cable	13105A6517
(NPN and PNP	sharp cutoff	(23 to 45 mm)	and beyond	diameter at 1.7 in (43 mm)		4-pin micro DC connector	13105AQD07 🙂

Notes

(a) See listing of compatible connector cables on Page V8-T5-62.

① Sensor will detect a 90% reflectance card at this range.

 $\ensuremath{^{(2)}}$ Sensor will ignore a 90% reflectance card at this range.

^③ Consult factory for approval status.

Fiber Optic Sensors

Sensing Range (Optimum Range is 50% of Sensing Range) ① **Pre-Assembled Fiber Optic Cables Bulk Length Fibers** ⁽²⁾ Thru-Beam Mode **Diffuse Reflective Mode** Diffuse 0.5 mm 0.5 mm 1 mm 1 mm Thru-Beam Operating Reflective Diameter Diameter Diameter Diameter Voltage Mode Mode Fibers Fibers Fibers Fibers **Connection Type Catalog Number Plastic Fiber Optic** 18 mm Diameter Plastic Fiber Optic Forward Viewing **Forward Viewing** 20-264 Vac 5 in (123 mm) 1.5 in 2.1 in 5 in 0.6 in 1.5 in 6 ft cable 15100A6513 50/60 Hz or (38 mm) (53 mm) (127 mm) (15 mm) (38 mm) 15-30 Vdc 4-pin micro AC connector 15100AQD03 🙂 (NPN) 10-30 Vdc 5 in (123 mm) 1.5 in 2.1 in 5 in 0.6 in 1.5 in 6 ft cable 15100A6517 (NPN and PNP) (38 mm) (53 mm) (127 mm) (15 mm) (38 mm) 15100AQD07 🙂 4-pin micro DC connector **Glass Fiber Optic Adapter** Use our glass fiber optic adapter with any diffuse reflective sensor model-see below for details.

Glass Fiber Optic Adapter

This simple adapter allows glass fiber optic cables to be used with standard Comet Series diffuse reflective sensors.

Glass Fiber Optic Adapter with Hex Wrench,

Glass Fiber Optic Adapter

Three-Wire and Four-Wire Sensors

Sensors	Fibers	Catalog Number
Glass Fiber Optic Adapter with He	x Wrench	
Forward viewing, diffuse reflective sensors (ordered separately, see Page V8-T5-58)	Glass fiber optic cables (ordered separately, see Tab 9, section 9.2) Note: Use only with the E51KF series fibers.	6235A-6501

Notes

3 See listing of compatible connector cables on Page V8-T5-62.

18.3 24.4 30.5 36.6 42

① Ranges are with bare fibers—no lenses. Sensing range is affected by power of sensor, length of fiber optic cable and use of lenses. Lenses will increase ranges. As bulk fiber length increases, sensing range decreases—see table below. For example, for 100 ft of fiber (the total of source and detector fiber lengths), the excess gain shown in gain graphs below would be reduced to about 1/4 its nominal value.

1/20 r EXCESS GAIN LOSS FACTOR 1/10 1/8 1/6 1/4 1/3 1/2 1 **`** 0 20 40 60 80 100 120 140 160 180 200 TOTAL FIBER LENGTH (feet)

TOTAL FIBER LENGTH (m)

^② Sensing range is based on 6 ft (2 m) of plastic 1 mm diameter source and detector fiber optic cable for a total length of 13.1 ft (4 m). To determine performance with longer lengths, see graph above. Compatible fiber optic cables are shown in Tab 9, section 9.1.

Comet Series Sensors

Compatible Connector Cables

Micro-Style,	Standard Cables—Micro [®]								
Straight Female	Voltage Style	Number of Pins	Gauge	Length	Pin Configuration/ Wire Colors (Face View Female Shown)	PVC Jacket Catalog Number	PUR Jacket Catalog Number	IRR PUR Jacket Catalog Number	
	Micro-Sty	le, Straight F	emale						
	AC	3-pin, 3-wire	22 AWG	6 ft (2 m)	2 3 1-Green 2-Red/Black 3-Red/White	CSAS3F3CY2202	CSAS3F3RY2202	_	
		4-pin, 4-wire	22 AWG	6 ft (2 m)	1-Red/Black 2-Red/White 3-Red 4-Green	CSAS4F4CY2202	CSAS4F4RY2202	CSAS4F4102202	
	DC	4-pin, 4-wire	22 AWG	6 ft (2 m)	(1 2) 4 3) 1-Brown 2-White 3-Blue 4-Black	CSDS4A4CY2202	CSDS4A4RY2202	CSDS4A4102202	



Standard Cables – Mini 10



Pin Configuration/ Current Rating at 600V Voltage Number Wire Colors Style of Pins Gauge Length (Face View Female Shown) Catalog Number Mini-Style, Straight Female 13A CSMS3F3CY1602 3-pin 16 AWG 6 ft (2 m) 1-Green $\overline{\mathbb{1}}$ 2-Black 3-White 3) 0

Accessories

Comet Series Sensors

Description	Catalog Number		
Retroreflectors			
Retroreflectors and retroreflective tape	See Tab 8, section 8.1		
Mounting Brackets			
A wide variety of mounting brackets for tubular sensors	See Tab 8, section 8.2		
Flush Mount Bracket			
Contoured design is ideal for flush mounting of Right Angle Comet Series reflex to mounting	6161AS5296		

surface using 1/4-in hardware. No alignment adjustment. Sensor mounts on #4 studs. 304 stainless steel



Flush Mount Bracket

Flush Mount Bracket



Flush Mount Bracket

Same as above except without contour. Ideal for right angle diffuse and thru-beam sensors. 6161AS5297 304 stainless steel

Dimensions, see Page V8-T5-68.

Note

① For a full selection of connector cables, see Tab 10, section 10.1.

Catalog Number

E58KS5200

Comet Series Sensors, continued Description

Adjustable Protective Bracket

Comet Ball Swivel Bracket Allows 360° rotation and 10° vertical tilt. Hole spacing is identical to our 50 and 55 Series 6181AS5200

Heavy-duty bracket protects the sensor from damage. Works with all Comet Series sensors

except two inch PerfectProx models. Ideal for material handling applications with Right Angle reflex sensors. Provides locking vertical and horizontal adjustments for independent

adjustment in each axis. Sensor mounts on #4 studs. 10 ga. painted steel

sensors. Ideal for mounting Right Angle sensors. Made of Noryl.

Accessories

Replacement mounting brackets, nuts and other accessories See Tab 8, sections 8.2 and 8.3 **Connector Cables** A variety of cables, connector blocks and accessories See Tab 10, section 10.1

Dimensions, see Page V8-T5-68.

Technical Data and Specifications

Glass Fiber Optic Adapter

Description	Specification
Sensor specifications	See Comet Series specifications on Page V8-T5-64
Material of construction	Adapter: 360 brass; gasket: silicone
Vibration (sensor/adapter)	30 g over 10 Hz to 2 kHz
Shock (sensor/adapter)	50 g for 10 ms 1/2 sinewave pulse
Enclosure ratings	NEMA 1 ^①

Note

 $^{\scriptsize (1)}\,$ The adapter will resist the entrance of moisture in the area between the lenses and the fiber ends when properly assembled. However, moisture entry is possible during direct high pressure sprays. Since the Comet Series sensors are rated NEMA 1, 2, 3, 4, 4X, 6, 12 and 13, this will not result in damage to the sensors themselves.

۵		
ľ		
Ľ		
3.7	-A-	

Comet Ball Swivel

Bracket

Adjustable Protective Bracket					
1					
1					

Comet Series Sensors

Three-Wire and Four-Wire Sensors

Comet Series Sensors

Description	AC/DC Models AC/DC Models (AC Operation) (DC Operation) DC-Only Models		DC-Only Models	Two-Wire Sensors AC Models	DC Models	
Input voltage	20 to 264 Vac, 50/60 Hz	15 to 30 Vdc (15 to 24 Vdc above 131 °F/55 °C)	10 to 30 Vdc, (10 to 24 Vdc above 131 °F/55 °C)	90 to 132 Vac, 50/60 Hz	18 to 50 Vdc	
Power dissipation	1.5 W maximum	1.5 W maximum	1 W maximum	2 W maximum	2 W maximum	
Output type	VMOS (bi-directional)	NPN (sink)	NPN and PNP (dual outputs)	DMOS	DMOS	
Current switching	300 mA maximum	300 mA maximum	PNP: 100 mA maximum; NPN: 250 mA maximum (NPN: 120 mA maximum above 131 °F/55 °C)	300 mA	300 mA	
Voltage switching	375 V peak maximum	375 V peak maximum	30 Vdc maximum	132 Vac maximum	50 Vdc maximum	
Off-state leakage	250 μA typical; 500 μA maximum			1.7 mA maximum	1.5 mA maximum	
Surge current	2 A maximum	2 A maximum	1 A maximum	1 A maximum	1 A maximum	
On-state voltage drop	-	1.8V at 10 mA; 3.5V at 300 mA	NPN: 400 mV at 10 mA, 1.5V at 250 mA; PNP: 2.4V at 100 mA	10 Vac	8 Vdc	
Response time	10 ms	10 ms	1 ms; 3.5 ms (thru-beam)	32 ms	32 ms	
Time delay	Models with fixed time delay available—contact factory	Models with fixed time delay available—contact factory	Models with fixed time delay available—contact factory	Models with fixed time delay available—contact factory	Models with fixed time delay available—contact factory	
Short circuit protection	1	0	2	Auto reset	Auto reset	
Temperature range						
Thru-beam source	–4 to 158 °F (–20 to 70 °C)	–4 to 158 °F (–20 to 70 °C)	–4 to 158 °F (–20 to 70 °C)	–13 to 131 °F (–25 to 55 °C)	–13 to 131 °F (–25 to 55 °C)	
All others	–40 to 158 °F (–40 to 70 °C)	–40 to 158 °F (–40 to 70 °C)	–40 to 158 °F (–40 to 70 °C)	—	_	
Light/dark operation	Switch selectable	Switch selectable	Switch selectable	Switch selectable	Switch selectable	
Description	All Models					
Enclosure material	Lens: polycarbonate; cable jack	et: PVC; body: structural polyurethar	ne foam (do not expose to concentra	ated acids, alcohols or ketones)		
Cable/connector	Cable versions: 6 ft cable (22 A) Connector versions: Male mini-	NG) and micro-connectors (refer to wirir	ng diagrams for number of pins per	model) on nominal 8 in pigtails		
Vibration and shock	Vibration: 30 g over 10 Hz to 2 k	Hz; shock: 100g for 3 ms 1/2 sine w	ave pulse			

Indicator LED Lights steady when output is ON; flashes when short circuit protection is in latch condition (except two-wire models)

Sunlight immunity PerfectProx: 5000 ft-candles; all others: 10,000 ft-candles

Enclosure ratings NEMA 1, 2, 3, 4, 4X, 6, 12 and 13 3(4); IP69

Notes

① Sensor will turn off immediately when short or overload is detected (indicator LED flashes). Turn power OFF and back ON to reset.

IMPORTANT: During installation, correct power connections must be made first to ensure fail-safe short circuit protection of outputs.

^② Sensor will turn off immediately when short or overload is detected (indicator LED flashes). Sensor will reset when short is removed.

(3) These products conform to NEMA tests as indicated, however, some severe washdown applications can exceed these NEMA test specifications.


In NEMA 6P models available—contact factory.

5

Excess Gain


Thru-Beam Sensors

Thru-Beam



1. 12100A and 12100R detectors using 11100A or 11100R sources 2. 12102A detectors using 11102A sources

PerfectProx Sensors



Reflex (3 In Diameter Retroreflector)

3

RANGE (feet)

100

EXCESS GAIN


1. 14100A/14102A

2. 14102R

3. 14101A

4. 14101R

Diffuse Reflective




5. 13107


6. 13100

7. 13106

Reflex Sensors, Diffuse Reflective Sensors and Focused Diffuse Reflective Sensors




Focused Diffuse Reflective






9. 13102A Minimum



Fiber Optic Sensors (Performance using 13.1 ft [4m] of fiber)


Thru-Beam Mode




- 1. 15100 with 1 mm diameter fibers

2. 15100 with 0.5 mm diameter fibers

Diffuse Reflective Mode



2. 15100 with 0.5 mm diameter fibers




8. 13104R

9. 13105A Typical

10. 13105A Minimum


Glass Fiber Optic Adapters

When Using Single Fibers for Thru-Beam Sensing



Gain using E51KF823 fibers 1. 13100Å Comet 2. 13106A Comet

When Using Duplex Fibers for Diffuse **Reflective Sensing**




Gain using E51KF723 fibers, based on 90% reflective white card 3. 13100A Comet

4. 13106A Comet


Wiring Diagrams

Pin numbers are for reference, rely on pin location when wiring.


AC/DC Models (AC Connection)

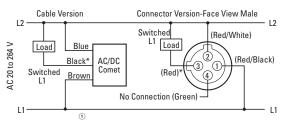

AC Models (AC Connection)

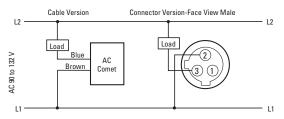


AC/DC Models (DC Connection)

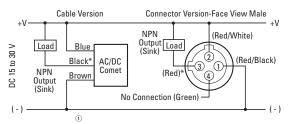


Dimensions

Approximate dimensions in inches (mm), unless otherwise noted


Sensor with Adapter Installed

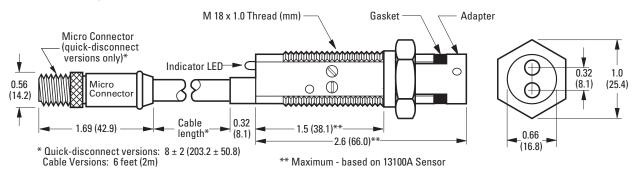

DC Models (Two-Wire)

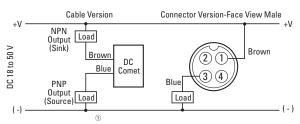

DC Models (Four-Wire)

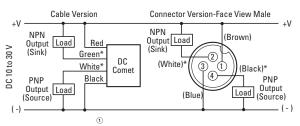

Notes


CAUTION: AC/DC connector version sensors use an AC-type connector. Use of DC power with AC-type connectors may not conform with established standards. For connector versions, the pin numbering and color codes shown are typical of several manufacturers. However, variations are possible. In case of discrepancies, rely on function indicated and pin location rather than pin number or color code.

* No connection when using thru-beam sources.

5

Approximate dimensions in inches (mm), unless otherwise noted

Comet Series Sensor Dimensions and Specifications

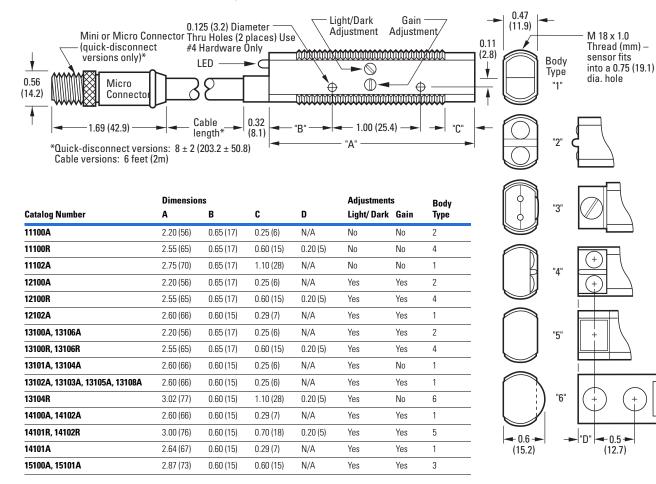


Comet Series Sensors


Approximate dimensions in inches (mm), unless otherwise noted

Accessories


Flush Mount Bracket-6161AS5296

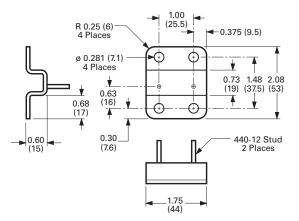


Adjustable Protective Bracket



Comet Ball Swivel Bracket



Flush Mount Bracket-6161AS5297



Prism Series Sensors



Contents

Prism Series Sensors	
Product Overview	70
Product Selection	
Thru-Beam Sensors	70
Reflex and Diffuse Reflective Sensors V8-T5-2	71
Glass Fiber Optic Adapter V8-T5-2	71
Compatible Connector Cables	72
Accessories	72
Technical Data and Specifications	73
Excess Gain	74
Wiring Diagrams	75
Dimensions V8-T5-	76

Prism Series Sensors

Product Description

The Prism Series from Eaton's Electrical Sector is a cost-effective line of miniature photoelectric sensors with twice the optical gain of other sensors in this product class. Forward and Right Angle viewing models feature identical gain and optical characteristics for the best fit on your machine. A gain control allows quick adjustment for peak optical performance in a variety of applications.

Four sensing modes are available, including polarized reflex to eliminate reliability problems when sensing shiny objects. Visible red sensing beams throughout the Prism Series allow you to see exactly where the sensors are aimed for easier setup. Models are available preconfigured in either light or dark operate modes. The unique threaded body with flat sides allows quick mounting in a 3/4 in hole or against any flat surface. Internal components are rigidly sealed in a solid encapsulated package for excellent performance in high-vibration and high-shock applications.

See Page V8-T5-73 for

details on the Prism Series' flexible isolated output.

Features

- Small size for use in a wide variety of applications and locations
- High sensing power for longer ranges and resistance to dust and dirt
- Adjustable gain control to ensure peak optical performance
- High noise immunity which greatly reduces problems associated with electrical noise
- AC/DC models which allow you to order and stock one model for both voltages
- DC only models which offer lower cost options in all sensing modes
- Isolated outputs for wiring flexibility
- Short circuit protection
- Quick 3 ms response time
 on all models
- Highly visible output status LED
- Built-in cable models allow for lowest cost wiring
- Micro-connector models provide for quick installation or replacement
- Custom cable length options

Standards and Certifications

- UL Recognized, E117028
- UL tested to Canadian safety standards
- CE (DC reflex forward viewing only)
- RoHS compliant



DANGER

THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.

For the most current information on this product, visit our website: www.eaton.com/sensors For Customer Service in the U.S. call 915-401-8307, in Canada call 1-800-268-3578. For Application Assistance in the U.S. and Canada call 1-877-ETN CARE (386-2273).

5.6

Photoelectric Sensors

Prism Series

Easy and Flexible Wiring

simplifies wiring because it

acts like a mechanical relav

contact but with solid-state

most convenient available

switching to a different

wire the output.

voltage with the isolated

voltage for the sensor while

contact. NPN or PNP is easily

determined by the way you

speed and reliability. Use the

Prism's isolated output


Product Overview

Product Comparison

Eaton's cost-effective Prism Series, OEM Prism and premium Comet Series all share the same 18 mm flatsided housing. This results in the largest interchangeable sensor family available, allowing you to select from well over 250 different models to solve the widest variety of sensing applications.

Comparison

5



Compared to the similarlooking Comet, the Prism Series is optimized for value, with a basic feature set best suited for OEMs:

- DC and AC/DC versions
- Isolated AC/DC solid-state outputs

Product Selection

Thru-Beam Sensors

Three-Wire and Four-Wire Sensors

	Operating Voltage	Sensing Range	Optimum Range	Field of View	Thru-Beam Component	Connection Type	Light Operate Catalog Number	Dark Operate Catalog Numbe		
n Forward	Thru-Beam F	Forward Viewi	ing							
)	20–132 Vac	20 ft (6 m)	0.1 to 10 ft	20 in (0.5 m)	Source	6 ft cable	11155AA14	11155AA14		
e	50/60 Hz or 15–30 Vdc		(0.03 to 3 m)	diameter at 10 ft (3 m)		4-pin micro AC connector	11155AA04 🙁	11155AA04 🙁		
Recent	10 00 100			10 12 (0 11)	Detector	6 ft cable	12155AL10	12155AD10		
						4-pin micro AC connector	12155AL04 🏽	12155AD04 🕲		
Detector	10-30 Vdc	20 ft (6 m)	0.1 to 10 ft	20 in (0.5 m) diameter at 10 ft (3 m)	Source	6 ft cable	11155AA17	11155AA17		
			(0.03 to 3 m)			4-pin micro DC connector	11155AA07 🏽	11155AA07 🕃		
					Detector	6 ft cable	12155AL10	12155AD10		
						4-pin micro DC connector	12155AL07 🙁	12155AD07 🙁		
n Right Angle	Thru-Beam Right Angle Viewing									
)	20–132 Vac	20 ft (6 m)	0.1 to 10 ft	20 in (0.5 m)	Source	6 ft cable	11155RA14	11155RA14		
e	50/60 Hz or 15–30 Vdc		(0.03 to 3 m)	diameter at 10 ft (3 m)		4-pin micro AC connector	11155RA04 🙂	11155RA04 🙂		
		1010(011)	Detector	6 ft cable	12155RL10	12155RD10				
						4-pin micro AC connector	12155RL04 🙂	12155RD04 🙁		
B	10-30 Vdc	20 ft (6 m)	0.1 to 10 ft	20 in (0.5 m)	Source	6 ft cable	11155RA17	11155RA17		
Detector			(0.03 to 3 m)	diameter at 10 ft (3 m)		4-pin micro DC connector	11155RA07 🕄	11155RA07 🙂		
				(,	Detector	6 ft cable	12155RL10	12155RD10		
						4-pin micro DC connector	12155RL07 😮	12155RD07 🙂		

Wiring Diagrams, see Page V8-T5-75.

Notes

: See listing of compatible connector cables on Page V8-T5-72.

^① Synchronous design requires source and detector to be wired to one another.

"OR" Function

Wiring the Prism Series

With Prism, you can perform

simple "and/or" logic without

the need for the added cost

resistance ratings (25 ohms)

allow Prism sensor outputs to

be wired in series or parallel.


Two common logic examples

of an external controller.

Low leakage (10 µA) and


are shown at right:

for Logic



"AND" Function

ON ON ON



Prism Series Sensors

Reflex and Diffuse Reflective Sensors

	Three-Wir Operating	e and Four-	Wire Sensors Sensing	Optimum			Light Operate	Dark Operate
	Voltage	Туре	Range	Range	Field of View	Connection Type	Catalog Number	Catalog Number
d	Reflex-For	ward Viewing						
	20–132 Vac		15 ft (4.5 m) ③	0.1 to 12 ft	3 in (76 mm)	6 ft cable	14150AL14	14150AD14
	50/60 Hz or 15–30 Vdc	reflex		(0.03 to 3.6 m)	diameter at 12 ft (3.6 m)	4-pin micro AC connector	14150AL04 🙂	14150AD04 🕲
		Polarized	10 ft (3 m) ³	0.1 to 8 ft	,	6 ft cable	14151AL14	14151AD14
		reflex		(0.03 to 2.4 m)		4-pin micro AC connector	14151AL04 🙂	14151AD04 🕲
	10-30 Vdc	Standard	15 ft (4.5 m) ③	0.1 to 12 ft	3 in (76 mm)	6 ft cable	14150AL17	14150AD17
		reflex		(0.03 to 3.6 m)	diameter at 12 ft (3.6 m)	4-pin micro DC connector	14150AL07 🙂	14150AD07 🙁
		Polarized	10 ft (3 m) ③	0.1 to 8 ft		6 ft cable	14151AL17	14151AD17
		reflex		(0.03 to 2.4 m)		4-pin micro DC connector	14151AL07 🙂	14151AD07 🙂
	Reflex-Rig	ht Angle View	ing					
	20–132 Vac 50/60 Hz or 15–30 Vdc	reflex	15 ft (4.5 m) ^③	0.1 to 12 ft (0.03 to 3.6 m) 0.1 to 8 ft (0.03 to 2.4 m)	3 in (76 mm) diameter at 12 ft (3.6 m)	6 ft cable	14150RL14	14150RD14
						4-pin micro AC connector	14150RL04 🙂	14150RD04 🙂
			10 ft (3 m) ③			6 ft cable	14151RL14	14151RD14
						4-pin micro AC connector	14151RL04 🙂	14151RD04 🙂
	10-30 Vdc		15 ft (4.5 m) ^③	0.1 to 12 ft	3 in (76 mm) diameter at 12 ft (3.6 m)	6 ft cable	14150RL17	14150RD17
		reflex		(0.03 to 3.6 m)		4-pin micro DC connector	14150RL07 🙂	14150RD07 🙂
		Polarized reflex	10 ft (3 m) ③	0.1 to 8 ft (0.03 to 2.4 m)		6 ft cable	14151RL17	14151RD17
						4-pin micro DC connector	14151RL07 🕄	14151RD07 😮
—	Diffuse Refle	ective Forward	dViewing					
	20–132 Vac	_	8 in (200 mm) ④	0.15 to 5 in	0.6 in (15 mm)	6 ft cable	13150AL14	13150AD14
	50/60 Hz or 15–30 Vdc			(4 to 127 mm)	diameter at 5 in (127 mm)	4-pin micro AC connector	13150AL04 🕄	13150AD04 🙂
	10-30 Vdc	_	8 in (200 mm) ④	0.15 to 5 in	0.6 in (15 mm)	6 ft cable	13150AL17	13150AD17
				(4 to 127 mm)	diameter at 5 in (127 mm)	4-pin micro DC connector	13150AL07 🏽	13150AD07 🙁
	Diffuse Refle	ective Right A	ngle Viewing					
	20–132 Vac	_	8 in (200 mm) ④	0.15 to 5 in	0.6 in (15 mm)	6 ft cable	13150RL14	13150RD14
	50/60 Hz or 15–30 Vdc			(4 to 127 mm)	diameter at 5 in (127 mm)	4-pin micro AC connector	13150RL04 🕄	13150RD04 🕄
	10-30 Vdc		8 in (200 mm) ④	0.15 to 5 in	6 in (15 mm)	6 ft cable	13150RL17	13150RD17
				(4 to 127 mm)	diameter at 5 in (127 mm)	4-pin micro DC connector	13150RL07 🏵	13150RD07 🏵

Glass Fiber Optic Adapter

This simple adapter allows glass fiber optic cables to be used with standard Comet Series diffuse reflective sensors.



Glass Fiber Optic Adapter

Sensors	Fibers	Catalog Number
Glass Fiber Optic Adapter with H	lex Wrench	
Forward viewing, diffuse reflective sensors (ordered separately, see table above)	Glass fiber optic cables (ordered separately, see Tab 9 , section 9.2)	6235A-6501

Notes

- (B) See listing of compatible connector cables on Page V8-T5-72.
- ^① For complete system, order sensor and retroreflector (see **Tab 8**, **section 8.1**).
- Retroreflector not included.
- ③ Ranges based on a 3 in diameter retroreflector.
- ⁽⁴⁾ Sensor will detect a 90% reflectance white card at this range.





Compatible Connector Cables

Micro-Style, Straight Female	Standard Cables – Micro ^①				Pin Configuration/			
	Voltage Style Number of Pins Gauge Length Pin Configuration/ Wire Colors (Face View Female Shown) PVC Jacket Catalog Number PUR Jacket Catalog Number Micro-Style, Straight Female	IRR PUR Jacket Catalog Number						
0	Micro-Sty	le, Straight F	emale					
	AC		22 AWG	6 ft (2 m)		CSAS4F4CY2202	CSAS4F4RY2202	CSAS4F4102202
	DC		22 AWG	6 ft (2 m)	$\begin{pmatrix} (1) & (2) \\ (1) & (2) \end{pmatrix}$ 2-White 3-Blue	CSDS4A4CY2202	CSDS4A4RY2202	CSDS4A4102202

Accessories

	Prism Series Sensors									
	Description	Catalog Number								
	Retroreflectors									
	Retroreflectors and retroreflective tape	See Tab 8, section 8.1								
	Mounting Brackets									
	A wide variety of mounting brackets for tubular sensors	See Tab 8, section 8.2								
Flush Mount Bracket	Flush Mount Bracket									
-	Contoured design is ideal for flush mounting of Right Angle Prism Series reflex to mounting surface using 1/4 in hardware. No alignment adjustment. Sensor mounts on #4 studs. 304 stainless steel	6161AS5296								
Flush Mount Bracket	Flush Mount Bracket									
	Same as above except without contour. Ideal for right angle diffuse and thru-beam sensors. 304 Stainless Steel	6161AS5297								
Adjustable Protective	Adjustable Protective Bracket									
Bracket	Heavy-duty bracket protects the sensor from damage. Works with all Prism Series sensors. Ideal for material handling applications with Prism right angle reflex sensors. Provides locking vertical and horizontal adjustments for independent adjustment in each axis. Sensor mounts on #4 studs. 10 ga. painted steel	E58KS5200								
Comet/Prism Ball	Comet/Prism Ball Swivel Bracket									
Swivel Bracket	Allows 360° rotation and 10° vertical tilt. Hole spacing is identical to our 50 and 55 Series sensors. Ideal for mounting Right Angle sensors. Made of Noryl.	6181AS5200								
	Accessories									
	Replacement mounting nuts and other accessories	See Tab 8, sections 8.2 and 8.3								
	Connector Cables	שבה ומש ש, שבטנוטווש ט.ב מווע ט.ש								
	A variety of cables, connector blocks and accessories	See Tab 10, section 10.1								
		JEE IGN ID, SECTION ID.1								
	Dimensions, see Page V8-T5-76.									
	Note For a full selection of connector cables, see Tab 10, section 10.1. 									

① For a full selection of connector cables, see Tab 10, section 10.1.

Technical Data and Specifications

Glass Fiber Optic Adapter

Description	Specification
Sensor specifications	See Prism Series specifications below
Material of construction	Adapter: 360 brass; gasket: silicone
Vibration (sensor/adapter)	30 g over 10 Hz to 2 kHz
Shock (sensor/adapter)	50 g for 10 ms 1/2 sinewave pulse
Enclosure ratings	NEMA 1 ^①

Prism Series Sensors

Description	AC/DC Models	DC Only Models		
Input voltage	20 to 132 Vac, 50/60 Hz or 15 to 30 Vdc	10 to 30 Vdc		
Power dissipation	Thru-beam: 2 W maximum; All others: 1.5 W maximum	Thru-beam: 1.5 W maximum; All others: 1 W maximum		
Output type	Solid-state relay	Solid-state relay		
Output isolation	400 V maximum	400 V maximum		
Voltage switching capacity	200 Vac peak; 180 Vdc	200 Vac peak; 180 Vdc		
Current switching capacity	80 mA AC load, 110 mA at 132 Vdc (derate to 100 mA at 180 Vdc)	80 mA AC load, 110 mA at 132 Vdc (derate to 100 mA at 180 Vdc)		
Off-state leakage	10 µA maximum	10 µA maximum		
On-state resistance	25 ohms maximum	25 ohms maximum		
Short circuit protection	Protected (current limited) for loads less than 32 Vac or Vdc $\textcircled{2}$	Protected (current limited) for loads less than 32 Vac or Vdc $^{\textcircled{2}}$		
Response time	3 ms	3 ms		
Light/dark operation	Specified by catalog number	Specified by catalog number		
Temperature range				
Operating	–13 to 131 °F (–25 to 55 °C)	–13 to 131 °F (–25 to 55 °C)		
Storage	–13 to 158 °F (–25 to 70 °C)	–13 to 158 °F (–25 to 70 °C)		
Material of construction	Lens: polycarbonate; cable jacket: PVC; body: structural polyurethane foam ^③	Lens: polycarbonate; cable jacket: PVC; body: structural polyurethane foam ^③		
Cable versions	2 m length, 4-conductor cable; micro 4-pin male connector	2 m length, 4-conductor cable; micro 4-pin male connector		
Connector versions	Micro-connector 4-pin male AC or DC key (by model)	Micro-connector 4-pin male AC or DC key (by model)		
Vibration and shock	Vibration: 30 g over 10 Hz to 2 kHz; shock: 50 g for 10 ms 1/2 sine wave pulse	Vibration: 30 g over 10 Hz to 2 kHz; shock: 50 g for 10 ms 1/2 sine wave pulse		
LED indicator	Thru-beam source: Lights steady when power is ON; all others: Light steady when output is ON	Thru-beam source: Lights steady when power is ON; all others: Light steady when output is ON		
Thru-beam alignment aid	Detector includes a visible LED behind lens that lights steady when beam is complete	Detector includes a visible LED behind lens that lights steady when beam is complete		
Enclosure ratings	NEMA 1, 2, 3, 4, 4X, 6, 12 and 13 @	NEMA 1, 2, 3, 4, 4X, 6, 12 and 13 ④		

Notes

^① The adapter will resist the entrance of moisture in the area between the lenses and the fiber ends when properly assembled. However, moisture entry is possible during direct high pressure sprays. Since the Prism Series sensors are rated NEMA 1, 2, 3, 4, 4X, 6, 12 and 13, this will not result in damage to the sensors themselves.

(2) **IMPORTANT:** Output will reset automatically when short is removed (there is no visual indication of a short circuit condition)

 $\ensuremath{^{\textcircled{3}}}$ Do not expose to concentrated acids, alcohols or ketones.

Photoelectric sensors conform to NEMA tests as indicated above, however, some severe washdown applications can exceed these NEMA
 test specifications.

5.6

5.6

Photoelectric Sensors


Prism Series Sensors

Excess Gain

Thru-Beam Sensors


Thru-Beam


5



Reflex and Diffuse Reflective Sensors


Polarized Reflex (3 in diameter retroreflector)








When Using Single Fibers for Thru-Beam Sensing




Gain using E51KF823 fibers 1. 13150A Prism

When Using Duplex Fibers for Diffuse Reflective Sensing



Gain using E51KF723 fibers, based on 90% reflective white card 2. 13150A Prism





3. 13151 Typical performance

4. 13151 Minimum performance

5

Wiring Diagrams

Pin numbers are for reference, rely on pin location when wiring.

Thru-Beam Sensors


Prism	Violet	Sync +	Violet	Prism
Source	Orange		Orange	Detector
	Brown	Sync –	White	
	Blue		Black	
	Input Po	ower O	utput	

See Prism Series wiring diagrams below for details on wiring power and output.


Prism Series Sensors

AC/DC Models 12


All AC/DC Models (except Thru-Beam)

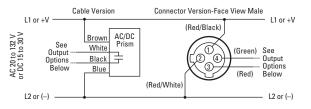

AC/DC Thru-Beam Wiring

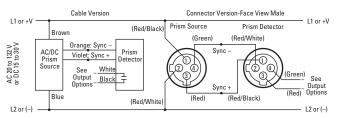


AC/DC Isolated Output Options




Black wires are shown as switched output, however black and gray wires are bidirectional.

DC Models 123


All DC Models (except Thru-Beam)

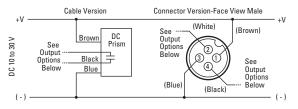

DC Thru-Beam Wiring

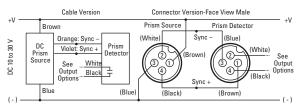

DC Isolated Output Options



Black wires are shown as switched output, however black and gray wires are bidirectional.

Notes


- $^{\odot}\;$ Cable versions: The color codes are the actual wire colors emanating from the sensor.
- ② Connector versions: The pin numbering and wire colors, shown in (), are typical of several manufacturers, however, variations are possible. In case of discrepancies, rely on function indicated and pin location rather than pin number or wire color.
- ^③ Sensor operates on DC voltage, but isolated output can switch AC or DC loads.

Prism Series Sensors


Dimensions

Approximate dimensions in inches (mm) except where noted.


Sensor with Adapter Installed

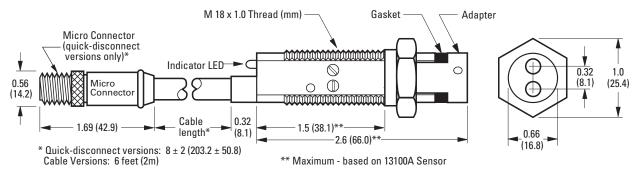

Reflex and Polarized Reflex Models

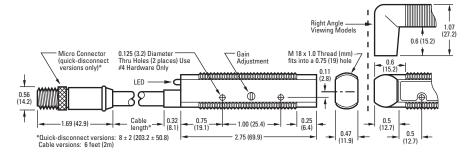


Diffuse Reflective and Thru-Beam Models

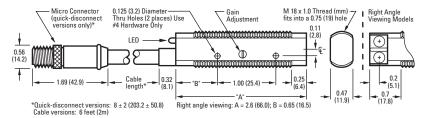


Approximate dimensions in inches (mm)

Accessories


Flush Mount Bracket-6161AS5296

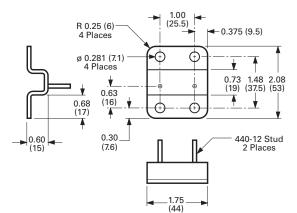


Flush Mount Bracket-6161AS5297



Adjustable Protective Bracket



Comet/Prism Ball Swivel Bracket



OEM Prism Series Sensors



Contents

Description	Page
OEM Prism Series Sensors	
Product Overview	V8-T5-79
Product Selection	V8-T5-79
OEM Prism Series Sensors	V8-T5-79
Compatible Connector Cables	V8-T5-80
Accessories	V8-T5-80
Technical Data and Specifications	V8-T5-81
Excess Gain	V8-T5-81
Wiring Diagrams	V8-T5-82
Dimensions	V8-T5-82

OEM Prism Series Sensors

Product Description

The OEM Prism Series from Eaton's Electrical Sector is very similar to our standard cost-effective Prism Series and has been optimized for high volume OEM use. In place of the isolated output found in the standard models, the OEM Prism features dual or single discrete outputs for simple wiring. In addition, OEM Prism sensors are shipped bulk packaged for easier handling by both the receiver and the installer. Forward and Right Angle viewing models feature identical gain and optical characteristics for the best fit on your machine. A gain control allows quick adjustment for peak optical performance in a variety of applications. Both diffuse reflective and polarized reflex models are available.

All models are 10–30 Vdc only to meet the rising demand for DC sensing solutions. Polarized reflex units eliminate reliability problems when sensing shiny objects. Visible red sensing beams allow you to see exactly where the sensors are aimed for easier setup. Models are available preconfigured in either light or dark operate modes.

The unique threaded body with flat sides allows quick mounting in a 3/4 in hole or against any flat surface. Internal components are rigidly sealed in a solid encapsulated package for excellent performance in high-vibration and high-shock applications.

Features

- Small size for use in a wide variety of applications and locations
- Sensors are shipped bulkpacked for the convenience of high volume users
- High sensing power for longer ranges and resistance to dust and dirt
- Adjustable gain control to ensure peak optical performance
- High noise immunity, which greatly reduces problems associated with electrical noise
- NPN and PNP outputs provided in a single sensor for simple wiring
- Short circuit protection
- Quick 1.2 ms response time
- Output status LED is highly visible from a wide 300° angle
- Cable models allow for lowest cost wiring
- Micro-connector models provide for quick installation or replacement
- Custom cable length
 options

Standards and Certifications

RoHS compliant



DANGER

THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.


For the most current information on this product, visit our website: www.eaton.com/sensors For Customer Service in the U.S. call 915-401-8307, in Canada call 1-800-268-3578. For Application Assistance in the U.S. and Canada call 1-877-ETN CARE (386-2273).

Product Overview

Product Comparison

Eaton's cost-effective Prism Series, OEM Prism and premium Comet Series all share the same 18 mm flatsided housing. This results in the largest interchangeable sensor family available, allowing you to select from well over 250 different models to solve the widest variety of sensing applications.

Comparison



Compared to the similarlooking Comet, the OEM Prism is optimized for value, with a basic feature set best suited for OEMs.

Product Selection

OEM Prism Series Sensors

Three	e-Wire and Four-W	/ire Sensors	3				
Operati Voltage		Optimum Range	Field of View	Output Type	Connection Type	Light Operate Catalog Number	Dark Operate Catalog Number
Polariz	zed Reflex Forward Vi	ewing 12					
10–30 V	′dc 10 ft (3 m)⊛	0.1 to 8 ft (0.03 to 2.4 m)	3 in (76 mm) diameter at 12 ft (3.6 m)	NPN and PNP	6 ft cable	14156AL17B1	14156AD17B1
					4-pin micro DC connector	14156AL07B1 🔃	14156AD07B1 🤃
Polariz	zed Reflex Right Angle	e Viewing 12					
10–30 V	′dc 10 ft (3 m)⊛	0.1 to 8 ft (0.03 to 2.4 m)	3 in (76 mm) diameter at 12 ft (3.6 m)	NPN and PNP	6 ft cable	14156RL17B1	14156RD17B1
					4-pin micro DC connector	14156RL07B1 🕄	14156RD07B1 🕄
Diffus	e Reflective Right Ang	gle Viewing 🛈					
10–30 V	/dc 8 in (200 mm) (6	0.1 to 5 in	2 in (51 mm)	NPN and PNP	6 ft cable	13156RL17B1	13156RD17B1
		(3 to 127 mm)	diameter at 5 in (127 mm)		4-pin micro DC connector	13156RL07B1 🕃	13156RD07B1 🕃
	24 in (609 mm) 🖲		6 in (152 mm)	NPN and PNP	6 ft cable	13157RL17B1	13157RD17B1
		(3 to 381 mm)	diameter at 15 in (381 mm)		4-pin micro DC connector	13157RL07B1 🙁	13157RD07B1 🙁

Notes

- : See listing of compatible connector cables on Page V8-T5-80.
- ^① Contact factory for approval status.
- ⁽²⁾ For a complete system, order sensor and retroreflector (see **Tab 8**, **section 8.1**).
- ³ Retroreflector not included.
- ⁽⁴⁾ Ranges based on a 3 in diameter retroreflector.
- ⁽⁶⁾ Sensor will detect a 90% reflectance white card at this range.

Compatible Connector Cables



	Standar	d Cables –	Micro 1					
e	Voltage Style	Number of Pins	Gauge	Length	Pin Configuration/ Wire Colors (Face View Female Shown)	PVC Jacket Catalog Number	PUR Jacket Catalog Number	IRR PUR Jacket Catalog Number
	Micro-Sty	le, Straight F	emale					

Accessories

	OEM Prism Series Sensors	
	Description	Catalog Number
	Retroreflectors	
	Retroreflectors and retroreflective tape	See Tab 8, section 8.1
	Mounting Brackets	
	A wide variety of mounting brackets for tubular sensors	See Tab 8, section 8.2
ish Mount Bracket	Flush Mount Bracket	
	Contoured design is ideal for flush mounting of right angle OEM Prism Series polarized reflex to mounting surface using 1/4 in hardware. No alignment adjustment. Sensor mounts on #4 studs. 304 stainless steel	6161AS5296
ish Mount Bracket	Flush Mount Bracket	
	Same as above except without contour. Ideal for right angle diffuse sensors. 304 stainless steel	6161AS5297
ljustable Protective acket	Adjustable Protective Bracket Heavy-duty bracket protects the sensor from damage. Works with all OEM Prism Series	E58KS5200
	sensors. Ideal for material handling applications with the OEM Prism Series right angle polarized reflex sensor. Provides locking vertical and horizontal adjustments for independent adjustment in each axis. Sensor mounts on #4 studs. 10 ga. painted steel	
omet/Prism Ball	Comet/Prism Ball Swivel Bracket	
vivel Bracket	Allows 360° rotation and 10° vertical tilt. Hole spacing is identical to our 50 and 55 Series sensors. Ideal for mounting Right Angle sensors. Made of Noryl.	6181AS5200
	Accessories	
	Accessories Replacement mounting nuts and other accessories	See Tab 8, sections 8.2 and 8.3
	Replacement mounting nuts and other accessories	

1 For a full selection of connector cables, see Tab 10, section 10.1.

5

OEM Prism Series Sensors

Photoelectric Sensors


Technical Data and Specifications

OEM Prism Series Sensors

Description	DC Only Models
Input voltage	10 to 30 Vdc
Power dissipation	1 W maximum
Output type	NPN and PNP
Current switching capacity	100 mA maximum
OFF-state leakage	10 µA maximum
ON-state voltage drop	NPN: 2.0 V at 100 mA; PNP: 2.5 V at 100 mA
Short circuit protection	Sensor will turn off immediately when short or overload is detected (indicator LED flashes). Sensor will reset when short is removed.
Response time	1.2 ms
Light/dark operation	Specified by catalog number
Temperature range	
Operating	–13 to 131 °F (–25 to 55 °C)
Storage	–13 to 158 °F (–25 to 70 °C)
Sunlight immunity	1000 ft-candles
Material of construction	Lens: polycarbonate; cable jacket: PVC; body: structural polyurethane foam (do not expose to concentrated acids, alcohols or ketones)
Cable versions	2 m length; 4 conductor cable
Connector versions	Micro-connector, 4-pin male, DC key, on nominal 8 in pigtail
Vibration and shock	Vibration: 30 g over 10 Hz to 2 kHz; shock: 50 g for 10 ms 1/2 sine wave pulse
Indicator LED	Lights steady when output is ON; OFF when output is OFF: OFF when output is in short circuit mode
Enclosure ratings	NEMA 1, 2, 3, 4, 4X, 6, 12 and 13 ^①

Excess Gain


Polarized Reflex (3 in diameter retroreflector)



1. 14156 Typical performance

2. 14156 Minimum performance





- 3. 13157 Typical performance
- 4. 13157 Minimum performance
- 5. 13156 Typical performance
- 6. 13156 Minimum performance

Note

^① Photoelectric sensors conform to NEMA tests as indicated above, however, some severe washdown applications can exceed these NEMA test specifications.

Wiring Diagrams

Pin numbers are for reference, rely on pin location when wiring.


OEM Prism Series Sensors

Operating Voltage	Output	Cable Models	Micro-Connector Models (Face View Male Shown)
Four-Wire Sense	ors		
10–30 Vdc	NPN and PNP	BN +V WH Load BK Load BU (-)	


Dimensions

Approximate dimensions in inches (mm) except where noted.

Polarized Reflex Models

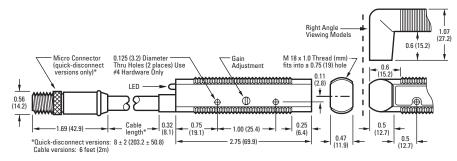


Diffuse Reflective Models

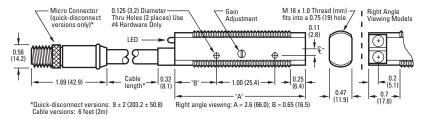


Approximate dimensions in inches (mm)

Accessories


Flush Mount Bracket-6161AS5296

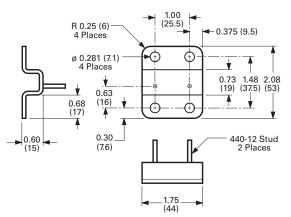


Flush Mount Bracket-6161AS5297



Adjustable Protective Bracket



Comet/Prism Ball Swivel Bracket



E58 Harsh Duty Series Sensors

E58 Harsh Duty Series Sensors



Contents

Description	Page
E58 Harsh Duty Series Sensors	
Product Overview	V8-T5-85
Product Selection	V8-T5-85
Thru-Beam and Reflex Sensors	V8-T5-86
PerfectProx Background Rejection Sensors	V8-T5-87
Compatible Connector Cables	V8-T5-88
Accessories	V8-T5-88
Options	V8-T5-89
Technical Data and Specifications	V8-T5-90
Excess Gain	V8-T5-91
Wiring Diagrams	V8-T5-91
Dimensions	V8-T5-92

E58 Harsh Duty Series Sensors

Product Description

The E58 Harsh Duty Series by Eaton's Electrical Sector was designed to withstand your harshest physical, chemical and optical environments.

Extensive research dictated the choice of materials used in this sensor. Stainless steel, PVDF and tempered glass components are mechanically assembled using Viton[®] seals to ensure complete sealing and resistance to industry chemicals. All adhesives and potting subject to failure from chemical attack have been eliminated from the design. The result is a sensor highly resistant to chemical attack and moisture intrusion, that can withstand heavy shock and vibration in almost any application.

E58 Harsh Duty sensors feature unparalleled optical performance. They are ideal for automotive applications where exposure to lubricants, cutting fluids, coolants and glycols is common. For food processing applications, a smooth body version simplifies high-pressure chemical washdowns, and withstands the use of sanitizers, surfactants, and cleaning agents including diluted bases and acids.

Features

- Sensors are available in 18 mm and 30 mm diameters
- Highly refined optics for long sensing ranges and to see through high levels of contamination unmatched optical performance
- PerfectProx technology provides exceptional background rejection and extremely high excess gain

- Resistant to the wide range of chemicals used in the automotive, food processing and forest products industries
- Suitable for high temperature, high pressure washdown (1200 psi)
- Mechanical Viton seals hold up to extreme temperature variations
- Visible sensing beam on all models lets you see where the beam is aimed for quick setup and alignment
- Output status indicator is the brightest available and is visible from any angle and in any lighting condition
- The industry's only background rejection sensors with a two-wire circuit design
- Models available with both AC and DC operation in a single unit
- Four-wire DC sensors offer dual NPN and PNP outputs

Standards and Certifications

- UL Listed, E166051UL tested to Canadian
- safety standards
- CE (DC models only)
- RoHS compliant



DANGER

THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.

For the most current information on this product, visit our website: www.eaton.com/sensors For Customer Service in the U.S. call 915-401-8307, in Canada call 1-800-268-3578. For Application Assistance in the U.S. and Canada call 1-877-ETN CARE (386-2273).

E58 Harsh Duty Series Sensors

Product Overview

E58 Harsh Duty Series Sensors Physical Attributes

Rugged physical construction

The E58 Harsh Duty Series was designed from the ground up to be the most rugged sensor family available. The strong metal housing, mechanical seals and surface mount electronics withstand heavy shock and vibration. The tempered glass lens cover provides protection in abrasive environments, and the sturdy cable is physically clamped to the sensor body.

Exceptional environmental protection and chemical resistance

The E58 Harsh Duty Series was designed to be used in the automotive, food processing and forest products industries. It is also well suited for applications in related industries such as pulp and paper, car wash and steel. These industries are all physically demanding on equipment and that's why we designed and tested these sensors to extreme levels of shock and vibration.

Many sensor failures, however, are actually due to chemical attack so we had to make them stand up to constant chemical exposure—day in and day out. To ensure resistance to the widest possible range of chemicals, we conducted extensive studies of the chemical agents commonly used in these industries. We then selected only those materials that could

withstand exposure to these chemicals without failure in the design of the E58 Harsh Duty Series. In addition, we eliminated adhesives in favor of more reliable Viton compression seals. Some of the more common chemicals against which this sensor has been tested are listed in the resistance chart.

This resistance chart reflects testing of the 303 stainless steel body used on the standard E58 Harsh Duty Series sensors. Additional chemical resistance for food industry applications is available using sensors with the optional 316 stainless steel body and hard-coated polycarbonate (or acrylic on reflex models) lens cover.

The E58 Harsh Duty Series was designed to resist the chemicals shown in this table under normal use and conditions. Extremes of environmental factors such as temperature, pressure, concentration, duration of exposure, ultraviolet sunlight and chemical interactions combined with the presence of these chemicals could result in premature material failure. For these cases, testing the sensor in the specific application is recommended.

E58 Harsh Duty Series Sensors Chemical Resistance Chart

Chemical Category	Commonly Found In
Oils, cutting fluids, aqueous coolants	Automotive, forest industry
Vegetable and mineral oil	Automotive, forest industry
Surfactants	Automotive, food processing
Dilute acids	Food processing
Dilute bases	Food processing
Sanitizers	Food processing

Sensing Modes


PerfectProx

This is a unique type of diffuse reflective sensor that combines extremely high sensing power (called "excess gain") with a sharp optical cutoff to ignore backgrounds. This allows the sensor to reliably detect targets regardless of variations in color, reflectance, contrast or surface shape, while ignoring objects just slightly outside the target range. With PerfectProx, the E58 Harsh Duty Series can act just like an inductive prox sensor-but with up to 20 times the range for mounting away from a moving target so you can avoid damage and downtime. 18 mm and 30 mm sizes, two-, three- and four-wire circuits. and cable, micro- and miniconnector terminations mean quick and easy replacement of damaged proximity sensors. A visible sensing beam lets you auickly confirm the sensor is aligned correctly in the application.

The 18 mm PerfectProx has a sensing range of 2 or 4 in (50 or 100 mm), and the 30 mm version has a range of 6 or 11 in (150 or 280 mm).

This simplified application example shows the power of the PerfectProx.

Application Example



If the hole is present in the gear, the sensor will shine through the hole and ignore the belt—no detection event will occur.

If the hole in the gear is missing, the sensor will detect the surface of the gear and reject the part.

Thru-Beam

This sensing mode is available in the 30 mm models. Rated sensing range is 800 ft, among the longest ranges available on the market. This provides extremely high excess gain when the source and detector are positioned at closer, optimum ranges to see through high levels of contamination. A visible red sensing beam and wide fieldof-view mean quick and easy installation and alignment.

Polarized Reflex

Another sensing mode available in the 30 mm models is polarized reflex. In this mode, the sensing beam is reflected from a retroreflector back to the sensor. The maximum range of 34 ft is also among the longest available on the sensor market. The polarizing filter built into the sensor ensures only light reflected off a corner cube retroreflector is recognized by the sensor. This allows reliable detection of shiny targets that could reflect light back to the sensor and be missed by a non-polarized version. As in all models, a visible sensing beam is featured for easy installation and alignment.

Three-Wire and Four-Wire Sensors

Optimum

Range

Product Selection

Thru-Beam and Reflex Sensors

Operating

Voltage

30 mm Diameter Thru-Beam Source	30 mm Diameter Thru-Beam 🛈						
	20–132 Vac 50/60 Hz or 15–30 Vdc	800 ft (250 m)	0.1 to 300 ft (0.03 to 90 m)	33 in (830 mm) diameter at 25 ft (7.6 m)	Source		
					Detector		
Detector	10–30 Vdc	800 ft (250 m)	0.1 to 300 ft (0.03 to 90 m)	33 in (830 mm) diameter at 25 ft (7.6 m)	Source		
					Detector		


Sensing

Range

Sensor 20–132 Vac





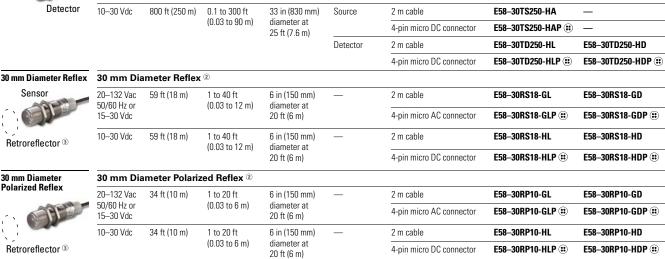

Thru-Beam

Component

Connection Type

4-pin micro AC connector

4-pin micro AC connector

2 m cable

2 m cable

Field of View

Dark Operate

_

Catalog Number

E58-30TD250-GD E58-30TD250-GDP 🙂

Light Operate

Catalog Number

E58-30TS250-GA

E58-30TD250-GL

E58-30TS250-GAP 🔅

E58–30TD250-GLP 🙂

Options, see Page V8-T5-89

Notes

See listing of compatible connector cables on Page V8-T5-88

① For a complete system, order one source and one detector.

⁽²⁾ For a complete system, order sensor and retroreflector (see Tab 8, section 8.1).

3 Retroreflector not included.

E58 Harsh Duty Series Sensors

PerfectProx Background Rejection Sensors

Т	Two-Wire Sensors								
)perating /oltage	Nominal Range ^①	Optimum Range	Cutoff Range ^②	Field of View	Connection Type	Light Operate Catalog Number	Dark Operate Catalog Number	
1	8 mm Dia	meter Perf	ectProx						
	0–132 Vac	2 in	0.4 to 1.8 in	2.25 in (57 mm)	0.25 in (6 mm)	2 m cable	E58–18DP50-EL	E58-18DP50-ED	
	0/60 Hz or 8–50 Vdc	(50 mm)	(10 to 45 mm)	and beyond	diameter at 2 in (50 mm)	3-pin micro AC connector	E58–18DP50-ELP 🜛	E58–18DP50-EDP 🐽	
						3-pin mini-connector	E58–18DP50-ELPB 🔕	E58–18DP50-EDPB 🔕	
		4 in	0.5 to 3 in	5 in (127 mm)	0.38 in (10 mm)	2 m cable	E58-18DP100-EL	E58-18DP100-ED	
		(100 mm)	(13 to 76 mm)	and beyond	diameter at 4 in (100 mm)	3-pin micro AC connector	E58–18DP100-ELP 🔕	E58–18DP100-EDP 🕃	
					,	3-pin mini-connector	E58–18DP100-ELPB 🔕	E58–18DP100-EDPB 👶	
1	8–50 Vdc	2 in (50 mm)	0.4 to 1.8 in (10 to 45 mm)	2.25 in (57 mm) and beyond	0.25 in (6 mm) diameter at 2 in (50 mm)	4-pin micro DC connector	E58–18DP50-DLP 🕃	E58–18DP50-DDP 🕃	
		4 in (100 mm)	0.5 to 3 in (13 to 76 mm)	5 in (127 mm) and beyond	0.38 in (10 mm) diameter at 4 in (100 mm)	4-pin micro DC connector	E58–18DP100-DLP 🏵	E58–18DP100-DDP 🏵	
30 mm Diameter PerfectProx									
	0–132 Vac	6 in	1 to 6 in	6.5 in (165 mm)	0.75 in (19 mm)	2 m cable	E58-30DP150-EL	E58-30DP150-ED	
	0/60 Hz or 8–50 Vdc	(150 mm)	(26 to 150 mm)	and beyond	diameter at 6 in (150 mm)	3-pin micro AC connector	E58–30DP150-ELP 🔕	E58–30DP150-EDP 🍛	
	0 00 100				0 11 (100 1111)	3-pin mini-connector	E58–30DP150-ELPB 🐽	E58–30DP150-EDPB 🔕	
		11 in	1 to 9 in	12.5 in (318 mm)	1.0 in (26 mm)	2 m cable	E58-30DPS280-EL	E58-30DPS280-ED	
		(280 mm)	(26 to 228 mm)		diameter at 11 in (280 mm)	3-pin micro AC connector	E58–30DPS280-ELP 🔕	E58–30DPS280-EDP 🔕	
18–5						3-pin mini-connector	E58–30DPS280-ELPB 🔕	E58–30DPS280-EDPB 🔅	
	8–50 Vdc	6 in (150 mm)	1 to 6 in (26 to 150 mm)	6.5 in (165 mm) and beyond	0.75 in (19 mm) diameter at 6 in (150 mm)	4-pin micro DC connector	E58–30DP150-DLP 🏵	E58–30DP150-DDP 🔅	
C	Options, se	ee Page V8	-T5-89.						

Field of View

0.25 in (6 mm)

diameter at

2 in (50 mm)

Three-Wire and Four-Wire Sensors

Optimum

0.4 to 1.8 in

(10 to 45 mm)

Range

Cutoff

Range 2

2.25 in (57 mm)

and beyond

Nominal

Range 1

18 mm Diameter PerfectProx

(50 mm)

2 in

18 mm Diameter PerfectProx







	4 in	0.5 to 3 in	5 in (127 mm)	0.38 in (10 mm)	2 m cable	E58-18DP100-HL	E58–18DP100-HD E58–18DP100-HDP 🕃	
	(100 mm)	(13 to 76 mm)	and beyond	diameter at 4 in (100 mm)	4-pin micro DC connector	E58–18DP100-HLP 🔅		
30 mm Dia	ameter Perf	ectProx						
20—132 Vac	6 in 1 to 6 in 6.5 in (165 mm)		6.5 in (165 mm)	0.75 in (19 mm)	2 m cable	E58-30DP150-GL	E58-30DP150-GD	
50/60 Hz or 15–30 Vdc	(150 mm)	(26 to 150 mm)	and beyond	diameter at 6 in (150 mm)	4-pin micro AC connector	E58–30DP150-GLP 🏵	E58–30DP150-GDP 🙂	
11 in 1 to	1 to 9 in	12.5 in (318 mm)	1.0 in (26 mm)	2 m cable	E58–30DPS280-GL 🕄	E58–30DPS280-GD 🕄		
	(280 mm)	(26 to 228 mm)		diameter at 11 in (280 mm)	4-pin micro AC connector	E58–30DPS280-GLP 🕄	E58–30DPS280-GDP 🕃	
10–30 Vdc	6 in	1 to 6 in	6.5 in (165 mm)	0.75 in (19 mm)	2 m cable	E58-30DP150-HL	E58-30DP150-HD	
	(150 mm)	(26 to 150 mm)	and beyond	diameter at 6 in (150 mm)	4-pin micro DC connector	E58–30DP150-HLP 🕄	E58–30DP150-HDP 🕃	
	11 in	1 to 9 in	12.5 in (318 mm)	1.0 in (26 mm)	2 m cable	E58-30DPS280-HL	E58-30DPS280-HD	
(280 m	(280 mm)	(26 to 228 mm)		diameter at 11 in (280 mm)	4-pin micro DC connector	E58–30DPS280-HLP 🏵	E58–30DPS280-HDP 🕄	

Connection Type

4-pin micro DC connector

2 m cable

Options, see Page V8-T5-89

Notes

Operating

Voltage

10-30 Vdc

: See listing of compatible connector cables on Page V8-T5-88.

^① Sensor will detect a 90% reflectance card at this range.

^② Sensor will ignore a 90% reflectance card at this range.

Light Operate

Catalog Number

E58-18DP50-HL

E58–18DP50-HLP 🔅

Dark Operate

Catalog Number

E58-18DP50-HD

E58–18DP50-HDP 🕃

E58 Harsh Duty Series Sensors


Standard Cables-Micro ^①

Compatible Connector Cables

Micro-Style, Straight Female	Standar	Standard Cables—Micro [®]									
	Voltage Style	Number of Pins	Gauge	Length	Pin Configuration/ Wire Colors (Face View Female Shown)	PVC Jacket Catalog Number	PUR Jacket Catalog Number	IRR PUR Jacket Catalog Number			
	Micro-Sty	/le, Straight F	emale								
	AC 3-pin, 22 A 3-wire		22 AWG	22 AWG 6 ft (2 m)		CSAS3F3CY2202	CSAS3F3RY2202	_			
		4-pin, 4-wire	22 AWG	6 ft (2 m)	1-Red/Black 2-Red/White 3-Red 4-Green	CSAS4F4CY2202	CSAS4F4RY2202	CSAS4F4102202			
	DC	4-pin, 4-wire	22 AWG	6 ft (2 m)	1-Brown 2-White 3-Blue 4-Black	CSDS4A4CY2202	CSDS4A4RY2202	CSDS4A4102202			

Mini-Style, Straight Female

Standard Cables – Mini 10

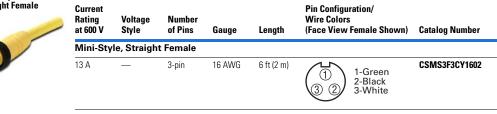

Accessories

E58 Harsh Duty Series Sensors

Description	Reference
Retroreflectors and retroreflective tape	See Tab 8, section 8.1
Mounting brackets	See Tab 8, section 8.2
Mounting nuts and other accessories	See Tab 8, section 8.3
Connector cables	See Tab 10, section 10.1

Note

 $^{\textcircled{}}$ For a full selection of connector cables, see Tab 10, section 10.1.

Options

Sensor options are built-to-order, contact Eaton's Sensor Applications Department at 1-800–426-9184 for delivery lead times.

Thru-Beam and Reflex Sensors

Thru-Beam Apertured Versions

Reduces effective sensing beam to 0.2×0.9 in (5 x 23 mm) for accurate edge detection or sensing smaller objects. Factory installed behind lens cover for protection and sealing. Sensing range is reduced to 230 ft (70 m).

To order, substitute "**070**" in place of "**250**" in source or detector catalog number.

Example: E58–30TS**070**-GA

Food Processing Versions with Threaded Housings

Upgrade to a 316 stainless steel threaded body from 303, and change the lens cover to hard-coated polycarbonate (cast acrylic for reflex models) from glass.

Food Processing Versions with Smooth (Non-Threaded) Housings

Upgrade to a 316 stainless steel smooth (non-threaded) body from 303, and change the lens cover to hard-coated polycarbonate (cast acrylic for reflex models) from glass.

To order, add the suffix "-**FC**" to the end of the catalog number.

Example: E58–30RP10-GL-**FC** To order, add the suffix "-**FSC**" to the end of the catalog number.

Example: E58–30RP10-GL-**FSC**

PerfectProx 30 mm Diameter Model Sensors Only

Food Processing Versions with Threaded Housings

Upgrade to a 316 stainless steel threaded body from 303, and change the lens cover to hard-coated polycarbonate from glass.

To order, add the suffix "**-FC**" to the end of the catalog number.

Example: E58–30DP150-EL-**FC**

Food Processing Versions with Smooth (Non-Threaded) Housings

Upgrade to a 316 stainless steel smooth (non-threaded) body from 303, and change the lens cover to hard-coated polycarbonate from glass.

To order, add the suffix "**-FSC**" to the end of the catalog number.

Example: E58–30DP150-EL-**FSC** E58 Harsh Duty Series Sensors

Technical Data and Specifications

E58 Harsh Duty Series Sensors

	Three-Wire and Four-Wire S	ensors		Two-Wire Sensors	
Description	AC/DC Models (AC Operation)	AC/DC Models (DC Operation)	DC Only Models	AC/DC Models (AC Operation)	DC Only and AC/DC Models (DC Operation)
Input voltage	20–132 Vac, 50/60 Hz	15–30 Vdc	10–30 Vdc	90–132 Vac, 50/60 Hz	18–50 Vdc
Power dissipation	3 W maximum	3 W maximum	2 W maximum	3 W maximum	3 W maximum
Output type	VMOS (bi-directional)	NPN (sink)	Four-wire: NPN and PNP (dual outputs)	18 mm models: DMOS/bipolar; 30 mm models: DMOS	18 mm models: DMOS/bipolar; 30 mm models: DMOS
Current switching	300 mA maximum	300 mA maximum	PNP: 100 mA max. NPN: 18 mm models: 250 mA max.; 30 mm models: 100 mA max.	18 mm models: 100 mA; 30 mm models: 300 mA	18 mm models: 100 mA; 30 mm models: 300 mA
Voltage switching	186 V peak maximum	186 V peak maximum	30 Vdc maximum	186 V peak maximum	50 Vdc maximum
OFF-state leakage	e leakage 250 µA typical: 250 µA typical: 500 µA maximum 500 µA maximum		10 µA maximum	1.7 mA maximum	18 mm models: 1.7 mA max. 30 mm models: 1.5 mA max.
Surge current	2 A maximum	2 A maximum	1 A maximum	1 A AC	1 A DC
ON-state voltage drop	ge drop — 1.8 V at 10 mA 4.0 V at 300 mA		NPN: 1.2 V at 10 mA; 18 mm models: 2.0 V at 100 mA; 30 mm models: 2.0 V at 250 mA; PNP: 2.8 V at 100 mA	10 Vac rms	18 mm models: 10 Vdc 30 mm models: 8 Vdc
Response time	10 ms	2 ms	18 mm models: 1 ms; 30 mm models: 1.6 ms	35 ms	35 ms
Short circuit protection	circuit protection Sensor will turn off Sensor will turn off immediately when a short or overload is detected (indicator LED will flash) ① (indicator LED will flash) ①		immediately when a short or overload is detected	Auto reset	Auto reset
Operating and storage temperature range			–40 to 131 °F (–40 to 55 °C)	18 mm models: -40 to 158 °F (-40 to 70 °C) 30 mm models: -10 to 131 °F (-25 to 55 °C)	18 mm models: -40 to 158 °F (-40 to 70 °C) 30 mm models: -10 to 131 °F (-25 to 55 °C)

Description	All Models						
Enclosure material	Cable jacket: PVC (poly vinyl chloride) Indicator ring: PVDF (high-density fluorinated polymer) Seals: Viton (registered trademark of Dupont) Lens cover: Thru-beam and PerfectProx models: Tempered glass (or hard-coated polycarbonate for models ending in FC or FSC) Polarized reflex models: Glass (or cast acrylic for models ending in FC or FSC) Body: 303 stainless steel (or 316 stainless steel for models ending in FC or FSC)						
Cable versions	2 m cable length						
Connector versions	Male mini- and micro-connectors on 7 in pigtail (refer to model selection for number of pins per model)						
Vibration and shock	Vibration: 30 g over 20 Hz to 2 kHz; shock: 100 g for 3 ms 1/2 sinewave pulse						
Indicator LED	Thru-beam source: Lights when power is ON; all other models: Lights steady when output is ON, flashes when short circuit protection is in latch condition (except two-wire models)						
Sunlight immunity	PerfectProx 5000 ft-candles others: 10,000 ft-candles						
Enclosure ratings	NEMA 1, 2, 3, 3R, 3S, 4, 4X, 6, 6P, 12, 12K and 13 (IP69); This product is suitable for high temperature, high pressure washdown (1200 psi).						
Chemical resistance	This product was designed to withstand chemicals commonly used in the automotive, machine tool, food processing and forest industries.						


Note

① Turn power OFF and back ON to reset. Sensor will reset when short is removed.

Excess Gain

Thru-Beam, Reflex and Polarized Reflex Sensors

All Models

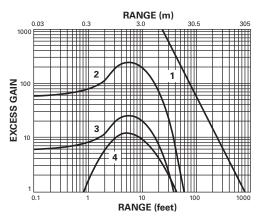

Thru-Beam

1. Thru-beam

Reflex

2. Performance to 3 in retroreflector

Polarized Reflex

3. Performance to 3 in retroreflector

4. Performance to corner-cube retroreflective tape

Wiring Diagrams


Pin numbers are for reference, rely on pin location when wiring.

PerfectProx Background Rejection Sensors

Operating Voltage	Mode/Output	Cable Models	Connector Models (Face View Male S Micro	Shown) Mini
Two-Wire Sense	•		WILLIU	WIIII
90–132 Vac 50/60 Hz or 18–50 Vdc	All	BN L1 or +V BU Load L2 or (-)	L2 or (-) (-) (-) (-) (-) (-) (-) (-) (-) (-)	L1 or (1) +V (2 (3) Load (-)
18–50 Vdc	All (NPN)	BN Load +V BU (-)	(-) (2) (1) Load +V (3) (4) +V	_
	Ali (PNP)	BN +V BU Load (-)	(-) 2 1 +V (-) Load 3 (4) +V	_

PerfectProx Background Rejection Sensors

All Models



PerfectProx

- 1. 18 mm diameter, 2 in (50 mm) range models
 2. 18 mm diameter, 4 in (100 mm) range models
 3. 30 mm diameter, 6 in (150 mm) range models

4. 30 mm diameter, 11 in (280 mm) range models

E58 Harsh Duty Series Sensors

Pin numbers are for reference, rely on pin location when wiring.


E58 Harsh Duty Series Sensors

Operating Voltage	Mode/Output	Cable Models	Micro-Connector Models (Face View Male Shown)
Three-Wire and	Four-Wire Sensors		
20–132 Vac 50/60 Hz or 15–30 Vdc	Thru-beam source	BN L1 or (–) BU L2 or +V	$\begin{array}{c} \underline{L2} \\ \hline 0r + V \\ \hline (3) \\ \hline (4) \\ \hline 0r (-) \\ \hline \end{array}$
	All others	BN L1 or (-) BU L2 or +V	L2 or +V Load 3 1 or (-)
10–30 Vdc	Thru-beam source	BN +V BU (-)	
	All others (NPN and PNP)	BN WH BK BU (-)	(-) (2) (1) (-) (2) (1) +V


Dimensions

Approximate dimensions in inches (mm) except where noted.

18 mm Diameter (Threaded Model Shown)

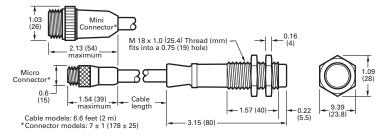

30 mm Diameter (Threaded Model Shown)

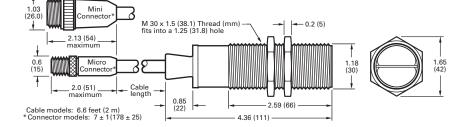

E67 Long Range PerfectProx Series Sensors

E67 Long Range PerfectProx Series Sensors



Contents

Description	Page
E67 Long Range PerfectProx Series Sensors	
Product Selection	V8-T5-94
Accessories	V8-T5-94
Technical Data and Specifications	V8-T5-95
Excess Gain	V8-T5-95
Wiring Diagrams	V8-T5-96
Dimensions	V8-T5-96

5

E67 Long Range PerfectProx Series Sensors

Product Description

The E67 Long Range PerfectProx Series from Eaton's Electrical Sector, the highest performing longrange sensor you can buy with background rejection, is ideal for your most difficult sensing applications.

The E67 Long Range PerfectProx Series reliably detects targets in range regardless of variations in color, reflectance, contrast or surface shape while ignoring objects just slightly outside the target range.

The standard E67 sensor is conveniently pre-set with a six-foot range. Ranges of three to eight feet are available pre-set from the factory.

Features

- PerfectProx technology provides exceptional background rejection and application problem solving
- Extended sensing ranges (up to eight feet) available
- No user adjustments required
- Dual indicators communicate both output and power status from an easy-to-see location at the top of the sensor housing
- Models available with both AC and DC operation in a single unit—up to 132 volts AC and DC
- AC/DC models offer isolated contact output for wiring flexibility
- DC-only sensors offer both NPN and PNP outputs
- Two mounting options for maximum flexibility
- Fully sealed package



THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.

Standards and Certifications

RoHS compliant





For Customer Service in the U.S. call 915-401-8307, in Canada call 1-800-268-3578. For Application Assistance in the U.S. and Canada call 1-877-ETN CARE (386-2273). E67 Long Range PerfectProx Series Sensors

Product Selection

E67 Long Range

E67 Long Range PerfectProx Series Sensors

Four-Wire Sensors

5



Operating Voltage	Sensing Range ⁽¹²⁾	Optimum Range ³	Cutoff Range ④	Field of View	Sensing Beam	Connection Type	Light Operate Catalog Number	Dark Operate Catalog Number
18–30 Vdc	79 in (200 cm)	12 to 60 in (30 to 150 cm)	91 in (230 cm)	6 in (15 cm) diameter at 79 in (200 cm)	Infrared beam	4-pin micro DC connector	E67-LRDP200-HLD 🌐	E67-LRDP200-HDD 🏽
	6	6	6	6	Infrared beam	4-pin micro DC connector	E67-LRDPXXX-HLD 🏵	E67-LRDPXXX-HDD 🤅
20–132 Vac 20–132 Vdc	79 in (200 cm)	12 to 60 in (30 to 150 cm)	91 in (230 cm)	6 in (15 cm) diameter at 79 in (200 cm)	Infrared beam	4-pin, micro AC connector	E67-LRDP200-KLD 🏵	E67-LRDP200-KDD 🕃
	6	6	6	6	Infrared beam	4-pin micro AC connector	E67-LRDPXXX-KLD 🏽	E67-LRDPXXX-KDD (

Compatible Connector Cables



Standard Cables—Micro ®

^É emale	Voltage Style	Number of Pins	Gauge	Length	Pin Configuration/ Wire Colors (Face View Female Shown)	PVC Jacket Catalog Number	PUR Jacket Catalog Number	IRR PUR Jacket Catalog Number
5	Micro-Sty	le, Straight F	emale					
	AC	4-pin, 4-wire	22 AWG	6 ft (2 m)	1-Red/Black 2-Red/White 3-Red 4-Green	CSAS4F4CY2202	CSAS4F4RY2202	CSAS4F4102202
	DC	4-pin, 4-wire	22 AWG	6 ft (2 m)	(1 2) 4 3) 1-Brown 2-White 3-Blue 4-Black	CSDS4A4CY2202	CSDS4A4RY2202	CSDS4A4102202

Accessories

E67 Long Range PerfectProx Series Sensors

Description	Reference
Mounting brackets	See Tab 8, section 8.2
Connector cables	See Tab 10, section 10.1

Notes

- See listing of compatible connector cables on this page.
- ^① Ranges based on an 18 in white card.
- ② Also consider the cutoff range when selecting a sensing range. Guaranteed cutoff will be approximately 12 in (30 cm) beyond the sensing range. If a background is present within this zone, adjustments to the application or the sensing range will need to be made.
- ③ Sensor will detect a 90% reflectance card at this range.
- (a) Sensor will ignore a 90% reflectance card at this range.
- [®] Custom ranges available:
- Sensor Options (Built-to-order, contact Eaton's Sensor Applications Department at 1-800–426-9184 for delivery lead times). The sensing range of this device can be set at the factory to between 60 cm and 240 cm in 10 cm increments. To order, substitute the range (in centimeters) in the model number in place of the standard 200 centimeters. For example, for a device that detects out to 4 ft (4 ft x 12 in/ ft x 2.54 centimeters/in), that equates to 121.92 cm. Rounding up (or down, depending on your needs) to the nearest 10 cm yields a sensing range of 130 cm. Therefore, for a light-operate AC/DC device, you would order E67-LRDP130-KLD.
- ⁽⁶⁾ For a full selection of connector cables, see **Tab 10**, **section 10.1**.


Technical Data and Specifications

E67 Long Range PerfectProx Series Sensors

Description	AC/DC Models	DC Only Models
Input voltage	20 to 132 Vac, 50/60 Hz 20 to 132 Vdc	18 to 30 Vdc
Power dissipation	2 W maximum	0.5 W maximum
Output type	Solid-state relay, 1500 V isolation	NPN and PNP
Voltage switching capacity	400 Vac/dc	30 Vdc
Current switching capacity	75 mA maximum	100 mA maximum
OFF-state leakage	100 μA maximum	50 µA maximum
ON-state characteristics	35 ohms maximum resistance	NPN: 1.5 V drop at 100 mA, maximum PNP: 2.5 V drop at 100 mA, maximum
Short circuit protection	Thermally current limited at approximately 200 mA ^①	Protected against dead shorts only $\widehat{{\rm U2}}$
Response time	50 ms	15 ms
Light/dark operation	Specified by catalog number	Specified by catalog number
Temperature range		
Operating	–31 to 131 °F (–35 to 55 °C)	–31 to 131 °F (–35 to 55 °C)
Storage	–40 to 158 °F (–40 to 70 °C)	–40 to 158 °F (–40 to 70 °C)
Description	All Models	
Material of construction	Enclosure: Lexan® Polycarbonate; back cov indicator viewing window: Lexan® Polycarb 15% glass-filled nylon 6/6; Threaded insert	ionate; jam nut and connector:
Mounting		0–32 threaded inserts type washer for panel thickness between 0.048 in and 0.080 in er and washers to ensure minimum thread engagement of
Connector models	Micro-connector, 4-pin male	
Vibration and shock	Vibrations: 10 g over 10 Hz to 2 kHz; shock:	30 g for 6 ms 1/2 sine wave pulse
Indicator LED	Red: Lights steady when output is on; greer	: Lights steady when power is applied to sensor
Sunlight immunity	5000 ft-candles	
Enclosure ratings	NEMA 1, 2, 3, 4, 4X, 6, 12 and 13 (4)	

Excess Gain

Nominal Unit with Fixed 79 in Sensing Range



Notes

① IMPORTANT: Output will reset automatically when short is removed (there is no visual indication of a short circuit condition).

@ CAUTION: Will not protect against overloads between 100 mA and 250 mA.

③ IMPORTANT: Do not expose to concentrated acids, alcohols or ketones.

(a) These products conform to NEMA tests as indicated, however, some severe washdown applications can exceed these NEMA test specifications.


E67 Long Range PerfectProx Series Sensors


Isolated Output Options

Wiring Diagrams

Pin numbers are for reference, rely on pin location when wiring.


AC/DC Models 12





Sink)	DC PNP (Source)	AC Load	
Red (Pin 3) Green (Pin 4)	Green (Pin 4)	L1 Green 75 mA @ 132 Volts Red (P L2	


DC Only Models 1



Dimensions

Approximate dimensions in inches (mm)

E67 Long Range PerfectProx Series Sensors

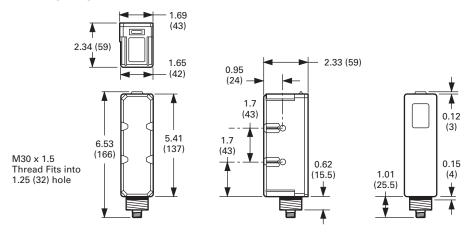

Notes

① Connector versions: The pin numbering and wire colors are typical of several manufacturers, however, variations are possible.

In case of discrepancies, rely on function indicated and pin location rather than pin number or wire color.

⁽²⁾ Sensor operates on DC voltage, but isolated output can switch AC or DC loads.

E51 Limit Switch Style, Modular Sensors

Product Selection

Assembled Sensors

Sensor Heads

Sensor Bodies

Logic Module

Receptacles

Compatible Connector Cables

Accessories

Technical Data and Specifications

Wiring Diagrams

Dimensions

Page

V8-T5-98

V8-T5-98

V8-T5-100

V8-T5-101

V8-T5-102

V8-T5-102

V8-T5-103

V8-T5-103

V8-T5-104

V8-T5-104

V8-T5-105 V8-T5-106



E51 Limit Switch Style, Modular Sensors

Product Description

E51 Limit Switch Style Modular Sensors from Eaton's Electrical Sector are available in thru-beam, reflex, polarized reflex, diffuse reflective and fiber optic sensing modes to solve a wide variety of sensing applications. Modular, plug-in components are easy to maintain, meaning less downtime and reduced inventory. Choose between two-wire sensors with AC/DC operation and fourwire sensors in either AC or DC styles. Connection options include terminal, mini-connector and various lengths of cable. Sensors can be ordered in component form or as fully assembled units.

Features

- Choose from five different sensing modes including fiber optic
- All heads feature a selector switch for light or dark operation
- Logic modules are available to provide additional control functions
- Rugged construction, ideal for industrial environments
- Viton gaskets ensure a positive seal and high chemical resistance
- Sensor heads can be rotated to any of four positions
- Components are interchangeable with E51 proximity sensors
- Sensors accommodate both U.S. and DIN mounting dimensions
- Sensor bodies feature bifurcated engagement prongs for a reliable electrical connection when plugging into receptacle stabs

Standards and Certifications

UL Listed, E166051, E183975

Contents

Description

CSA certified, 50513





THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.

For the most current information on this product, visit our website: www.eaton.com/sensors

For Customer Service in the U.S. call 915-401-8307, in Canada call 1-800-268-3578. For Application Assistance in the U.S. and Canada call 1-877-ETN CARE (386-2273).

E51 Limit Switch Style, Modular Sensors

Product Selection

Assembled Sensors

Reflex,	Diffuse Refle	ctive and l	Г <mark>hru-Beam Se</mark> n	isors				
Sensor Boo	y and Receptacle	•		Two-Wire Sensors	Four-Wire Se	ensors		
			Operating voltage	20–264 Vac/Vdc	120 Vac		10-30 Vdc	
			Output	NO or NC 1	NO and NC co	mplementary	NO and NC co	mplementary
			Sensor body	E51SAL	E51SCL	E51SCN Accepts logic module ^②	E51SNL NPN	E51SPL PNP
0	- ale		Receptacle ⁽³⁾	E51RA	E51RC	E51RCB	E51RN	E51RN
Sensing Range	Response Time	Sensing Beam	Sensor Head Only Catalog Number	Assembled Sensors Catalog Number	with Head, Se	ensor Body and Re	ceptacle	
Reflex								
18 ft (5.5 m)	Standard response	Infrared	E51DP1	E51ALP1	E51CLP1	E51CNP1	E51NLP1	E51PLP1
35 ft (10.7 m) Standard response		E51DP3	_	E51CLP3	E51CNP3	E51NLP3	E51PLP3
Polarized	Reflex							
15 ft (4.5 m)	Standard response	Visible red	E51DP5	_	E51CLP5	E51CNP5	E51NLP5	E51PLP5
Diffuse R	flective							
8 in (200 mm) Standard response	Infrared	E51DP2	E51ALP2	E51CLP2	E51CNP2	E51NLP2	E51PLP2
	Fast response	_	E51DP22	_	E51CLP22	E51CNP22	E51NLP22	E51PLP22
18 in (450 m	m) Standard response		E51DP6	_	E51CLP6	E51CNP6	E51NLP6	E51PLP6
40 in (1 m)	Standard response		E51DP4	_	E51CLP4	E51CNP4	E51NLP4	E51PLP4
Thru-Bea	n Detector							
300 ft (90 m)	Standard response	_	E51DC1	E51ALC1	E51CLC1	E51CNC1	E51NLC1	E51PLC1
Thru-Bea	n Source [®]							
300 ft (90 m	_	Infrared with	E51DEL	E51ELA 6	E51ELA 6	E51ELA 6	E51ELA 6	E51ELA 6
		visible red alignment aid	E51DED	E51EDN ®	E51EDN ®	E51EDN 6	E51EDN 6	E51EDN @

Notes

See listing of compatible connector cables on Page V8-T5-103.

① All sensor heads feature a light or dark operation selector switch which reverses the output function.

- ⁽²⁾ Logic module must be ordered separately, see Page V8-T5-102. These sensor bodies are rated NEMA 4, 4X and 13.
- ⁽³⁾ Receptacles feature terminal wiring with a 1/2 in NPT thread at the conduit entrance. Other connection options are available (see below and Page V8-T5-103).

Connection Option		Suffix	Example
20 mm thread at the conduit entrance		20	E51ALP120
Built-in mini-connector with epoxy filled receptacle	2-wire, 3-pin connector	P3	E51ALP1P3 🐱
	4-wire, 5-pin connector	P5	E51CLP1P5 😯
Pigtail with mini-connector	2-wire, AC/DC	T3	E51RAPT3 👶
	4-wire, AC	T5	E51RCPT5 🕄
	4-wire, DC	T5	E51RNPT5 😯
Pre-wired cable with epoxy filled receptacle	8 ft long	S	E51ALP1S
	12 ft long	S12	E51ALP1S12
	20 ft long	S20	E51ALP1S20

④ Includes sensor head mounted to sensor body. Head can be rotated to any of four discrete positions on body, 90% apart, but is not separate from body.

- ⑤ 120 Vac operation.
- ⑥ 10–30 Vdc operation.

5

E51 Limit Switch Style, Modular Sensors

Four-Wire Sensors

NO and NC complementary

120 Vac



10-30 Vdc

NO and NC complementary

Assembled Sensor



Sensor Heads 1

Glass Fiber Optic, Standard Fiber Mounting Style



Glass Fiber Optic, Collar Fiber Mounting Style



	ale la	Receptacle ⁽³⁾	E51RA	E51RC	E51RCB	E51RN	E51RN
Sensing Range	Response Time	Sensor Head Only Catalog Number	Assembled Se Catalog Numb	nsors with Head, Sen er	sor Body and Recep	tacle	
Glass Fiber Op	otic, Standard	Fiber Mounting St	yle 🍕				
3 in (75 mm) ^(s) 25 in (650 mm) ^(s)	Standard response	E51DF1	_	E51CLF1	E51CNF1	E51NLF1	E51PLF1
1 in (25 mm) 9 in (225 mm) ®	Fast response	E51DF11	_	E51CLF11	E51CNF11	E51NLF11	E51PLF11
Glass Fiber Op	otic, Collar Fib	er Mounting Style	۹				
3 in (75 mm) 25 in (650 mm) ®	Standard response	E51DF3	_	E51CLF3	E51CNF3	E51NLF3	E51PLF3
1 in (25 mm) ©	Fast response	E51DF33	_	E51CLF33	E51CNF33	E51NLF33	E51PLF33

Two-Wire Sensors

20-264 Vac/Vdc

NO or NC ①

Notes

See listing of compatible connector cables on Page V8-T5-103.

Glass Fiber Optic Sensors

Sensor Body and Receptacle

① All sensor heads feature a light or dark operation selector switch which reverses the output function.

Operating voltage

Output

⁽²⁾ Logic module must be ordered separately, see Page V8-T5-102. These sensor bodies are rated NEMA 4, 4X and 13.

③ Receptacles feature terminal wiring with a 1/2 in NPT thread at the conduit entrance. Other connection options are available (see below and Page V8-T5-103).

Connection Option		Suffix	Example
20 mm thread at the conduit entrance		20	E51ALP120
Built-in mini-connector with epoxy filled receptacle	2-wire, 3-pin connector	P3	E51ALP1P3 🕹
	4-wire, 5-pin connector	P5	E51CLP1P5 😯
Pigtail with mini-connector	2-wire, AC/DC	T3	E51RAPT3 🕃
	4-wire, AC	T5	E51RCPT5 😯
	4-wire, DC	T5	E51RNPT5 😯
Pre-wired cable with epoxy filled receptacle	8 ft long	S	E51ALP1S
	12 ft long	\$12	E51ALP1S12
	20 ft long	S20	E51ALP1S20

④ Requires glass fiber optic cables for operation (not included), see Tab 9, section 9.2.

[®] Sensing range for diffuse reflective mode for 0.125 in (3.2 mm) diameter fibers. See Page V8-T5-104 for complete sensing range specifications.

Isensing range in thru-beam mode for 0.125 in (3.2 mm) diameter fibers. See Page V8-T5-104 for complete sensing range specifications.

E51 Limit Switch Style, Modular Sensors

Sensor Heads

Reflex, Diffuse Reflective and Thru-Beam Sensors⁽¹⁾

		Response T	ime						
Sensing Range ②	Field of View	ON AC Sensor	DC Sensor	OFF AC Sensor	DC Sensor	Sensing Beam	Adjustment	Input Voltage	Catalog Numbe
Reflex									
18 ft (5.5 m)	6 in (152 mm) diameter at 15 ft (4.6 m)	20 ms	20 ms	30 ms	22 ms	Infrared	_	_	E51DP1
35 ft (10.7 m)	12 in (305 mm) diameter at 35 ft (10.7 m)	20 ms	20 ms	30 ms	22 ms	Infrared	_	_	E51DP3
Polarized	Reflex								
15 ft (4.5 m)	6 in (152 mm) diameter at 15 ft (4.6 m)	20 ms	20 ms	30 ms	22 ms	Visible red	_	_	E51DP5
Diffuse Re	eflective								
8 in	1 in (25 mm)	20 ms	20 ms	30 ms	22 ms	Infrared	Near/far ³	_	E51DP2
(200 mm)	diameter at 4 in (101 m)	1 ms	0.5 ms	9 ms	0.5 ms	Infrared	Near/far ³	_	E51DP22
18 in (450 mm)	1 in (25 mm) diameter at 9 in (228 m)	20 ms	20 ms	30 ms	22 ms	Infrared	Near/far ^③	_	E51DP6
40 in (1 m)	1.5 in (38 mm) diameter at 40 in (1 m)	20 ms	20 ms	30 ms	22 ms	Infrared	—	—	E51DP4
Thru-Bear	m Detector								
300 ft (90 m)	18 in (457 mm) diameter at 20 ft (6.1 m)	10 ms	5 ms	10 ms	5 ms	_	Sensitivity	—	E51DC1
Thru-Bear	m Source ④								
300 ft (90 m)	36 in (914 mm) diameter at 20 ft (6.1 m)	_	_	_	_	Infrared with visible red alignment aid		120 Vac	E51DEL
_	Bange © Reflex 18 ft (5.5 m) 35 ft (10.7 m) Polarized 15 ft (4.5 m) Diffuse Reflex 8 in (200 mm) 18 in 40 in (1 m) Thru-Beau 300 ft (90 m) Thru-Beau 300 ft	Range Field of View Reflex 18 ft 6 in (152 mm) 18 ft 6 in (152 mm) (5.5 m) diameter at 15 ft (4.6 m) 35 ft 10.7 m) diameter at 35 ft 12 in (305 mm) (10.7 m) diameter at 35 ft 12 in (305 mm) (10.7 m) diameter at 35 ft 12 in (305 mm) (4.5 m) diameter at 15 ft 6 in (152 mm) (4.5 m) diameter at 15 ft (4.6 m) 15 ft (4.6 m) Diffuse Reflective 8 in 8 in 1 in (25 mm) (200 mm) diameter at 9 in (228 m) 40 in 40 in 1.5 in (38 mm) (1 m) diameter at 300 ft 18 in (457 mm) (90 m) diameter at 20 ft (6.1 m) 20 ft (6.1 m) Thru-Beam Source @ 300 ft 300 ft 36 in (914 mm) (90 m) diameter at	Sensing Range (2)Field of View ON AC SensorReflex18 ft (5.5 m)6 in (152 mm) diameter at 15 ft (4.6 m)20 ms35 ft (10.7 m)12 in (305 mm) diameter at 35 ft (10.7 m)20 msPolarized Reflex20 ms15 ft (4.5 m)6 in (152 mm) diameter at 15 ft (4.6 m)20 msDiffuse Reflective20 ms8 in (200 mm)1 in (25 mm) diameter at 15 ft (4.6 m)20 ms18 in (450 mm)1 in (25 mm) diameter at 9 in (228 m)20 ms40 in (1 m)1.5 in (38 mm) diameter at 40 in (1 m)20 msThru-Beam Detector300 ft 20 ft (6.1 m)10 ms300 ft (90 m)18 in (457 mm) diameter at 20 ft (6.1 m)10 msThru-Beam Source (2) 300 ft (90 m)36 in (914 mm) diameter at 20 ft (6.1 m)	Range (a)Field of ViewAC SensorDC SensorReflex18 ft6 in (152 mm)20 ms20 ms18 ft6 in (152 mm)20 ms20 ms20 ms35 ft12 in (305 mm)20 ms20 ms20 ms(10.7 m)diameter at 35 ft (10.7 m)20 ms20 ms20 msPolarized Reflex15 ft6 in (152 mm) diameter at 15 ft (4.6 m)20 ms20 msDiffuse Reflective8 in 	Sensing Range (2)Field of ViewON AC SensorDC SensorDFF AC SensorReflex18 ft6 in (152 mm) diameter at 15 ft (4.6 m)20 ms20 ms30 ms35 ft12 in (305 mm) diameter at 35 ft (10.7 m)20 ms20 ms30 msPolarized Reflex20 ms20 ms30 ms15 ft6 in (152 mm) diameter at 35 ft (10.7 m)20 ms20 ms30 msPolarized Reflex20 ms20 ms30 ms15 ft6 in (152 mm) diameter at 15 ft (4.6 m)20 ms20 ms30 msVertice1 in (25 mm) diameter at 4 in (101 m)20 ms20 ms30 ms18 in (450 mm) diameter at 9 in (228 m)20 ms20 ms30 ms40 in (1 m)1.5 in (38 mm) diameter at 9 in (228 m)20 ms20 ms30 ms40 in (1 m)18 in (457 mm) diameter at 9 in (228 m)20 ms30 ms30 ms40 in (1 m)1.5 in (38 mm) diameter at 20 ft (6.1 m)10 ms5 ms10 msThru-Beam Detector 300 ft18 in (457 mm) diameter at 20 ft (6.1 m)10 ms5 ms10 ms	Sensing Range (2) Field of View ON AC Sensor DC Sensor OFF AC Sensor DC Sensor Reflex 18 ft (5.5 m) 6 in (152 mm) diameter at 15 ft (4.6 m) 20 ms 20 ms 30 ms 22 ms 35 ft (10.7 m) 12 in (305 mm) diameter at 35 ft (10.7 m) 20 ms 20 ms 30 ms 22 ms Polarized Reflex 15 ft (4.6 m) 20 ms 20 ms 30 ms 22 ms 15 ft (4.5 m) 6 in (152 mm) diameter at 15 ft (4.6 m) 20 ms 20 ms 30 ms 22 ms 00 mm 1 in (25 mm) diameter at 4 in (101 m) 20 ms 20 ms 30 ms 22 ms 18 in (450 mm) 1 in (25 mm) diameter at 9 in (228 m) 20 ms 20 ms 30 ms 22 ms 40 in (1 m) 1.5 in (38 mm) diameter at 9 in (228 m) 20 ms 20 ms 30 ms 22 ms 300 ft 18 in (457 mm) diameter at 20 ft (6.1 m) 10 ms 5 ms 10 ms 5 ms 300 ft 36 in (914 mm) 0 diameter at 20 ft (6.1 m) 10 ms 5 ms 10 ms 5 ms	Sensing Range (*)Field of ViewON AC SensorDC SensorOFF AC SensorDC SensorSensing BeamReflex18 ft (55 m)6 in (152 mm) diameter at 15 ft (4.6 m)20 ms20 ms30 ms22 msInfrared35 ft (10.7 m)12 in (305 mm) diameter at 35 ft (10.7 m)20 ms20 ms30 ms22 msInfraredPolarized Reflex15 ft (4.5 m)6 in (152 mm) diameter at 15 ft (4.6 m)20 ms20 ms30 ms22 msVisible redDiffuse Reflective8 in (200 mm)1 in (25 mm) diameter at 15 ft (4.6 m)20 ms20 ms30 ms22 msInfraredDiffuse Reflective8 in (200 mm)1 in (25 mm) diameter at 1 in (20 mm)20 ms20 ms30 ms22 msInfrared18 in (101 m)1 in (25 mm) diameter at 9 in (228 m)20 ms20 ms30 ms22 msInfrared10 in (11 m)20 ms20 ms20 ms30 ms22 msInfrared10 in (11 m)20 ms20 ms30 ms22 msInfrared10 in (11 m)20 ms20 ms30 ms22 msInfrared11 m (11 m)20 ms20 ms30 ms22 msInfrared11 m (11 m)20 ms20 ms30 ms22 msInfrared12 model15 in (38 mm) (30 mit10 ms5 ms10 ms5 ms-10 mit (30 mit36 in (91	Sensing Range (2)Field of ViewON AC SensorDC SensorOFF AC SensorDC SensorSensing BeamAdjustmentReflex18 ft6 in (152 mm) diameter at 35 ft12 ms20 ms20 ms30 ms22 msInfrared35 ft12 in (305 mm) diameter at 35 ft (107 m)20 ms20 ms30 ms22 msInfraredPolarized Reflex15 ft6 in (152 mm) diameter at 35 ft (107 m)20 ms20 ms30 ms22 msVisible redDiffuse Reflective8 in (200 mm)1 in (25 mm) diameter at 4 in (101 m)20 ms20 ms30 ms22 msInfraredNear/far (9)8 in (200 mm)1 in (25 mm) diameter at 9 in (228 m)20 ms20 ms30 ms22 msInfraredNear/far (9)40 in (1 m)1 in (25 mm) diameter at 9 in (228 m)20 ms20 ms30 ms22 msInfraredNear/far (9)40 in (1 m)1 in (25 mm) diameter at 9 in (228 m)20 ms20 ms30 ms22 msInfraredThru-Beam Detector300 ft (90 m)18 in (45 mm) diameter at 20 ft (6.1 m)10 ms5 ms10 ms5 msSensitivitySource (9)Thru-Beam Source (9)300 ft (90 m)36 in (194 mm) diameter at 20 ft (6.1 m)Infrared with meter	Sensing Range ®Field of ViewON AC SensorDC SensorOF AC SensorDC SensorSensing BeamAdjustmentInput VoltageRefex19 ft (55 m)B in (152 mm) diameter at 15 ft (46 m)20 ms20 ms30 ms22 msInfrared35 ft (10.7 m)12 in (305 mm) diameter at 35 ft (10.7 m)20 ms20 ms30 ms22 msInfraredPolarized Reflex as 5 ft (14.6 m)20 ms20 ms20 ms30 ms22 msInfrared15 ft (4.5 m)B in (152 mm) diameter at 15 ft (4.6 m)20 ms20 ms30 ms22 msInfraredNear/far ®Diffuse Reflective i (10 m)20 ms20 ms30 ms22 msInfraredNear/far ®18 in (200 mm)1 in (25 mm) diameter at 9 in (228 m)20 ms20 ms30 ms22 msInfraredNear/far ®18 in (10 m)1 in (25 mm) 9 ms20 ms30 ms22 msInfraredNear/far ®19 in (228 m)20 ms20 ms30 ms22 msInfraredNear/far ®40 in (10 m)15 in (34 mm) 40 in (11 m)20 ms20 ms30 ms22 msInfrared300 ft (90 m)18 in (457 mm) (90 m)10 ms5 ms10 ms5 msSensitivity10 nt (90 m)36 in (1914 mm) diameter at 20 ft

Notes

 $\textcircled{\sc 0}$ All sensor heads feature a light or dark operation selector switch.

- ② Reflex ranges are based on a 3 in retroreflector; diffuse reflective ranges are based on a 90% reflectance white card.
- Interest end of the end of the

Includes sensor head mounted to sensor body. Use receptacles E51RA for AC or E51RN for DC sources. Head can be rotated to any of four discrete positions on body, 90° apart, but is not separate from the body.

E51 Limit Switch Style, Modular Sensors

5.10

Glass Fiber Optic Sensors ^①

Sensing Ran Thru-Beam I	-	Diffuse Refle	ective Mode	Response T	me					
0.063 In Dia. Fibers	0.125 In Dia. Fibers	0.063 In Dia. Fibers	0.125 In Dia. Fibers	ON AC Sensor	DC Sensor	OFF AC Sensor	DC Sensor	Sensing Beam	Adjustment	Catalog Number
 Standard F	iber Mount	ing Style ³								
8 in (200 mm)	25 in (650 mm)	0.6 in (15 mm)	3 in (75 mm)	20 ms	20 ms	30 ms	22 ms	Infrared	_	E51DF1
3 in (75 mm)	9 in (225 mm)	0.25 in (6 mm)	1 in (25 mm)	0.5 ms	0.5 ms	9 ms	0.5 ms	Infrared	_	E51DF11
Collar Fibe	r Mounting	Style 3								
8 in (200 mm)	25 in (650 mm)	0.6 in (15 mm)	3 in (75 mm)	20 ms	20 ms	30 ms	22 ms	Infrared	Sensitivity	E51DF3
3 in (75 mm)	9 in (225 mm)	0.25 in (6 mm)	1 in (25 mm)	0.5 ms	0.5 ms	9 ms	0.5 ms	Infrared	Sensitivity	E51DF33
10 in (250 mm)	40 in (1000 mm)	0.8 in (20 mm)	4.5 in (115 mm)	20 ms	20 ms	30 ms	22 ms	Infrared	—	E51DF4

Sensor Bodies

AC/DC

Two-Wire Sensors

Operating Voltage	Output	Protection	Output Rating Continuous	Туре	Catalog Number
AC/DC					
20–264 Vac/Vdc, 50/60 Hz	One output, load powered, NO or NC, programmable from head; OFF-state leakage current: 1.7 mA at 120 Vac/Vdc, <2.0 mA at 240 Vac	Latching short circuit and overload	0.5 A	_	E51SAL ®

Four-Wire Sensors

	Operating Voltage	Output	Protection	Output Rating Continuous	Туре	Catalog Nur	ıber
AC (E51SCN Shown)	AC						
	120 Vac, 50/60 Hz	Two complementary outputs, line powered, NO and NC	_	1.0 A to 158 °F (70 °C), linearly derated to 0.6 A at 176 °F (80 °C)	-	E51SCL ®	
				1.0 A to 113 °F (45 °C), linearly derated to 0.3 A at 176 °F (80 °C)	Accepts logic modules (see Page V8-T5-102)	E51SCN ®	
DC	DC						
	10-30 Vdc	Two complementary outputs, line powered, NO and NC Burden current: <25 mA OFF-state leakage: <100 µA	Reverse polarity	0.6 A to 104 °F (40 °C), linearly derated to 0.36 A at 176 °F (80 °C)	NPN	E51SNL @	C€
		ON-state: <2.5 Vdc Power-up delay: <150 ms			PNP	E51SPL @	CE

Notes

- ^① All sensor heads feature a light or dark operation selector switch.
- ⁽²⁾ Diffuse reflective ranges are based on a 90% reflectance white card.
- ^③ Requires glass fiber optic cables for operation (not included), see **Tab 9**, **section 9.2**.
- This sensor body is available in a factory-sealed, non plug-in configuration (with 8 ft cable), add 6P to listed catalog number. Example: E51SAL6P.
- ⁽⁵⁾ Sensor body is black. E51SCN sensor bodies are rated NEMA 4, 4X and 13.

5

E51 Limit Switch Style, Modular Sensors

Logic Module



Туре	Reset Time	Description	Timing Range $^{(2)}$	Catalog Number
ON and OFF delay	25 ms minimum	Adjustable delay between time object is sensed and time switch function occurs	0.15 to 15.0 seconds	E51MTB
		Adjustable delay between time object leaves sensing field and time switch transfers back to non-sensing state		

Conduit Entrance

Receptacles

Receptacles	for	E51	Limit	Switch

Descr	iption	Style	Details	Cable Length	1/2 In NPT Catalog Number	20 mm Catalog Number		
Surfa	Surface Mount							
Condui	it entrance, front or rear mounting	2-wire, AC/DC	_	_	E51RA	E51RA20		
		4-wire, AC	Gray	_	E51RC	E51RC20		
			Black ③	_	E51RCB	E51RCB20		
		4-wire, DC	_	_	E51RN	E51RN20		
Built-	In Mini-Connector							
Epoxy 1	filled receptacle with pre-wired mini-connector	2-wire, AC/DC	3-pin	—	E51RAP3 论	_		
		4-wire, AC	5-pin		E51RCP5 😯			
		4-wire, DC	5-pin	_	E51RNP5 🕄	_		
 Pigta	il with Mini-Connector							
	filled receptacle with mini-connector	2-wire, AC/DC	3-pin	3 ft (0.9 m)	E51RAPT3 🐱	_		
mounte	ed on 3 ft (900 mm) cable	4-wire, AC	5-pin	3 ft (0.9 m)	E51RCPT5 😯	_		
_		4-wire, DC	5-pin	3 ft (0.9 m)	E51RNPT5 😯	—		
Prew	ired Cable							
	filled receptacle with pre-wired 16 gauge, yellow	2-wire, AC/DC	3-conductor	8 ft (2.4 m)	E51RAS	E51RA20S		
	jacketed, type SOOW-A cable. Cable enters through hole threaded for conduit			12 ft (3.6 m)	E51RAS12	_		
				20 ft (6 m)	E51RAS20	—		
		4-wire, AC	5-conductor	8 ft (2.4 m)	E51RCS	E51RC20S		
				12 ft (3.6 m)	E51RCS12	_		
				20 ft (6 m)	E51RCS20	_		
		4-wire, DC	5-conductor	8 ft (2.4 m)	E51RNS	E51RN20S		
				12 ft (3.6 m)	E51RNS12	_		
				20 ft (6 m)	E51RNS20	_		

Notes

See listing of compatible connector cables on Page V8-T5-103.

① Rated NEMA 4, 4X and 13.

⁽²⁾ Repeatability of the timing cycle is ±1% at constant voltage, ambient temperature and reset time.

 $\ensuremath{^{\textcircled{3}}}$ Black receptacle is for color compatibility with E51SCN sensor body.

E51 Limit Switch Style, Modular Sensors

Compatible Connector Cables

Standard Cables – Min 1 Style 13A AC/DC 3 pin 16 AWG 6 ft (2 m) 1 - Green 3 - Minite CSMS3F3CY1602 8A AC/DC 5 pin 16 AWG 6 ft (2 m) 1 - Green 3 - Green 3 - Green 5 - Gree	Current Ratir at 600V	g Voltage Style	Number of Pins	Gauge	Length	Pin Configuration/Wire Colors (Face View Female Shown)	Catalog Number		
BA A.C/DC 5-pin 16 AWG 6-ft (2 m) Image: CSMSSD5CYFBC BA A.C/DC 5-pin 16 AWG 6-ft (2 m) Image: CSMSSD5CYFBC EST Limit Switch Style, Modular Sensors Description Catalog Number Universal Mounting Bracket Concluses mounting brackaet Concluses mounting Bracket Conclus Cases Machine Mounting Bracket Conclus Cases Machine Mounting Bracket Conclus Cases Conclus Cases Conclus Cases Conclus Cases Avering the distance of the cases and the cases and the cases and the cases and the cases Conclus Cases Conclus Cases Avering the distance of the case and accessories, see Tab 10, section 10.1	Standard C	ables—Mini Sty	le						
EST Limit Switch Style, Modular Sensors Description Catalog Number Indext and Mounting Bracket ESIKH2 Vertex al Mounting Bracket ESIKH3 Vertex al mounting Bracket ESIKH3 <td>13A</td> <td>AC/DC</td> <td>3-pin</td> <td>16 AWG</td> <td>6 ft (2 m)</td> <td>1-Green 2-Black 3-White</td> <td>CSMS3F3CY1602</td>	13A	AC/DC	3-pin	16 AWG	6 ft (2 m)	1-Green 2-Black 3-White	CSMS3F3CY1602		
Description Catalog Number Universal Mounting Bracket ESIKH2 Universal Mounting Bracket ESIKH4 Two-hole, includes mounting hardware, steel ESIKH4 Machine Mounting Bracket ESIKH4 Two-hole, includes mounting hardware, steel ESIKH4 Machine Mounting Bracket ESIKH4 Zinc die cast ESIKH3 Stand-Off Mounting Bracket ESIKH3 Steel ESIKH3 Permits mounting sensor head up to 3 ft (0.9 m) from sensor body ESIKH3 Connector Cables Avariety of cables, connector blocks and accessories, sen Tab 10, section 10.1	8A	AC/DC	5-pin	16 AWG	6 ft (2 m)	(5) (1) 2-Red 3-Green	CSMS5D5CY160		
Description Catalog Number Universal Mounting Bracket ESIKH2 One-hole, includes mounting hardware, stainless steel ESIKH2 Universal Mounting Bracket ESIKH4 Two-hole, includes mounting hardware, steel ESIKH4 Machine Mounting Bracket ESIKH4 Zine die cast ESOKH3 Stand-Off Mounting Bracket ESIKH3 Zine die cast ESIKH3 Stand-Off Mounting Bracket ESIKH3 Zine die cast ESIKH3 Stand-Off Mounting Bracket ESIKH3 Zine die cast ESIKH3 Steel ESIKH3 Remote Sensor Head Assembly ESIKH3 Permits mounting sensor head up to 3 ft (0.9 m) from sensor body ESIKEM Connector Cables	E51 Limit	: Switch Style	. Modular S	ensors					
Dne-hole, includes mounting hardware, stainless steel ES1KH2 Universal Mounting Bracket ES1KH4 Two-hole, includes mounting hardware, steel ES1KH4 Machine Mounting Bracket ES1KH4 Zinc die cast ES0KH3 Stand-Off Mounting Bracket ES1KH3 Steel ES1KH3 Permits mounting sensor Head Assembly ES1KH3 Permits mounting sensor head up to 3 ft (0.9 m) from sensor body ES1KRM Connector Cables A variety of cables, connector blocks and accessories, see Tab 10, section 10.1						Catalog Numb	per		
Universal Mounting Bracket ESIKH4 Two-hole, includes mounting hardware, steel ESIKH4 Machine Mounting Bracket ESIKH3 Zine die cast ESOKH3 Stand-Off Mounting Bracket ESIKH3 Steel ESIKH3 Permits mounting sensor head up to 3 ft (0.9 m) from sensor body ESIKH3 Connector Cables Zinkeit of cables, connector blocks and accessories, see Tab 10, section 10.1	Universal N	Aounting Bracke	t						
Two-hole, includes mounting hardware, steel E51KH4 Machine Mounting Bracket E50KH3 Zine die cast E50KH3 Stand-Off Mounting Bracket E50KH3 Steel E51KH4 Remote Sensor Head Assembly Permits mounting sensor head up to 3 ft (0.9 m) from sensor body Connector Cables Avariety of cables, connector blocks and accessories, see Tab 10, section 10.1	One-hole, incl	Ides mounting hardwa	are, stainless steel			E51KH2			
Machine Mounting Bracket Zinc die cast E50KH3 Stand-Off Mounting Bracket									
Zinc die cast E50KH3 Stand-Off Mounting Bracket									
Stand-Off Mounting Bracket E51KH3 Steel E51KH3 Permits mounting sensor Head Assembly E51KRM Permits mounting sensor head up to 3 ft (0.9 m) from sensor body E51KRM Connector Cables A variety of cables, connector blocks and accessories, see Tab 10, section 10.1	Machine M	ounting Bracket							
Steel E51KH3 Remote Sensor Head Assembly	Zinc die cast					E50KH3			
Remote Sensor Head Assembly Permits mounting sensor head up to 3 ft (0.9 m) from sensor body E51KRM Connector Cables A variety of cables, connector blocks and accessories, see Tab 10, section 10.1									
Permits mounting sensor head up to 3 ft (0.9 m) from sensor body E51KRM Connector Cables A variety of cables, connector blocks and accessories, see Tab 10, section 10.1						ESIKUS			
Connector Cables A variety of cables, connector blocks and accessories, see Tab 10, section 10.1									
A variety of cables, connector blocks and accessories, see Tab 10, section 10.1	Steel								
	Steel			ensor body		E51KRM			
	Steel Remote Se Permits mount Connector	ing sensor head up to Cables	3 ft (0.9 m) from s			E51KRM			

E51 Limit Switch Style, Modular Sensors


Technical Data and Specifications


E51 Limit Switch Style, Modular Sensors

Description	Specification	
Output ratings (NEMA D150)		
AC/DC models	0.5 A continuous	
AC models	1 A continuous	
DC models	0.6 A continuous	
Protection	Latching short circuit protection on two-wire AC/DC and four-wire DC models	
Indicator LEDs	Lights when output is ON. One LED for each output	
Enclosure material	Zinc die cast	
Gasket material	Viton	
Enclosure ratings	NEMA 3, 3S, 4, 4X, 6, 6P, 12 and 13 (IP67) E51SCN sensor body only: NEMA 4, 4X and 13 \odot	
Hazardous locations ratings		
Class I	Division II—GRPS ABCD	
Class II	Division II—GRPS F and G	
Class III	Division 2	
Temperature range	–13 to 158 °F (–25 to 70 °C)	
Torque requirements	Switch body screws: 25-30 in-lb; Sensing head screws: 14-18 in-lb	
Vibration	10–55 Hz, 1 mm amplitude	
Shock	30 g, 11 ms, 1/2 sine wave	
Humidity	95% noncondensing	

Excess Gain

Sensor Heads-Reflex, Diffuse Reflective and Thru-Beam

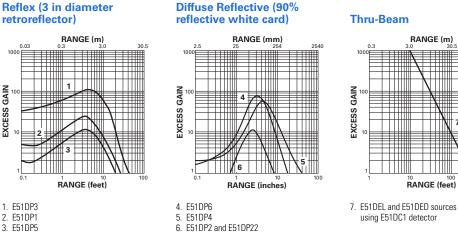



using E51DC1 detector


Note


EXCESS GAIN

① Our products conform to NEMA tests as indicated, however, some severe washdown applications can exceed these NEMA test specifications.

Sensor Heads-Glass Fiber Optic

Diffuse Reflective (90% reflective white card)





E51DF1 and E51DF3 high power sensor head with:

- 1. 0.125 in fiber bundle 2. 0.094 in fiber bundle
- 4. 0.063 in fiber bundle

E51DF33 fast response sensor head with:

- 3. 0.125 in fiber bundle 4. 0.094 in fiber bundle 5. 0.063 in fiber bundle
- 5. 0.063 in fiber bundle

E51DF4 extended range sensor head with:

1. 0.125 in fiber bundle

4. 0.063 in fiber bundle

- E51DF1 and E51DF3 high power sensor head with:
- 0.125 in fiber bundle
 0.094 in fiber bundle

6. 0.063 in fiber bundle **E51DF33 fast response**

sensor head with:

0.125 in fiber bundle
 0.094 in fiber bundle
 0.063 in fiber bundle

Wiring Diagrams

Pin numbers are for reference, rely on pin location when wiring.

E51 Limit Switch Style, Modular Sensors

Operating Voltage	Output ^①	Terminal and Cable Models	Mini-Connector Models (Face View Male Shown)
Two-Wire Sensor	'S		
20–264 Vac or Vdc 50/60 Hz	NO or NC	White 1 Black Load L2 or +V 3 4 Green 1	L2 or (-) Load (2) (3) or +V
Four-Wire Sensor	rs		
120 Vac 50/60 Hz	NO and NC	Black	$\begin{array}{c} L2 \\ \hline \\ L2 \\ \hline \\ N.C. \\ \hline \\ \\ \hline \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ $
10–30 Vdc	NO and NC NPN	+V Green 3 4 (-)	(-) (1) (5) (-) (2) (1) (-) (2) (-) (-) (-) (-) (-) (-) (-) (-) (-) (-
	NO and NC PNP	Black +V 3 4 Green + (-)	(-) Load N.O. +V Load N.O. +V

Note

^① Changing light/dark switch on sensor head will reverse output function (NO becomes NC, and NC becomes NO).

5.10


Photoelectric Sensors

E51 Limit Switch Style, Modular Sensors


Dimensions

Approximate Dimensions in mm [in]

Standard Sensor

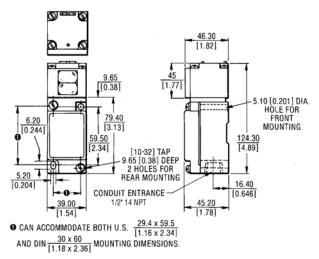


Sensor with Logic Module

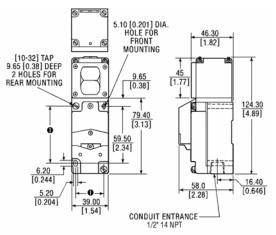


Accessories

Approximate dimensions in inches [mm]

Universal Mounting Bracket-E51KH2




Universal Mounting Bracket-E51KH4

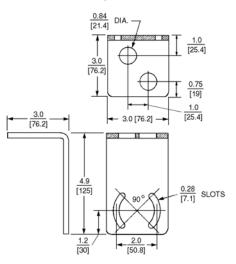


Approximate Dimensions in mm [in]

Machine Mounting Bracket



Stand-Off Mounting Bracket



Approximate dimensions in inches [mm]

E51 Limit Switch Style, Modular Sensors

Remote Sensor Head Assembly

